



RoHS
REACH
HF




REV	MARK	ECN NO.	DESCRIPTION	NAME	DATE

NOTES:
1.ELECTRICAL CHARACTERS:
1-1.RATING: DC 30V 0.5A;
1-2.CONTATCT RESISTANCE:≤30mΩ;
1-3.INSULATION RESISTANCE:≥100MΩ DC 500V;
1-4.WITHSTANDING VOLTAGE:AC 500V 1min;
1-5.LIFE:5,000 CYCLES;
2.MECHANICAL CHARACTERISTICS:
2-1.INSERTION&EXTRACTION FORCE:3~30N;
2-2.OPERATING TEMPERATURE:−30°C~+70°C;

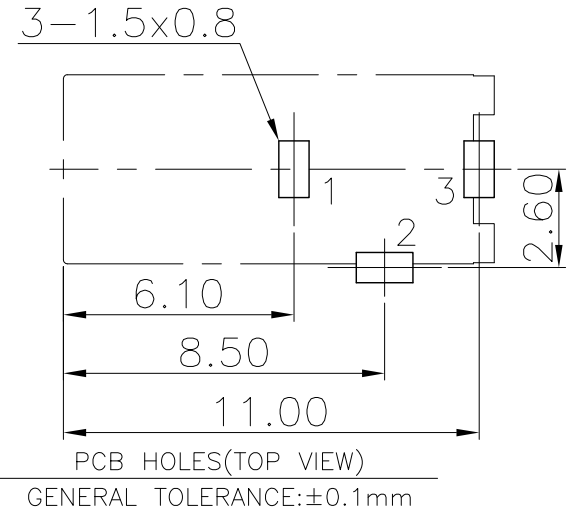

⑥	PIN		1	BRASS	CuSn PLATED
⑤	TERMINAL	3	1	BRASS t=0.3	CuSn PLATED
④	BREAK TERMINAL	2	1	BRASS t=0.3	CuSn PLATED
③	TIP SPRING	1	1	BRONZE t=0.3	SnSb PLATED
②	COVER		1	PBT	BLACK
①	HOUSING		1	PBT	BLACK
No.	PART NAME	TER'NO.	Q'TY	MATERIAL	REMARK

TOLERANCE UNLESS OTHERWISE SPEC		SHENZHEN FUGANG TECHNOLOGY CO.,LTD			
BASIC DIMENSION	TOLERANCE	DSND		TITLE:DC POWER JACK	
	x.x	CHKD		PART NO:FG-DC-0020-1.3	
	x.xx	APVD		DRAWING NO:	
	x.xxx				
ANGLES	±3°			UNIT:mm	SCALE:5:1
				SIZE:A4	SHEET:1/1

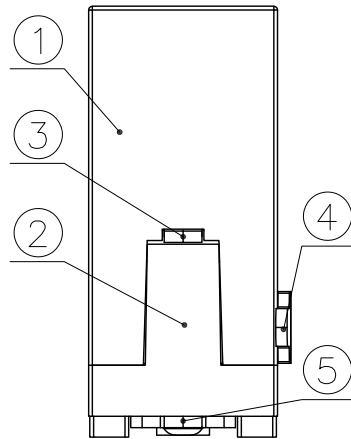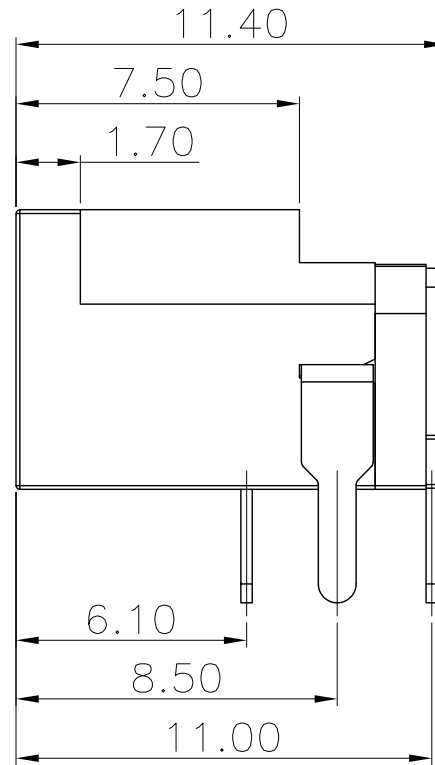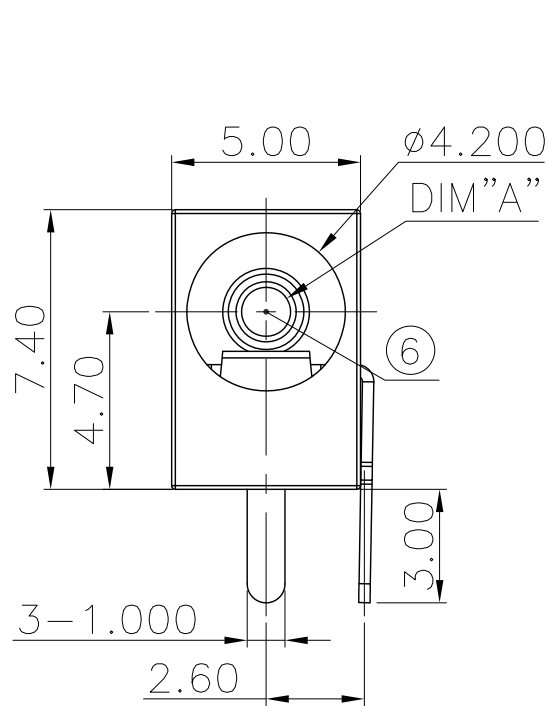

XXX	1.0	1.3
DIM"A"	$\phi 1.0^{+0}_{-0.05}$	$\phi 1.3^{+0}_{-0.05}$