

## Sensor/Actuator cable - SAC-3P-M12MS/ 3,0-PUR/M12FS P - 1442829

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sensor/Actuator cable, 3-position, PUR halogen-free, black-gray RAL 7021, Plug straight M12, A-coded, on Socket straight M12, A-coded, Cable length: 3 m, with plastic knurl

### Why buy this product

- ✓ Easy and safe: 100% electrically tested plug-in components
- ✓ Our standard: robust halogen-free PUR cable
- ✓ Save weight – our connectors with light plastic knurl



### Key commercial data

|                                      |                                                                                                         |
|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit                         | 1 pc                                                                                                    |
| GTIN                                 | <br>4 046356 535731 |
| Weight per Piece (excluding packing) | 88.9 g                                                                                                  |
| Custom tariff number                 | 85444290                                                                                                |
| Country of origin                    | Poland                                                                                                  |
| Note                                 | Made to Order (non-returnable)                                                                          |

### Technical data

#### Dimensions

|                 |     |
|-----------------|-----|
| Length of cable | 3 m |
|-----------------|-----|

#### Ambient conditions

|                                 |                                  |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| Degree of protection            | IP65                             |
|                                 | IP67                             |
|                                 | IP68                             |

#### General

|                       |        |
|-----------------------|--------|
| Rated current at 40°C | 4 A    |
| Rated voltage         | 250 V  |
| Number of positions   | 3      |
| Contact resistance    | ≤ 5 mΩ |

# Sensor/Actuator cable - SAC-3P-M12MS/ 3,0-PUR/M12FS P - 1442829

## Technical data

### General

|                              |                               |
|------------------------------|-------------------------------|
| Insulation resistance        | $\geq 100 \text{ M}\Omega$    |
| Coding                       | A - standard                  |
| Standards/regulations        | M12 connector IEC 61076-2-101 |
| Status display               | No                            |
| Protective circuit/component | Unwired                       |
| Surge voltage category       | II                            |
| Pollution degree             | 3                             |
| Insertion/withdrawal cycles  | $\geq 100$                    |
| Torque                       | 0.4 Nm (M12 connector)        |

### Material

|                                         |                                             |
|-----------------------------------------|---------------------------------------------|
| Inflammability class according to UL 94 | HB                                          |
| Contact material                        | CuSn                                        |
| Contact surface material                | Ni/Au                                       |
| Contact carrier material                | TPU GF                                      |
| Material of grip body                   | TPU, hardly inflammable, self-extinguishing |
| Material, knurls                        | Polyamide                                   |
| Sealing material                        | NBR                                         |

### Cable

|                                               |                                          |
|-----------------------------------------------|------------------------------------------|
| Cable type                                    | PUR halogen-free black                   |
| Cable type (abbreviation)                     | PUR                                      |
| Cable abbreviation                            | Li9Y11Y                                  |
| UL AWM style                                  | 20549                                    |
| Conductor cross section                       | 3x 0.34 mm <sup>2</sup> (signal line)    |
| AWG signal line                               | 22                                       |
| Conductor structure signal line               | 42x 0.10 mm                              |
| Core diameter including insulation            | 1.27 mm $\pm$ 0.02 mm (signal line)      |
| Thickness, insulation                         | $\geq 0.21 \text{ mm}$ (Core insulation) |
|                                               | approx. 0.8 mm (Outer cable sheath)      |
| Wire colors                                   | brown, blue, black                       |
| Overall twist                                 | 3 wires, twisted                         |
| External sheath, color                        | black-gray RAL 7021                      |
| External cable diameter D                     | 4.4 mm $\pm$ 0.15 mm                     |
| Smallest bending radius, fixed installation   | 22 mm                                    |
| Smallest bending radius, movable installation | 44 mm                                    |
| Number of bending cycles                      | 4000000                                  |
| Bending radius                                | 44 mm                                    |
| Traversing path                               | 10 m                                     |
| Traversing rate                               | 3 m/s                                    |
| Acceleration                                  | 10 m/s <sup>2</sup>                      |
| Cable weight                                  | 26 kg/km                                 |

## Sensor/Actuator cable - SAC-3P-M12MS/ 3,0-PUR/M12FS P - 1442829

### Technical data

#### Cable

|                                 |                                                                     |
|---------------------------------|---------------------------------------------------------------------|
| Outer sheath, material          | PUR                                                                 |
| Material conductor insulation   | PP                                                                  |
| Conductor material              | Bare Cu litz wires                                                  |
| Insulation resistance           | $\geq 100 \text{ G}\Omega\cdot\text{km}$ (at 20 °C)                 |
| Conductor resistance            | max. 58 $\Omega/\text{km}$ (at 20 °C)                               |
| Nominal voltage, cable          | $\leq 300 \text{ V}$                                                |
| Test voltage, cable             | $\geq 3000 \text{ V}$                                               |
| Special properties              | Flexible cable conduit capable                                      |
|                                 | Silicone-free                                                       |
|                                 | Free of substances which would hinder coating with paint or varnish |
| Flame resistance                | in accordance with DIN UL-Style 20549                               |
| Halogen-free                    | in accordance with DIN VDE 0472 part 815                            |
| Resistance to oil               | in accordance with DIN EN 60811-2-1                                 |
| Other resistance                | Highly resistant to acids, alkaline solutions and solvents          |
|                                 | hydrolysis and microbe resistant                                    |
|                                 | partly UV-resistant in accordance with DIN EN ISO 4892-2-A          |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation)                        |
|                                 | -25 °C ... 80 °C (cable, flexible installation)                     |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27060306 |
| eCl@ss 4.1 | 27060306 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 27279218 |
| eCl@ss 7.0 | 27279218 |
| eCl@ss 8.0 | 27279218 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC000830 |
| ETIM 3.0 | EC001855 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11     | 31251501 |
| UNSPSC 12.01  | 31251501 |

## Sensor/Actuator cable - SAC-3P-M12MS/ 3,0-PUR/M12FS P - 1442829

### Classifications

#### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 13.2 | 31251501 |
|-------------|----------|

### Approvals

#### Approvals

#### Approvals

#### EAC

#### Ex Approvals

#### Approvals submitted

### Approval details

|     |
|-----|
| EAC |
|-----|

### Accessories

#### Accessories

#### Conductor marking

#### Insert label - PABA WH/15 - 1013151



Insert label, Strip, white, unlabeled, can be labeled with: Plotter, Mounting type: Thread on, Cable diameter: 0.6-50 mm, Lettering field: 15 x 4 mm

#### Insert label - PABA YE/15 - 1013698



Insert label, Strip, yellow, unlabeled, can be labeled with: Plotter, Mounting type: Thread on, Cable diameter: 0.6-50 mm, Lettering field: 15 x 4 mm

## Sensor/Actuator cable - SAC-3P-M12MS/ 3,0-PUR/M12FS P - 1442829

### Accessories

Insert label - PABA RD/15 - 1013944



Insert label, Strip, red, unlabeled, can be labeled with: Plotter, Mounting type: Thread on, Cable diameter: 0.6-50 mm, Lettering field: 15 x 4 mm

---

### Marker carrier cable

Conductor marker carrier - PATO 2/15 - 1013122



Conductor marker carrier, transparent, unlabeled, Mounting type: clip on, Cable diameter: 2.8-4.4 mm, Lettering field: 4 x 15 mm

---

Conductor marker carrier - PATO 3/15 - 1013135



Conductor marker carrier, transparent, unlabeled, Mounting type: clip on, Cable diameter: 4.4-6.7 mm, Lettering field: 4 x 15 mm

---

Conductor marker carrier - PATO 4/15 - 1013148



Conductor marker carrier, transparent, unlabeled, Mounting type: clip on, Cable diameter: 6.7-10 mm, Lettering field: 4 x 15 mm

---

### Marker pen

Marker pen - B-STIFT - 1051993



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

---

### Protective cap

## Sensor/Actuator cable - SAC-3P-M12MS/ 3,0-PUR/M12FS P - 1442829

### Accessories

Sealing cap - PROT-M12 FS-PA-CHAIN - 1430873

M12 sealing cap made of plastic with fixing band, for sensor cables, for free M12 sockets



Screw plug - PROT-M12 MS-PA-CHAIN - 1430899

M12 sealing cap with fixing band, for sensor cables, for free M12 sockets



### Safety locking

Locking clip - SAC-M12-EXCLIP-M - 1558988



Locking clip - SAC-M12-EXCLIP-F - 1558991



### Screwdriver tools

Adapter insert - TSD-M SAC-BIT ADAPTER - 1212600



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

## Sensor/Actuator cable - SAC-3P-M12MS/ 3,0-PUR/M12FS P - 1442829

### Accessories

Tool - SAC BIT M12-D15 - 1208432



Nut for assembling sensor/actuator cables with M12 connector and for M12 connectors with QUICKON fast connection technology, for 4 mm hexagonal drive

---

### Torque tool

Torque screwdriver - TSD 04 SAC - 1208429



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

---

Torque screwdriver - TSD-M 1,2NM - 1212224




Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

---


### Drawings

Schematic diagram



Pin assignment M12 plug, 3-pos., A-coded, view male side


Schematic diagram



Pin assignment socket M 12


## Sensor/Actuator cable - SAC-3P-M12MS/ 3,0-PUR/M12FS P - 1442829

Cable cross section




PUR halogen-free black [PUR]

Dimensioned drawing

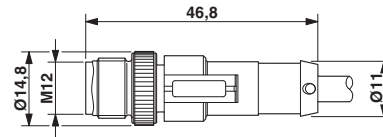


M12 x 1 plug, straight

Dimensioned drawing

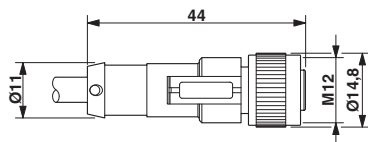

M12 x 1 socket, straight

Circuit diagram

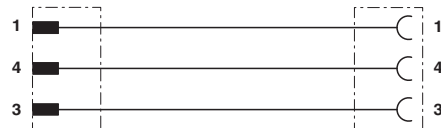

Contact assignment of the M12 plug and the M12 socket