

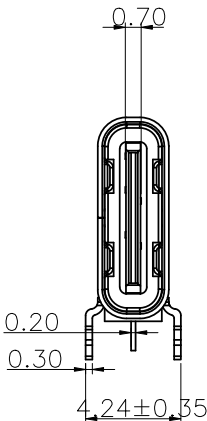
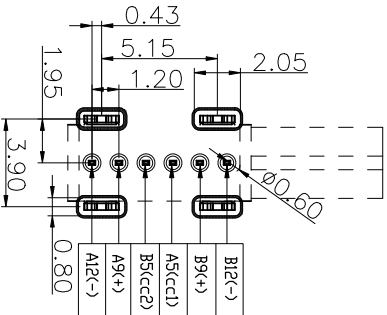




RoHS

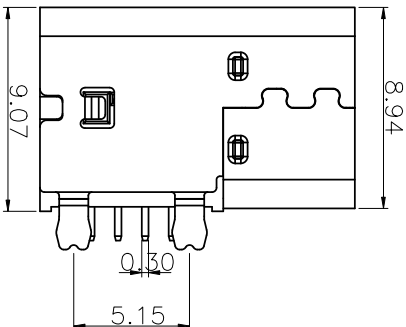

TYPE C USB技术要求:

1. 电气性能
 - 1.1. 额定电流 2.5A
 - 1.2. 额定电压: 5V.
 - 1.2. 耐电压: 500 V(AC) for 1 min.
 - 1.3. 接触阻抗: 40mΩ Max.
 - 可靠性 and 环境测试后阻抗变化不得超过10mΩ.
- 1.4. 绝缘阻抗: 100 MΩMin.
2. 机械性能
 - 2.1 插入力: 5-20N. 拔出力: 6-20N.
 - 2.2 寿命测试 5000 Max.
 - 2.3 推力: 50N min.
 - 2.4 剥离强度: 150N min.
 - 2.5 扭曲强度: 0.75Nm
3. 材料要求
 - 4.1 胶芯材料: LCP
 - 4.2 外壳材料: SPCC
 - 4.3 端子材料: C2680
 - 4.3 卡钩材料:
 4. 盐雾要求: 24H
 5. 工作温度: -20° C~85° C

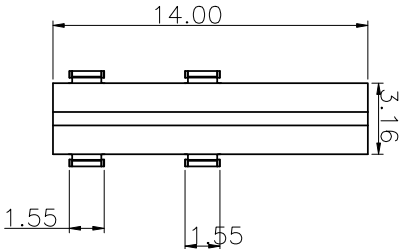

产品图

PRODUCT CHART DWG

深圳市精拓金电子有限公司
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

公差一览表		单位		制图		制料号	
TOLERANCE UNLESS OTHERWISE		UNITS		DRAWING		PRODUCT PART NO.	
B12	GND	X	±0.35	X	±5.°	918-518K2028D50001	
B9	VBUS	X	±0.25	X	±2.°		
A5	CC1	X	±0.20	X	±1.°		
B5	CC2	X	±0.05	X	±0.5°		
A9	VBUS	X	±0.05	X	±0.5°		
A12	GND	X	±0.05	X	±0.5°	918-518K2028D50001	
PIN	SIGNAL NAME	X	±0.05	X	±0.5°		
		X	±0.05	X	±0.5°		
		X	±0.05	X	±0.5°		
		X	±0.05	X	±0.5°		

MAPX MODIFICATION

DRW DATE