


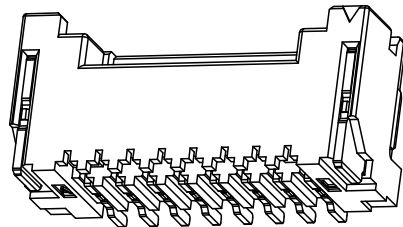
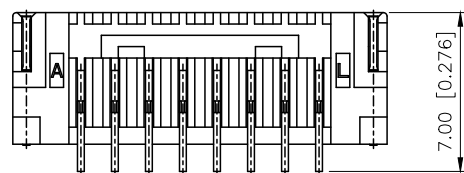



MYRA

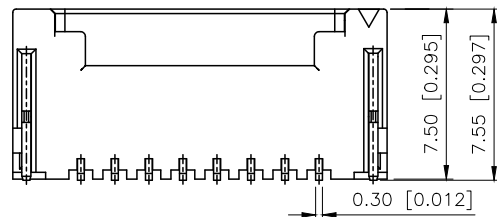


With MYRA VIEW  
SCALE:1/2

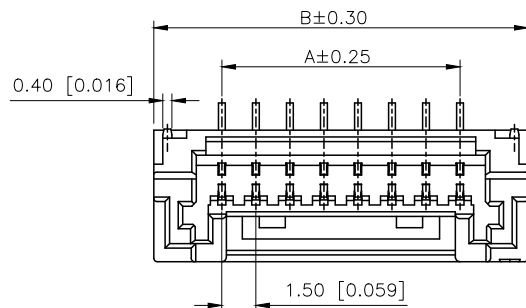


2P




3P-5P

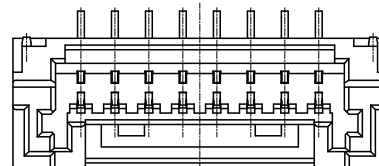



6P-9P

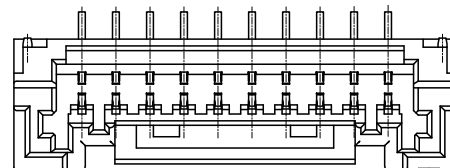

10P-11P

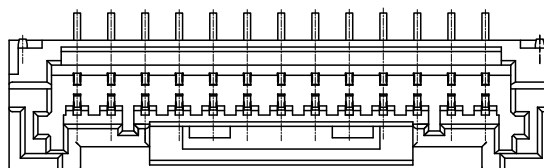

12P-16P

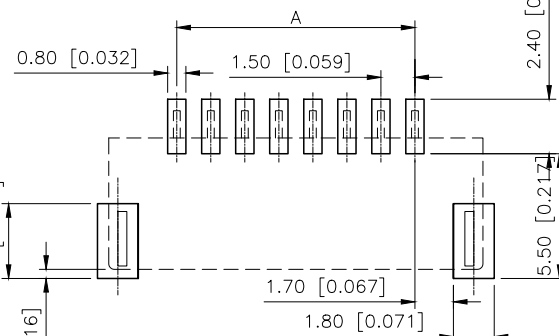

PCB LAYOUT(Tolerance:±0.05)

|                        |       |
|------------------------|-------|
| AuGLAR                 | ±5°   |
| X.                     | ±0.40 |
| X.x                    | ±0.30 |
| X.xx                   | ±0.20 |
| X.xxx                  | ±0.15 |
| UNSPECIFIED TOLERANCES |       |



|          |    |
|----------|----|
| DESIGN   | 阿树 |
| CHECKED  |    |
| APPROVED |    |

REVISIONS

| REV. | ECN NO. | LOCATION | DESCRIPTION     | DATE       | DESIGN |
|------|---------|----------|-----------------|------------|--------|
| A0   | N/A     |          | INITIAL RELEASE | /          | /      |
| A1   | N/A     |          | 图面升级整理图面        | 2024.12.18 | 阿树     |

Specifications:

规格:

Voltage rating:100V AC/DC  
额定电压: 100V AC/DC  
Current rating:2A AC/DC  
额定电流: 2A AC/DC  
Withstanding voltage:500V AC/minute  
耐电压: 500V AC/分钟  
Temperature range:-40℃-+125℃  
温度范围: -40℃-+125℃  
Insulation resistance:≥500MΩ  
绝缘电阻: ≥500MΩ  
Contact resistance:≤20mΩ  
接触电阻: ≤20mΩ

PART NO.:

X1507 W V S-XX-9T SN  
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
- ②Category:W-Wafer
- ③Welding Board Angle:V-Stright 180°
- ④Welding way :S-SMT
- ⑤Row No.-Pin No.:XX-02P~16P
- ⑥Material:9T-PA9T 94V-0
- ⑦Plating Category:Sn-Bright Tin Plating

| Poles | Dimensions (mm) |       | Poles | Dimensions (mm) |       |
|-------|-----------------|-------|-------|-----------------|-------|
|       | A               | B     |       | A               | B     |
| 02    | 1.50            | 7.50  | 10    | 13.50           | 19.50 |
| 03    | 3.00            | 9.00  | 11    | 15.00           | 21.00 |
| 04    | 4.50            | 10.50 | 12    | 16.50           | 22.50 |
| 05    | 6.00            | 12.00 | 13    | 18.00           | 24.00 |
| 06    | 7.50            | 13.50 | 14    | 19.50           | 25.50 |
| 07    | 9.00            | 15.00 | 15    | 21.00           | 27.00 |
| 08    | 10.50           | 16.50 | 16    | 22.50           | 28.50 |
| 09    | 12.00           | 18.00 |       |                 |       |

|                  |               |                 |             |                       |
|------------------|---------------|-----------------|-------------|-----------------------|
| X1507WVS-XX-9TSN | PA9T UL 94V-0 | Phosphor Bronze | SN-Plated   | X1507H                |
| PART NO          | Material      | Material        | Finish(Pin) | Suitable XKB Terminal |

|             |                                         |
|-------------|-----------------------------------------|
| VIEW:       | MODEL TYPE: 1.5mm Crimp Style Connector |
| UNIT: mm/in | PART NO.: X1507WVS-XX-9TSN              |
| SIZE: A4    | DWG NO.:                                |