

Pitch:2.54x2.54mm(0.1 " x0.1 ")
Female Header Dual Rows Dip Type

ELETE
—Professional Connecting Solution—
HFNDS68 Series


Specifications

Current Rating:3.0 Ampere
Insulation Resistance:1000MΩ Min
Dielectric Withstanding:600V AC
Contact Resistance:20mΩ Max
Operating Temperature:-40℃ to +105℃

Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester,UL 94V-0
LCP/NL6T

All material RoHS&Reach Compliant
Halogen-free is available

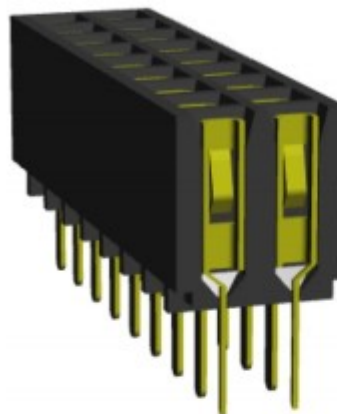

Mating with



HMNDSH25



HMNDS25



HMNDS43



HMNDS74



HMNDM43



HMNDM25







HMNDP61/HMNDP50



HMNDR43



HMNDR25

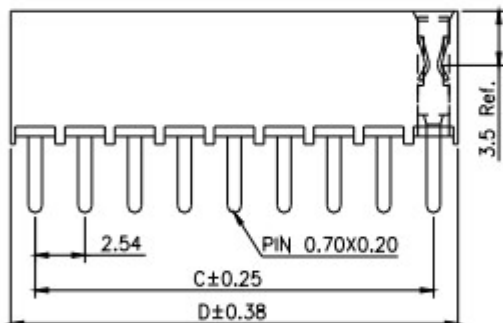

PS:Suggested Mating Pin Length:5.0~6.5mm

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
02	2.54	5.08	11	25.40	27.94	20	48.26	50.80	29	71.12	73.66
03	5.08	7.62	12	27.94	30.48	21	50.80	53.34	30	73.66	76.20
04	7.62	10.16	13	30.48	33.02	22	53.34	55.88			
05	10.16	12.70	14	33.02	35.56	23	55.88	58.42			
06	12.70	15.24	15	35.56	38.10	24	58.42	60.96			
07	15.24	17.78	16	38.10	40.64	25	60.96	63.50			
08	17.78	20.32	17	40.64	43.18	26	63.50	66.04			
09	20.32	22.86	18	43.18	45.72	27	66.04	68.58			
10	22.86	25.40	19	45.72	48.26	28	68.58	71.12			