




AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERAuCES	



3.1: CURRENT RATING:0.5A/PIN
3.2: VOLTAGE RATING:50V (AC/DC)
3.3:CONTACT RESISTANCE:INITIAL VALUE 30mOHM MAX.
3.4:INSULATOR RESISTANCE:500MOHM in.
3.5:DIELECTRIC WITHSTANDING VOLTAGE:250V AC FOR 1MINUTE
3.6: DURABILITY: 20 TIMES Min.
3.7:OPERATING TEMPERATURE:-40℃+85℃
OPERATING HUMIDITY RANGE: 20% TO 85%

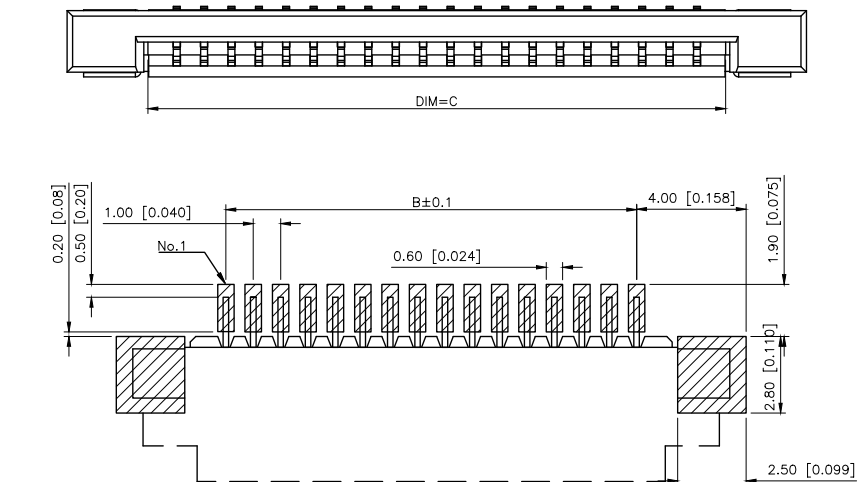

Reinforcing Layer

RECOMMENDED	FFC	DIM
-------------	-----	-----

3.00 [0.118]MIN