

**DESCRIPTION**

- High Collector-Emitter Sustaining Voltage-  
:  $V_{CEO(SUS)} = 400V$  (Min)
- High Switching Speed

**APPLICATIONS**



- Power switching
- Power amplification
- Power driver

**ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ C$ )**

| SYMBOL    | PARAMETER   | MAX     | UNIT       |
|-----------|---|---------|------------|
| $V_{CBO}$ | Collector-Base Voltage                            | 450     | V          |
| $V_{CEO}$ | Collector-Emitter Voltage                         | 400     | V          |
| $V_{EBO}$ | Emitter-Base Voltage                              | 5       | V          |
| $I_C$     | Collector Current-Continuous                      | 15      | A          |
| $I_{CM}$  | Collector Current-Peak                            | 30      | A          |
| $I_B$     | Base Current-Continuous                           | 6       | A          |
| $P_C$     | Collector Power Dissipation<br>@ $T_C=25^\circ C$ | 100     | W          |
| $T_j$     | Junction Temperature                              | 200     | $^\circ C$ |
| $T_{stg}$ | Storage Temperature Range                         | -65~200 | $^\circ C$ |

**THERMAL CHARACTERISTICS**

| SYMBOL       | PARAMETER                            | MAX | UNIT         |
|--------------|--------------------------------------|-----|--------------|
| $R_{th j-c}$ | Thermal Resistance, Junction to Case | 1.0 | $^\circ C/W$ |

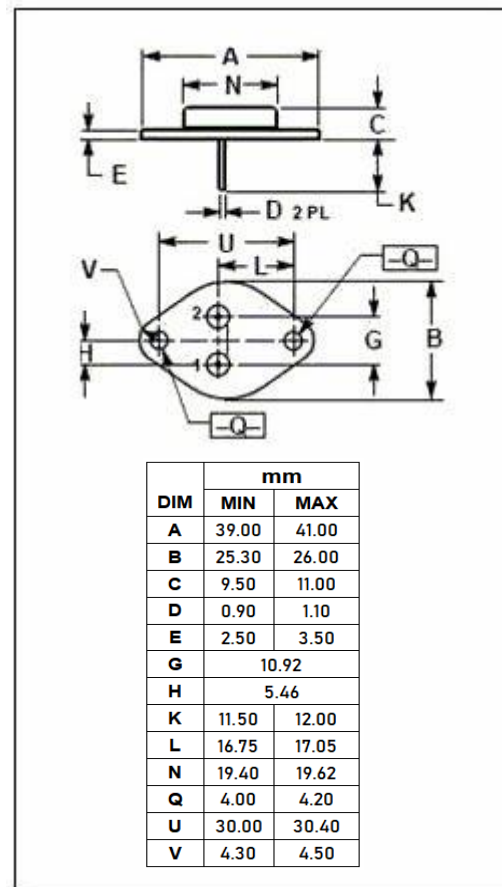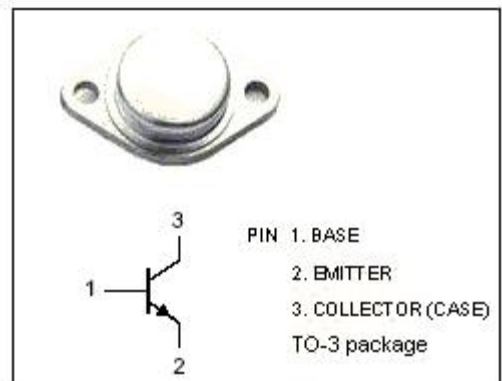

**ELECTRICAL CHARACTERISTICS**

$T_c=25^{\circ}\text{C}$  unless otherwise specified

| SYMBOL        | PARAMETER                            | CONDITIONS   | MIN | TYP. | MAX        | UNIT |
|---------------|--------------------------------------|--|-----|------|------------|------|
| $V_{CE(SUS)}$ | Collector-Emitter Sustaining Voltage | $I_C= 50\text{mA}; L= 25\text{mH}$                         | 400 |      |            | V    |
| $V_{CE(sat)}$ | Collector-Emitter Saturation Voltage | $I_C= 6\text{A}; I_B= 1.2\text{A}$                         |     |      | 1.2        | V    |
| $V_{BE(sat)}$ | Base-Emitter Saturation Voltage      | $I_C= 6\text{A}; I_B= 1.2\text{A}$                         |     |      | 1.5        | V    |
| $h_{FE}$      | DC Current Gain                      | $I_C= 5\text{A}; V_{CE}= 2\text{V}$                        | 12  |      | 60         |      |
| $h_{FE}$      | DC Current Gain                      | $I_C= 10\text{A}; V_{CE}= 2\text{V}$                       | 6   |      | 30         |      |
| $I_{CBO}$     | Collector Cutoff Current             | $V_{CB}= 450\text{V}; I_E= 0$<br>$T_c=125^{\circ}\text{C}$ |     |      | 1.0<br>4.0 | mA   |
| $I_{CEO}$     | Collector Cutoff Current             | $V_{CE}= 400\text{V}; I_B= 0$                              |     |      | 5.0        | mA   |
| $I_{EBO}$     | Emitter Cutoff Current               | $V_{EB}= 5\text{V}; I_C= 0$                                |     |      | 1.0        | mA   |

Switching Times

|           |              |   |  |  |     |               |
|-----------|--------------|---|--|--|-----|---------------|
| $t_r$     | Rise Time    | $I_C= 6\text{A}; I_{B1}= I_{B2}= 1.2\text{A}$ |  |  | 1.0 | $\mu\text{s}$ |
| $t_{stg}$ | Storage Time |   |  |  | 2.0 | $\mu\text{s}$ |
| $t_f$     | Fall Time    |   |  |  | 1.0 | $\mu\text{s}$ |