

标 记
MARKECN编号/变更内容
ECN NO/DEFINITION修 改
REVISE日 期
DATE核 准
APPROVE

A

B

C

D

E

F

G

A

B






C

D

E

F

G

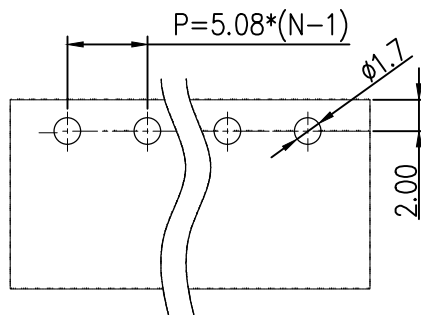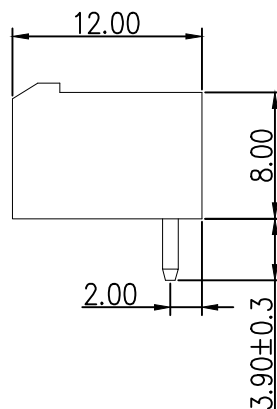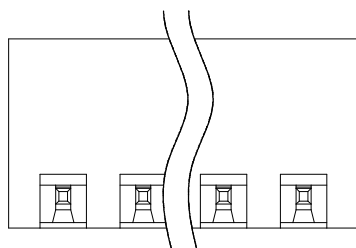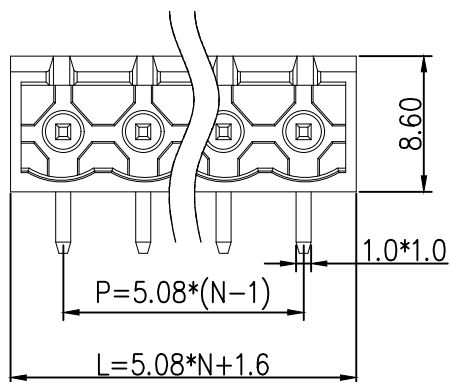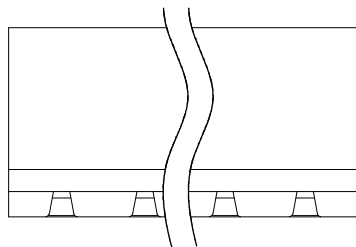

PCB LAYOUT

Materials and Electroplating

①. Plastic body: PA66

②. Solder pin: copper, nickel tin plated

Electrical performance

Rated voltage: 300V

Rated current: 15A

Contact resistance: 20m Ω (Max)

Insulation resistance: 500M Ω \ DC500V


Voltage endurance: AC1500V \ 1Min

mechanical properties

Temperature range: -40 °C~+105 °C

Instantaneous temperature: +250 °C, 5 seconds

2	插针	铜	镀镍锡	
1	基座	PA66	绿色	
序号	品名	材质	电镀/颜色	备注

	品名 TITLE		接线端子	
	料号 PART NO		HC-JXDZRC-5.08-8P	
GENERAL TOLERANCES (UNLESS SPECIFIED)		比列 SCALE	1:1	
单位 UNIT		MM	制图 DRAW	AhYe
张数 PART NO		1 OF 1	审核 CHECKED	夏操云
版本 REV		A	批准 APPROVE	赵亮亮

公差参数	公差
2-6P	±0.10 ±0.20
7-12P	±0.20 ±0.30
13-18P	±0.25 ±0.40
19-24P	±0.30 ±0.50

X.xxx	±0.15
X.xx	±0.25
X.x	±0.35

