

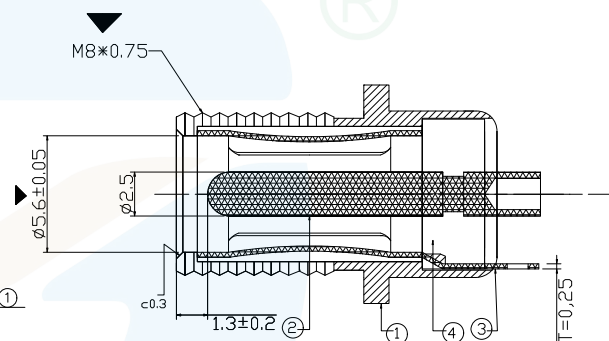

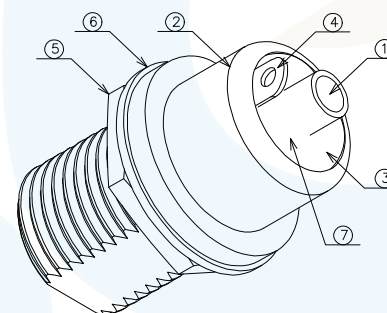
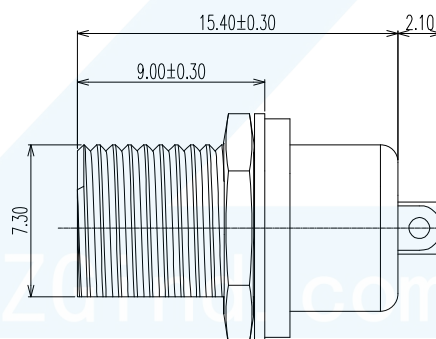
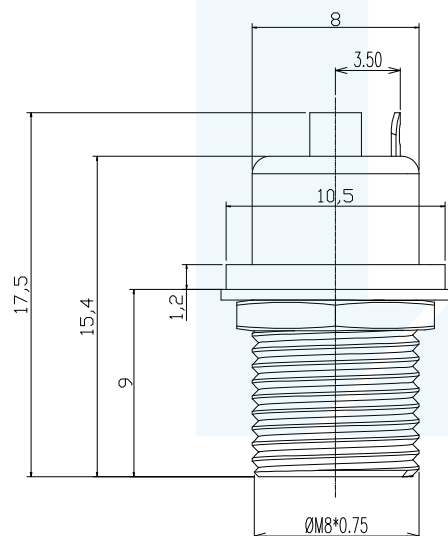
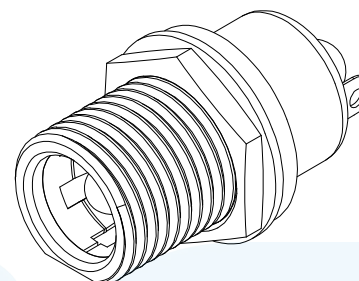


ZONE	ECN.NO.	DESCRIPTION	DRAWING	DATE
A		INITIAL	林生财	2023.06.19



NOTES

1. CURRENT RATING: 24V & 8A MAX.
2. CONTACT RESISTANCE: 50mΩ MAX.
3. INSULATION RESISTANCE: 100MΩ MIN.
4. DIELECTRIC WITHSTANDING: 500V AC MIN.
5. DURABILITY: 5000 CYCLES MIN.
6. CONNECTOR MATING FORCES: 3N MIN.
7. CONNECTOR UNMATING FORCES: 35N MAX.
8. OPERATING TEMPERATURE: -25°C TO +85°C.
9. WATERPROOF LEVEL: IP67.

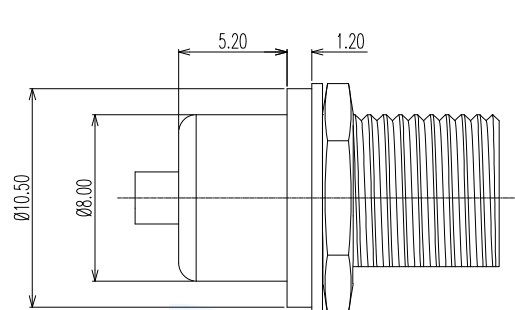

⑦	胶水	1	黑色
⑥	垫片	1	硅胶
⑤	螺帽	1	C3604, 镀镍
④	弹片	1	C5191, 镀镍
③	绝缘塑胶	1	PBT, 黑色
②	铜套	1	C3604, 镀镍
①	PIN针	1	C3604, 镀镍
序号	品名	数量	材质、颜色、电镀





LZG INDUSTRIAL CO. LTD

DRAWING:	林生财	DATE:	2023.06.19	SCALE	1:1
CHECK:	李宏鑫	DATE:	2023.06.19	MATERIAL	*
APPROVAL:	杨进宝	DATE:	2023.06.19	Web.	LZGind.com
DRAWING NO.	ZB30029-02DBAP-A			SHEET	1/1

PART NAME	DC Power Jack	TOLERANCE UNLESS	0.0±0.3	0.1±2°	UNIT: mm	
PART NO.	ZB30029-02DBAP-A	OTHERWISE SPECIFIED:	0.00±0.2 0.00±0.1	0.0°±1° 0.00°±0.5°		

RoHS
Compliant

ZONE	ECN.NO.	DESCRIPTION	DRAWING	DATE
A		INITIAL	林生财	2023.06.19

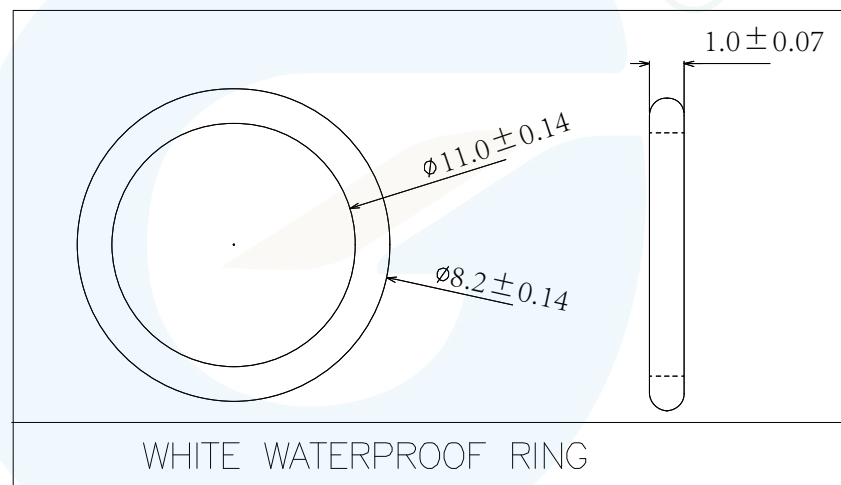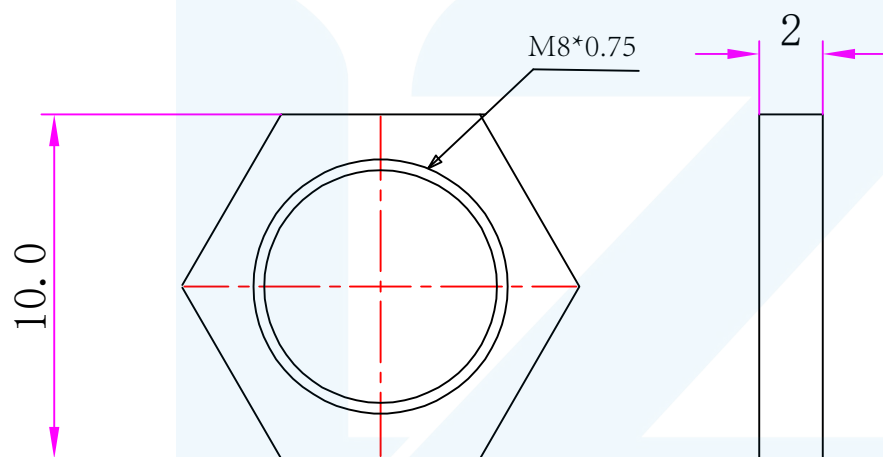

LZG INDUSTRIAL CO. LTD

DRAWING:	林生财	DATE:	2023.06.19	SCALE	1:1
CHECK:	李宏鑫	DATE:	2023.06.19	MATERIAL	*
APPROVAL:	杨进宝	DATE:	2023.06.19	DWG. NO.	
DRAWING NO.	ZB30029-02DBAP-A			SHEET	1/1

PART NAME	DC Power Jack	TOLERANCE UNLESS OTHERWISE SPECIFIED:	0.0±0.3 0.00±0.2 0.000±0.1	0.1°±2° 0.0°±1° 0.00°±0.5°	UNIT: mm	
PART NO.	ZB30029-02DBAP-A					