

15 1532 06

Jack connectors




Jack plug acc. to JIS C 6560 JC35P2, 3.5 mm, 2 poles/mono, straight version, cone headed, with bend protection and solder terminals

State: Active

15

1532 06

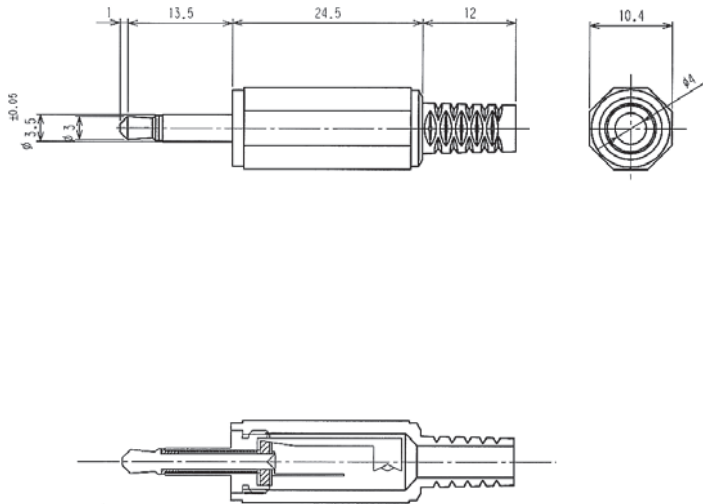

Environmental conditions

Temperature range -20 °C/+70 °C

Materials

Insulating body PF
Contact CuZn/steel, nickel-plated
Insulation hard rubber/PVC
Housing PE

Mechanical data

Mating cycles ≥ 5000

Connectable conductors for solder area

Cable diameter 4 mm

Electrical data (at T_{amb} 20 °C)

Contact resistance $\leq 50 \text{ m}\Omega$
Rated current 1 A
Rated voltage 34 V AC/DC
Rated impulse voltage 500 V/60 s
Insulation resistance $\geq 100 \text{ M}\Omega$

Associated products

Counterparts
 ☞ 1502 03 ☞ 1503 06 ☞ 1503 12
 ☞ 1522 02 ☞ 1522 03 ☞ KLK 22

15

1532 06

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
1532 06	2	100	500

Packaging:

in bulk, in a cardboard box or a plastic bag