
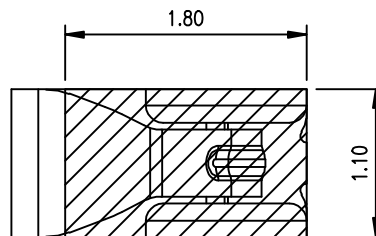


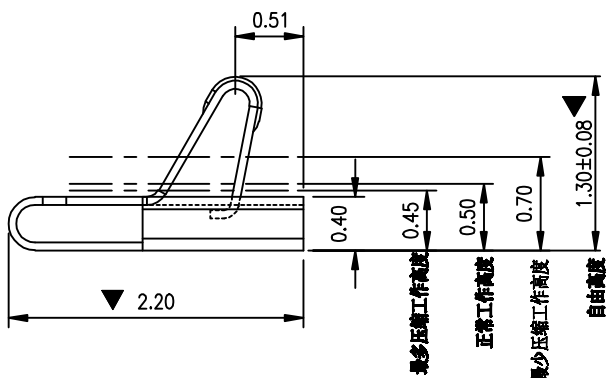



Kinghelm®

Ø0.70 吸取位置

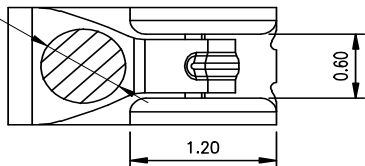

焊盘尺寸

尺寸公差 ±0.05



技术要求:

1. 材质: 不锈钢 SUS301, $T=0.06\pm0.005$;
2. 端子锡脚焊接面和接触面不可有毛边, 其他部位毛边最大 0.03mm;
3. 扭曲: $45^\circ/1000\text{mm}$, 拱形 $5\text{mm}/1000\text{mm}$;
4. 标示有“▼”符号的为重点控制和检验尺寸;
5. 未标注之 R MAX R0.13;
6. 电镀须满足 48 小时盐雾测试;
7. 寿命测试 > 2 万次, 产品弹力要求在 60gf~80gf 之间
8. 镍底 50~80u"min, 焊接区域镀金, 接触区域镀金 1U"MIN

深圳市金航标电子有限公司

www.kinghelm.com.cn

型号: KH-221112-TP

0755-28190160

GENERAL TOLERANCE

XX. ±0.50

X. ±0.35

.X ±0.25

.XX ±0.15

X° ±2.0°

.X° ±1.0°

.XX° ±0.5°

SCALE:

1:1

UNIT:

mm

SIZE:

A4



DRAWN

CHECK

APPROVE

DATE

DATE

DATE

DWG. NO.

PARTS NO.(INTENDED USE)

TP-047

TITLE

客户图

RF Antenna Spring, SMT,
L2.2*W1.1*H1.30mm

REV.

B

SHEET

1/1