
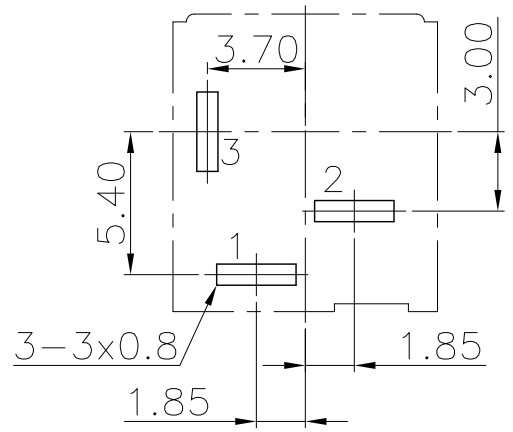
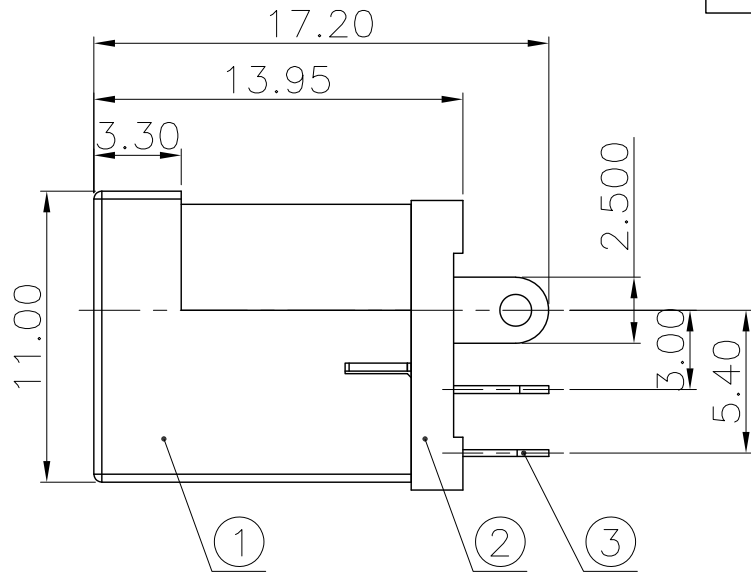



RoHS
REACH
HF

REV	MARK	ECN NO.	DESCRIPTION	NAME	DATE

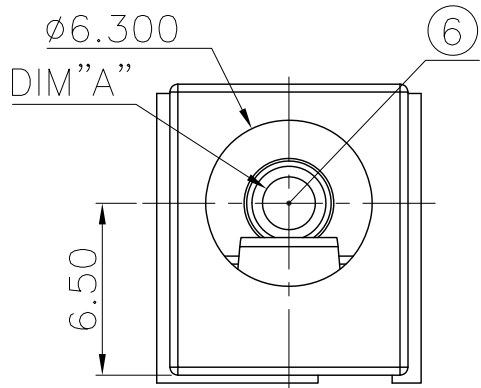

PCB HOLES(TOP VIEW)
GENERAL TOLERANCE:±0.05mm

- NOTES:
- 1.ELECTRICAL CHARACTERS:
- 1-1.RATING: DC 30V 0.5A;
 - 1-2.CONTATCT RESISTANCE:≤30mΩ;
 - 1-3.INSULATION RESISTANCE:≥100MΩ DC 500V;
 - 1-4.WITHSTANDING VOLTAGE:AC 500V 1min;
 - 1-5.LIFE:5,000 CYCLES;
- 2.MECHANICAL CHARACTERISTICS:
- 2-1.INSERTION&EXTRACTION FORCE:3~30N;
 - 2-2.OPERATING TEMPERATURE:−30°C~+70°C;



⑥	PIN		1	BRASS	CuSn PLATED
⑤	TERMINAL	3	1	BRASS t=0.3	CuSn PLATED
④	BREAK TERMINAL	2	1	BRASS t=0.3	CuSn PLATED
③	TIP SPRING	1	1	BRONZE t=0.25	SnSb PLATED
②	COVER		1	PBT	BLACK
①	HOUSING		1	PBT	BLACK
No.	PART NAME	TER'NO.	Q'TY	MATERIAL	REMARK

TOLERANCE UNLESS OTHERWISE SPEC		SHENZHEN FUGANG TECHNOLOGY CO.,LTD			
BASIC DIMENSION	TOLERANCE	DSND		TITLE:DC POWER JACK	
	x.x	CHKD		PART NO:FG-DC-012A-2.0	
	x.xx	APVD		DRAWING NO:	
	x.xxx				
ANGLES	±3°	UNIT:mm		SCALE:3.5:1	SIZE:A4
				SHEET:1/1	

XXX	2.0	2.5
DIM"A"	ø2.0 ⁺⁰ _{-0.05}	ø2.5 ⁺⁰ _{-0.05}