

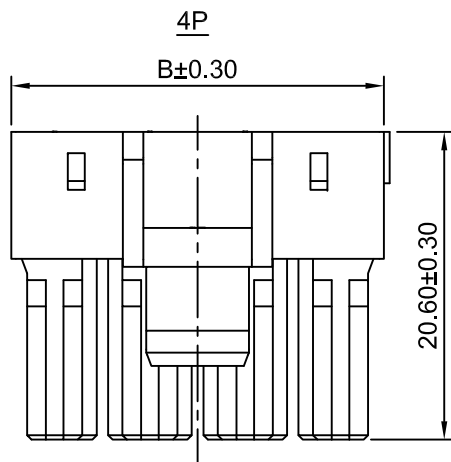
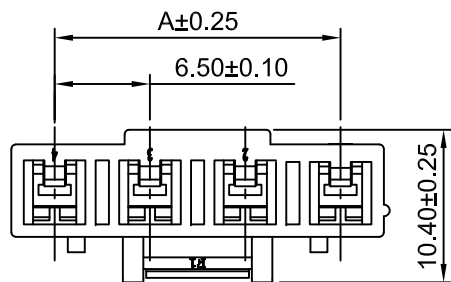
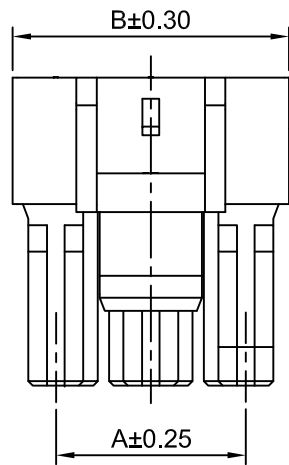
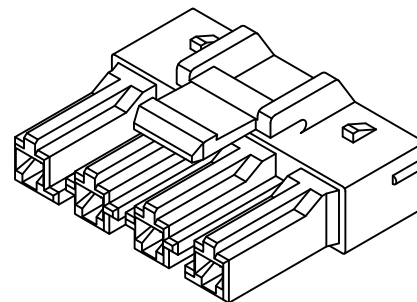


2P

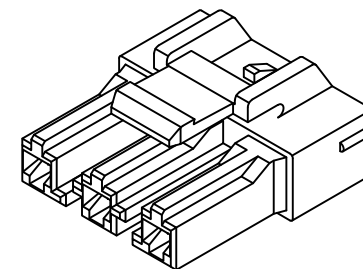

3P



SPECIFICATIONS:

Current Rating: 15A AC, DC
Voltage Rating: 300V AC, DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66, UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)	
	A	B
C6201HFC-2P	6.50	12.40
C6201HFC-3P	13.00	18.90
C6201HFC-4P	19.50	25.40

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE 6.50mm PITCH HOUSING	
mm	2:1	1 of 1		
DRWN	CHK'D	APPR		
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances	THIRD ANGLE PROJECTION		DRAWING NO. C6201HFC-XP	
x,x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°				
			REV A0	

A0	NEW RELEASE	2021.10.28
REV	DESCRIPTION	DATE