

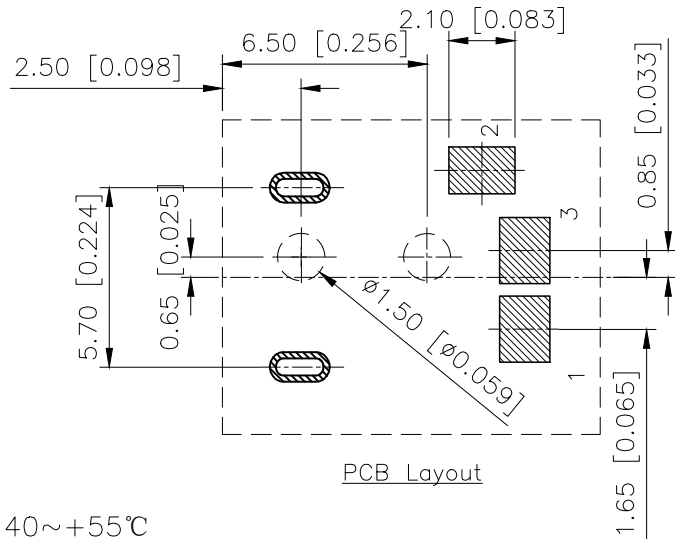
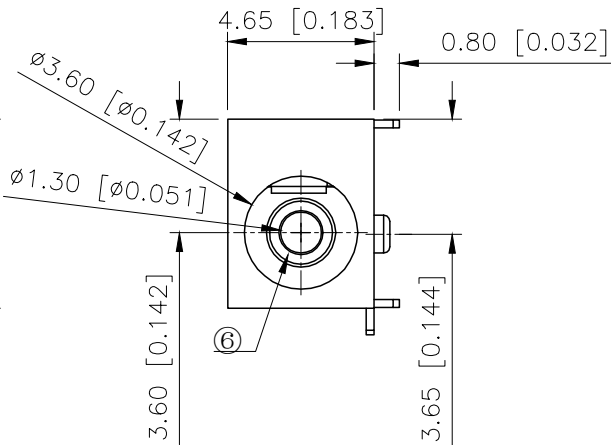
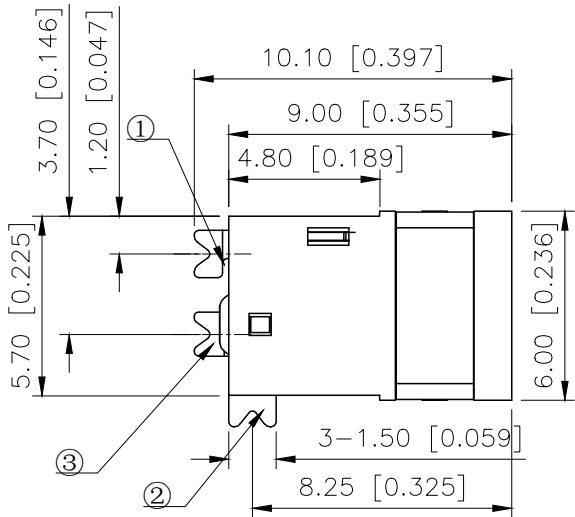


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		产品尺寸及材质变更，图面升级整理图面	2024.11.12	阿树

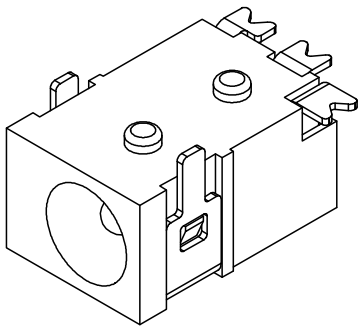

SPECIFICATIONS:
Temperature range: -40~+55°C
RATING: DC 30V 0.5A
Contact resistance: ≤30mΩ
Insulation resistance: ≥100MΩ DC250V
Withstanding voltage: AC 500V
Plugging force: 3~20N
Life Test: 5000次

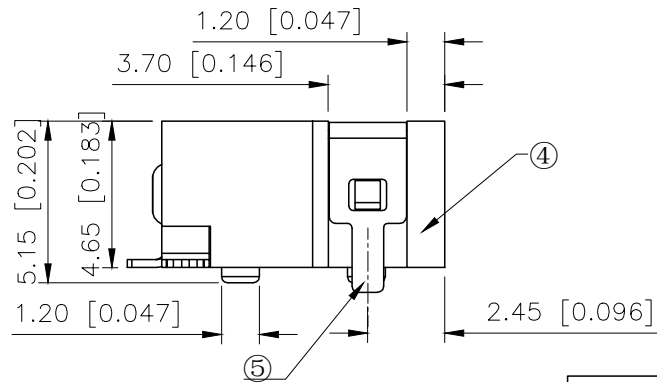

SCHEMATIC	
Model	DC-045A
Center pin	ø1.0mm ø1.3mm

6	PIN	1	H62 Brass(ROHS)	Sn-Plating(ROHS)
5	Housing	1	PPA(ROHS)	
4	Fixed Foot	1	H62 Brass(ROHS)	Ag-Plating(ROHS)
3	Flat Piece	1	H62 Brass(ROHS)	Ag-Plating(ROHS)
2	Curve Piece	1	H62 Brass(ROHS)	Ag-Plating(ROHS)
1	Spring Piece	1	C5191(ROHS)	Ag-Plating(ROHS)
NO	NAME	QTY	MATERIAL	PLATING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE: DC POWER JACK		
CHECKED		UNIT:	mm/in	PART NO.: DC-045A-1.3-SMT		
APPROVED		SIZE:	A4	DWG NO.: X-DC-045A-1.3-SMT		
CISION CO.,LIMITED				SCALE	PAGE	REVISION
				N/A	1/1	A1

XKB INDUSTRIAL PRECISION CO.,LIMITED