





1

2

3

4


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.12.25	阿树

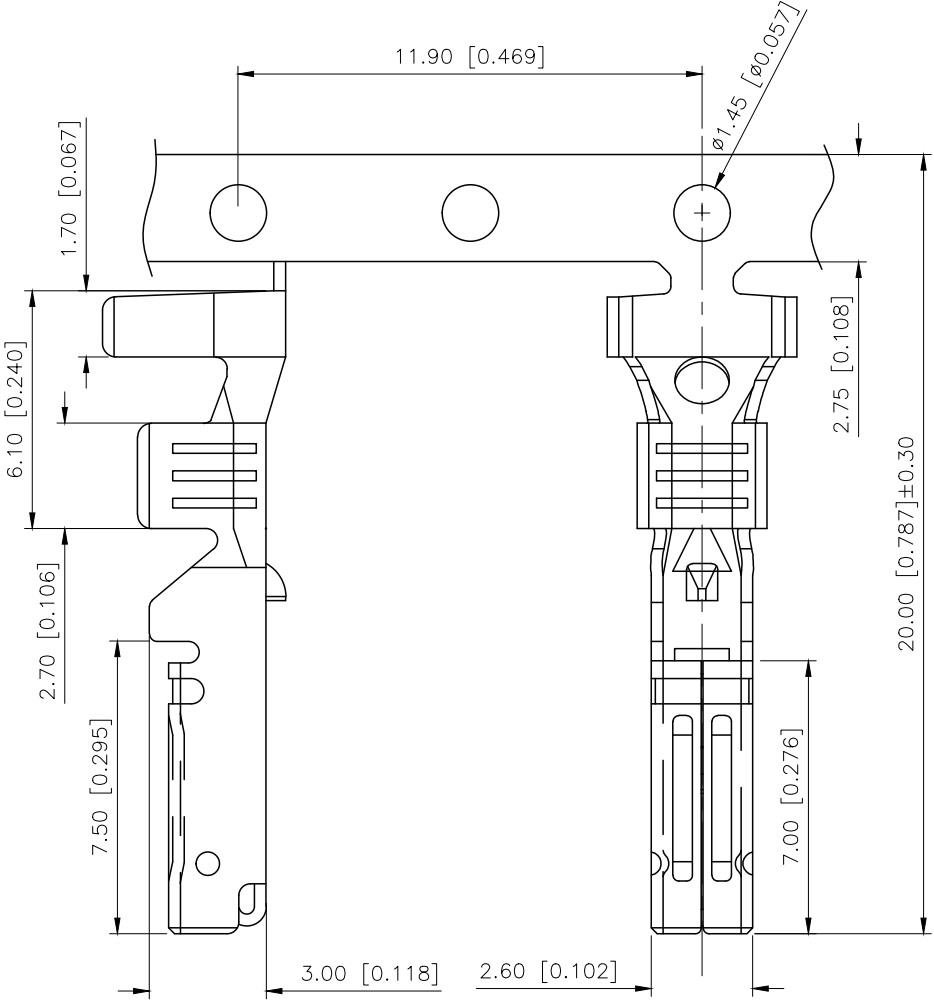

Technical Notes
1.It shows that it is smooth and clean, and there are no obvious shrinkage pits and weld marks
2.Current rating:14A AC/DC
3.Temperature range:-40℃-+125℃

PART NO.:
K 282103 I F-P SN-L
① ② ③ ④ ⑤ ⑥ ⑦
①K:XKBTEK-Car Connector
②XKB Series No
③Category:T-Terminal
④Special No:F-Female Terminal
⑤Material:P-Phosphor Bronze
⑥Plating:SN-Plated Tin
⑦Type:H-High foot; L-Middle foot
M-Low feet

K282103TF-PSN-M	AWG#22-20	2.5	2.3	0.6	4.8	4.7	1.8
K282103TF-PSN-L	AWG#18-15	3.05	3.3	1.2	4.6	4.8	1.8
K282103TF-PSN-H	AWG#15-13	3.6	3.8	1.2	4.8	4.7	1.8
PART NO	Wire Range	U	V	W	X	Y	Z
K282103TF-PSN-L	Phosphor Bronze	K282103HF		K282103D			
PART NO	Material	Suitable XKB Female		Suitable XKB Plug			



AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	6.0mm Automobile connector		
CHECKED		UNIT:	mm/in	PART NO.:	K282103TF-PSN-L		
APPROVED		SIZE:	A4	DWG NO.:	X-K282103TF-PSN-L		

1

2

3

4