



Clock Oscillator SMD-version

+3,3V

model	KXO-V96T
frequency	27,0 MHz
frequency stability at -40° ~ +85°C	± 50 ppm
operating temperature	-40° ~ +85°C
storage temperature	-50° ~ +125°C
symmetry	40% ~ 60% at 50% V _{DD} level
rise & fall time max.	5 ns (10% V _{DD} ~ 90% V _{DD} level)
"0" level max.	VOL: 10% V _{DD}
"1" level min.	VOH: 90% V _{DD}
input voltage V _{DD}	+3,3V ±5%
stand-by control voltage (pin#1)	VIH(min): 70% V _{DD} VIL(max): 30%V _{DD} *
supply voltage	-0,5V ~ +7,0V
input current	6,0 mA typ., 11,0 mA max. (pin #1=Open or VIH)
output load max.	15pF (HCMOS)
start up time max.	10 ms
disable delay time max.	150 ns
enable delay time max.	10 ms
stand by current max.*	50 µA (Pin #1=VIL)
jitter	deterministic jitter 5ps max. random jitter 7ps max. norm 1-sigma 7ps max. peak to peak 40ps max.
contents of reel	1000 pcs.
part no.	12.95066

* Internal crystal oscillation to be halted (pin#1=VIL)


Dimensions (mm):



PIN	CONNECTION
1	"L" OPEN or "H"
2	GND
3	Z OUTPUT
4	V _{DD}


Z: high impedance

Test circuit:




CL: including fixture and probe capacitance.


Suggested soldering pad:




Reflow soldering condition:

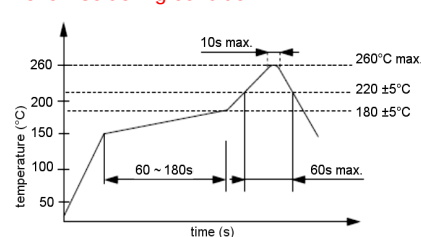

Output waveform:

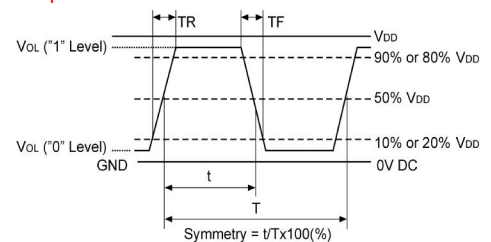

Tape specification:

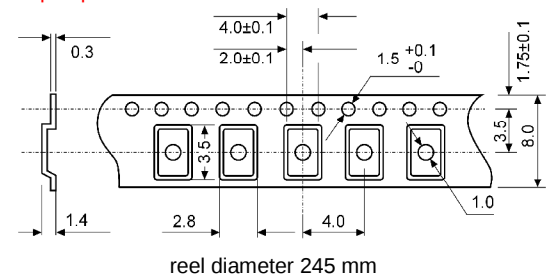

reel diameter 245 mm