


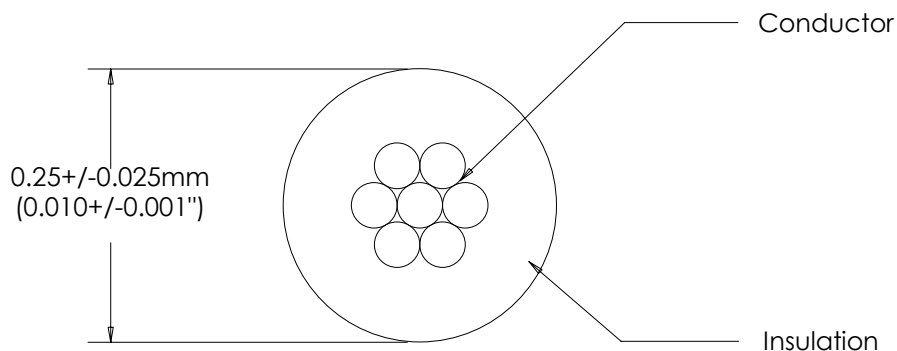

NOTES

Conductor: 36 AWG, 7/44, Silver Plated CS95 Alloy Copper

Insulation: PFA, 0.002" Wall Thickness

Color: Yellow

Insulation Shall Be Pin Hole Free

This document is the
property of TEMP-FLEX.
It may not be disclosed,
reproduced, or otherwise
used without permission.

Rev

DCR

Description

App'd

Date

11

1736

Updated TP Footage Per Spool, Min. Length. New Template, See Attachment
Updated Specification Template

KP

5/13/09

11

3070

KP

9/26/12

12

4615

Update to New SAP P/N.

KP

8/28/15

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

100060-0099