


- **Rated voltage 6.211**
- **Rated current 6.211**
- **Rated voltage AC 6.211**
- **Rated current AC 6.211**
- **Rated voltage DC 6.211**
- **Rated current DC 6.211**
- **Rated voltage DC 6.211**
- **Rated current DC 6.211**

Approvals

VDE Cert. No. 40010063, cULus E224918

Technical data	ST3F/ST4F
Rated voltage/Max. switching voltage AC	240/400 VAC
Rated current	6 A
Dielectric strength coil-contact circuit	4000 V _{rms}
Clearance / creepage coil-contact circuit	≥ 6/8 mm
Material group of insulation parts	IIIa
Insulation to IEC 60664-1	
Type of insulation coil-contact circuit	reinforced
open contact circuit	functional
Rated insulation voltage	250 V
Pollution degree	2
Rated voltage system	230/400 V
Overvoltage category	III
Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customer-support/rohssupportcenter	
Ambient temperature range	-20...+55°C
Terminals	screw / cage clamp
Terminal screw torque acc. IEC 61984	0.5 Nm
max.	0.6 Nm
Wire cross section	
single wire	0.14...2.5 mm ²
fine wire	0.14...2.5 mm ²
with bootlace crimp (DIN 46228/1)	0.14...2.5 mm ²

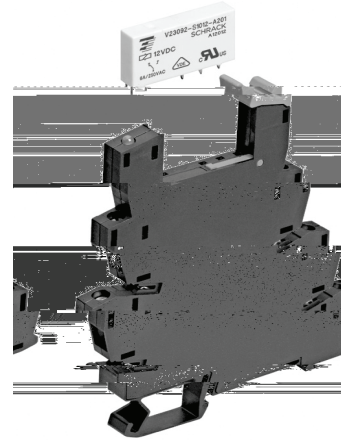

A (Continued)
