

Pitch:1.27x1.27mm(0.05 " x0.05 ") 0.40 SQ Pin
Pin Header Dual Rows Right Angle Dip Type

ELETE
—Professional Connecting Solution—
HMIDRXX Series



Specifications

Current Rating:1.0 Ampere
Insulation Resistance:1000MΩ Min
Dielectric Withstanding:300V AC
Contact Resistance:20mΩ Max
Operating Temperature:-40℃ to +105℃

Materials

Contact Material: Brass
Insulation Material: Polyester,UL 94V-0
LCP/NL6T

All material RoHS&Reach Compliant
Halogen-free is available

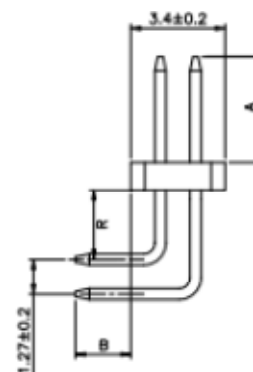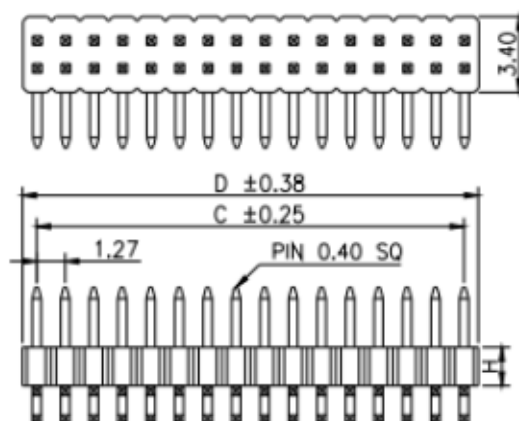

Mating with



No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
02	1.27	2.54	12	13.97	15.24	22	26.67	27.94	32	39.37	40.64
03	2.54	3.81	13	15.24	16.51	23	27.94	29.21	33	40.64	41.91
04	3.81	5.08	14	16.51	17.78	24	29.21	30.48			
05	5.08	6.35	15	17.78	19.05	25	30.48	31.75			
06	6.35	7.62	16	19.05	20.32	26	31.75	33.02			
07	7.62	8.89	17	20.32	21.59	27	33.02	34.29			
08	8.89	10.16	18	21.59	22.86	28	34.29	35.56			
09	10.16	11.43	19	22.86	24.13	29	35.56	36.83			
10	11.43	12.70	20	24.13	25.40	30	36.83	38.10			
11	12.70	13.97	21	25.40	26.67	31	38.10	39.37			