
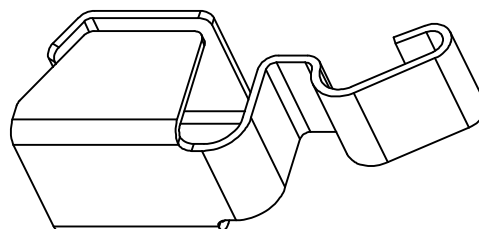

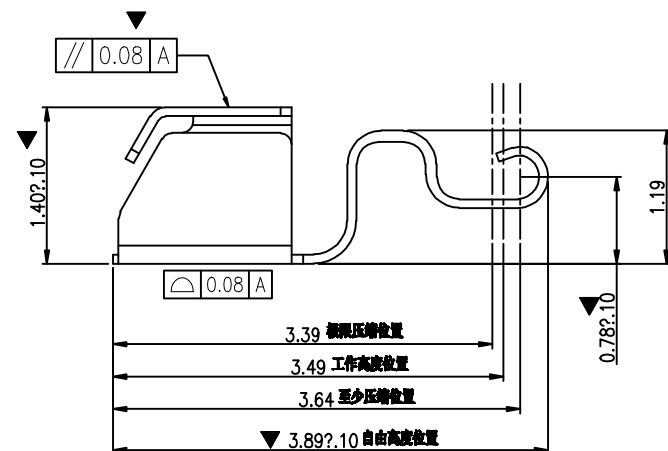



Kinghelm®

Rev.	ECN	Number	Description	Date	Drawn	Checkd	Approved

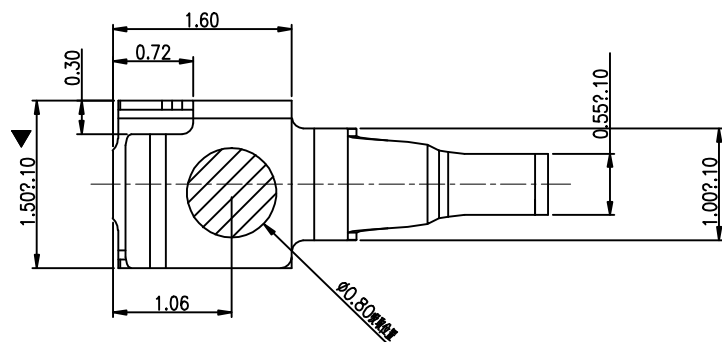

技术要求:

- 1.材质:不锈钢SUS301,T=0.08±0.005;
- 2.端子锡脚焊接面和接触面不可有毛边,其他部位毛边最大0.03mm;
- 3.扭曲:45°/1000mm,拱形 5mm/1000mm;
- 4.标示有“▼”符号的为重点控制和检验尺寸;
- 5.未标注之R MAX R0.13;
- 6.电镀须满足48小时盐雾测试;
- 7.寿命测试>2万次,产品弹力要求在60gf~80gf之间
- 8.镀底50~80u"min,焊接区域镀金,接触区域镀金1U"MIN

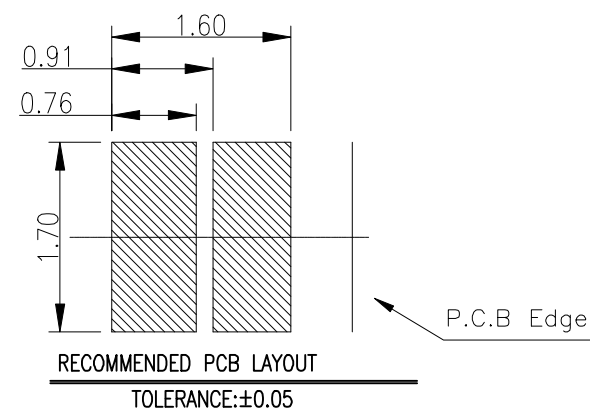

深圳市金航标电子有限公司 www.kinghelm.com.cn 型号: KH-3891514-TP-CY 0755-28190160	GENERAL TOLERANCE		SCALE: 1:1 UNIT: mm SIZE: A4	DRAWN	DATE	DWG. NO. PARTS NO.(INTENDED USE)	TITLE 客户图 RF Antenna Spring,SMT, L3.89×W1.5×H1.4侧压式弹片	REV.
	XX. ±0.50	X.° ±2.0°		CHECK	DATE			
	X. ±0.35	.X° ±1.0°		APPROVE	DATE			
	.X ±0.25	.XX° ±0.5°						
	.XX ±0.15	.XX° ±0.5°						

SHEET
1/1