
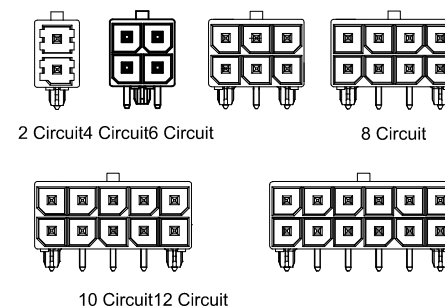




Poles	Dimensions (mm)	
	A	B
2x01	8.35	
2x02	12.05	5.70
2x03	17.75	11.40
2x04	23.45	17.10
2x05	29.15	22.80
2x06	34.85	28.50

Voltage rating: 600V AC / DC
Current rating: 16A AC / DC
Withstanding voltage: 2200V AC/minute
Temperature range: -40°C~+105°C
Insulation resistance: $\geq 1000M\Omega$
Contact resistance: $\leq 2m\Omega$
After environmental testing : $\leq 10m\Omega$
Special No.: H-High conductive Brass

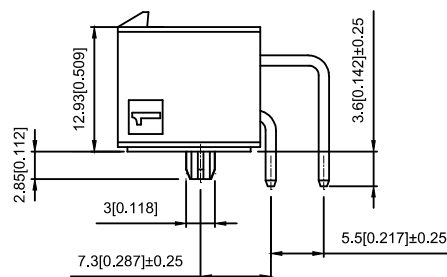

① ②③ ④ ⑤ ⑥

- ① Series No.
- ② Category : W-WAFER
- ③ Welding Board Angle : R-Straight 90°
- ④ Row No.-Pin No.: 2xXX-2x02P~2x06P
- ⑤ Material: LP -LCP 94V-0
- ⑥ Plating Category: SW-Matte Tin Plating

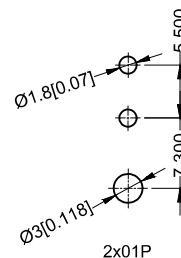

Recommended P.C.B Layout
General Tolerance ± 0.05

X5700WR-2x04-LPSW	High conductive Brass	X5700H	X5700T
PART NO	Material	Suitable XKB Housing	Suitable XKB Terminal

						DSND		DATE		SCALE: N/A	MODEL TYPE: Wire to board connector		
Δ x					units: mm	DWN		DATE		VIEW: 	PART NO.: X5700WR-2x04-LPSW		
Δ x					X.X ± 0.2 mm	CHKD		DATE		UNIT: mm/in	DWG NO.: X-X5700WR-2x04-LPSW		
Δ x					X.XX ± 0.1 mm	APPD		DATE		SIZE: A4			
MARK	DESCRIPTION		DATE	REVISED	APPROVED								
REVISIONS													
						UNSPECIFIED TOLERANCES				XKB INDUSTRIAL PRECISION CO.,LIMITED			
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn										WEIGHT *SHEET REVISION 1.0g 1/1 A0			