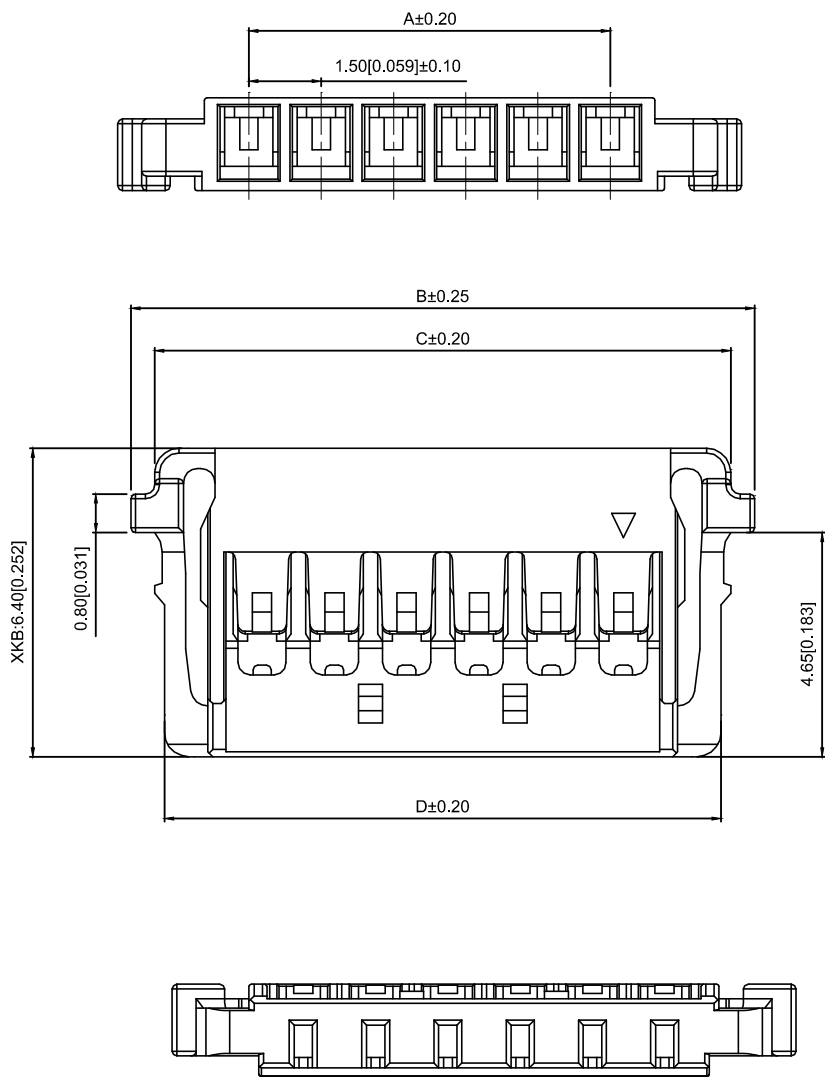


Specifications:

规格:

Voltage rating:150V AC/DC

额定电压: 150V AC/DC

Current rating:3A AC/DC

额定电流: 3A AC/DC

Withstanding voltage:500V AC/minute

耐受电压: 500V AC/分钟

Temperature range:-25℃~+85℃

温度范围: -25℃~+85℃

Insulation resistance:≥1000MΩ

绝缘电阻: ≥1000MΩ

Contact resistance:≤20mΩ

接触电阻: ≤20mΩ

After environmental testing:≤40mΩ

环境测试后: ≤40兆欧

X1503 H-10-N0

① ② ③ ④

- 1.Series No.
- 2.Category:H-HSG
- 3.Row No-Pin No: XX-04P~12P
- 4.Material :N0-PA66 94V-0

| Poles | Dimensions(mm) |       |       |       |
|-------|----------------|-------|-------|-------|
|       | A              | B     | C     | D     |
| 02    |                | 6.95  | 5.95  | 5.55  |
| 03    | 3.00           | 8.45  | 7.45  | 7.05  |
| 04    | 4.50           | 9.95  | 8.95  | 8.55  |
| 05    | 6.00           | 11.45 | 10.45 | 10.05 |
| 06    | 7.50           | 12.95 | 11.95 | 11.55 |
| 07    | 9.00           | 14.45 | 13.45 | 13.05 |
| 08    | 10.50          | 15.95 | 14.95 | 14.55 |
| 09    | 12.00          | 17.45 | 16.45 | 16.05 |
| 10    | 13.50          | 18.95 | 17.95 | 17.55 |
| 11    | 15.00          | 20.45 | 19.45 | 19.05 |
| 12    | 16.50          | 21.95 | 20.95 | 20.55 |

|              |               |                   |              |
|--------------|---------------|-------------------|--------------|
| X1503H-10-N0 | PA66 UL 94V-0 | X1503T            | X1503W       |
| PART NO      | Material      | Suitable Terminal | Suitable XKB |

Wire to board connector

|                                               |  |  |  |  |                       |                                      |  |      |  |             |                                              |
|-----------------------------------------------|--|--|--|--|-----------------------|--------------------------------------|--|------|--|-------------|----------------------------------------------|
|                                               |  |  |  |  |                       | DSND                                 |  | DATE |  | SCALE: N/A  | MODEL TYPE:<br>1.50mm Crimp Style Connectors |
| ΔX                                            |  |  |  |  | units: mm             | DWN                                  |  | DATE |  | VIEW:       | PART NO.:<br>X1503H-10-N0                    |
| ΔX                                            |  |  |  |  | tolerance: X.X ±0.2mm | CHKD                                 |  | DATE |  | UNIT: mm/in | DWG NO.:<br>X-X1503H-10-N0                   |
| ΔX                                            |  |  |  |  | X.XX ±0.1mm           | APPD                                 |  | DATE |  | SIZE: A4    |                                              |
| MARK                                          |  |  |  |  | X.XXX ±0.05mm         |                                      |  |      |  |             |                                              |
| REVISIONS                                     |  |  |  |  |                       | UNSPECIFIED TOLERANCES               |  |      |  |             |                                              |
| www.xk-dg.cn www.helloxkb.com www.helloxkb.cn |  |  |  |  |                       | XKB INDUSTRIAL PRECISION CO.,LIMITED |  |      |  |             | WEIGHT<br>1.0g                               |
|                                               |  |  |  |  |                       |                                      |  |      |  |             | SHEET<br>1/1                                 |
|                                               |  |  |  |  |                       |                                      |  |      |  |             | REVISION<br>A0                               |