









## Separate Construction with Cylindrical 16-dia. Body

- Miniature design of 28.5 mm, the smallest class in the industry.
- Detachable Switch.
- The same contacts can be used for both standard loads and microloads.
- Easy-to-wire terminal arrangement.
- Certified for EN 60947-5-1.



Refer to *Safety Precautions for All Pushbutton Switches/Indicators* and *Safety Precautions* on page 24.

## List of Models

|                                                    | Model                                                                                             |                                                                                                   |                                                                                                     |
|----------------------------------------------------|---------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
|                                                    | Rectangular                                                                                       | Square                                                                                            | Round                                                                                               |
| <b>Solder terminals</b>                            |  A16□-J Series  |  A16□-A Series  |  A16□-T Series  |
| <b>PCB terminals</b>                               |  A16□-J Series |  A16□-A Series |  A16□-T Series |
| <b>Voltage-reduction lighting solder terminals</b> |  A16□-J Series |  A16□-A Series |  A16□-T Series |
| <b>Screw-less clamp models</b>                     |  A16□-J Series |  A16□-A Series |  A16□-T Series |

## Button Colors

The button colors when the buttons are lit and when they are not lit are shown below. Use these colors as reference only. The actual colors may vary.

|              |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |                                                                                       |
|--------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| When not lit |  |  |  |  |  |  |  |  |
| When lit     |  |  |  |  |  |  |  | —                                                                                     |
|              | R<br>(Red)                                                                          | Y<br>(Yellow)                                                                       | PY<br>(Pure yellow)                                                                 | G<br>(Green)                                                                        | W<br>(White)                                                                        | A<br>(Blue)                                                                           | PW<br>(Pure white)                                                                    | B<br>(Black)                                                                          |

## Model Number Structure

**Model Number Legend** ..... The model numbers used to order sets of Units are illustrated below. One set comprises the Pushbutton, Lamp (lighted models only), Case, and Switch. For information on combinations, refer to Ordering Information on pages 3 to 7.

(1) (2) (3) (4) (5) (6) (7)  
**A 1 6 5 L - J R M - 24 D - 2**

### (1) Degree of Protection

| Symbol    | Protection         |
|-----------|--------------------|
| No symbol | IP40               |
| 5         | Oil-resistant IP66 |

### (2) Lighted/Non-lighted

| Symbol    | Type        |
|-----------|-------------|
| No symbol | Non-lighted |
| L         | Lighted     |

### (3) Shape of Pushbutton

| Symbol | Shape       |                  |
|--------|-------------|------------------|
| J      | Rectangular | 2-way guard      |
| A      | Square      | 2-way guard      |
| T      | Round       | Projecting model |

### (4) Color of Pushbutton

| Symbol | Color                           |
|--------|---------------------------------|
| R      | Red                             |
| Y      | Yellow                          |
| PY     | Pure yellow                     |
| G      | Green                           |
| W      | White                           |
| A      | Blue                            |
| PW     | Pure white                      |
| B      | Black (non-lighted models only) |

- Color illuminated models are also available (see page 8).
- Order the parts separately.

### (5) Switch Operation

| Symbol | Operation |
|--------|-----------|
| M      | Momentary |
| A      | Alternate |

- ▶ Momentary-operation: Self-resetting
- ▶ Alternate-operation: Self-holding

### Colored Illumination

| Unlit                        | Lit   |
|------------------------------|-------|
| White                        | Color |
| The built-in LED is colored. |       |

### (7) Contact Configuration

| Symbol | Type | Terminal         |
|--------|------|------------------|
| 1      | SPDT | Solder Terminal  |
| 2      | DPDT |                  |
| 1P     | SPDT | PCB Terminal     |
| 2P     | DPDT |                  |
| 2S     | DPDT | Screw-less Clamp |

- Only DPDT contacts are available with Screw-Less Clamp.
- Consult your OMRON representative concerning pricing and delivery timing for PCB terminals and screw-less clamp connectors.

### (6) Light Source

| Symbol    | Type              | Operating voltage | Rated voltage |
|-----------|-------------------|-------------------|---------------|
| No symbol | Non-lighted       |                   |               |
| 5         | Incandescent lamp | 5 VAC/VDC         | 6 VAC/VDC     |
| 12        |                   | 12 VAC/VDC        | 14 VAC/VDC    |
| 24        |                   | 24 VAC/VDC        | 28 VAC/VDC    |
| 5D        | LED               | 5 ± 5% VDC        | 5 VDC         |
| 12D       |                   | 12 ± 5% VAC/VDC   | 12 VAC/VDC    |
| 24D       |                   | 24 ± 5% VAC/VDC   | 24 VAC/VDC    |

### Voltage Reduction Unit (24-V Built-in LED)

| Symbol | Type | Operating voltage  | Rated voltage   |
|--------|------|--------------------|-----------------|
| T1     | LED  | 100 to 110 VAC/VDC | 100/110 VAC/VDC |
| T2     |      | 200 to 220 VAC/VDC | 200/220 VAC/VDC |

- Solder terminals are available only with 100-V models.
- The Voltage Reduction Unit is not available for models with PCB terminals.
- "T2" is available only for the Screw-less Clamp type.

## Ordering Information

**Ordering as a Set** ..... The model numbers used to order sets of Units are given in the following tables. One set comprises the Pushbutton, Lamp (lighted models only), Case, and Switch.

### Solder Terminal Models

Rectangular Models

IP40




A16□-J

| Output | Lighting                                    | Item<br>Operating<br>voltage | Momentary operation<br>(Self-resetting) | Alternate operation<br>(Self-holding) | Pushbutton color<br>symbol *1                                                           |
|--------|---------------------------------------------|------------------------------|-----------------------------------------|---------------------------------------|-----------------------------------------------------------------------------------------|
| SPDT   | LED without<br>Voltage<br>Reduction<br>Unit | 5 VDC                        | A16L-J□M-5D-1                           | A16L-J□A-5D-1                         | R: red, Y: yellow<br>PY: pure yellow<br>G: green, A: blue<br>W: white<br>PW: pure white |
|        |                                             | 12 VAC/VDC                   | A16L-J□M-12D-1                          | A16L-J□A-12D-1                        |                                                                                         |
|        |                                             | 24 VAC/VDC                   | A16L-J□M-24D-1                          | A16L-J□A-24D-1                        |                                                                                         |
|        | Incandescent<br>lamp                        | 5 VAC/VDC                    | A16L-J□M-5-1                            | A16L-J□A-5-1                          | R: red, Y: yellow<br>PY: pure yellow<br>G: green, W: white<br>A: blue<br>B: black *2    |
|        |                                             | 12 VAC/VDC                   | A16L-J□M-12-1                           | A16L-J□A-12-1                         |                                                                                         |
|        |                                             | 24 VAC/VDC                   | A16L-J□M-24-1                           | A16L-J□A-24-1                         |                                                                                         |
|        | Non-lighted                                 |                              | A16-J□M-1                               | A16-J□A-1                             |                                                                                         |
| DPDT   | LED without<br>Voltage<br>Reduction<br>Unit | 5 VDC                        | A16L-J□M-5D-2                           | A16L-J□A-5D-2                         | R: red, Y: yellow<br>PY: pure yellow<br>G: green, A: blue<br>W: white<br>PW: pure white |
|        |                                             | 12 VAC/VDC                   | A16L-J□M-12D-2                          | A16L-J□A-12D-2                        |                                                                                         |
|        |                                             | 24 VAC/VDC                   | A16L-J□M-24D-2                          | A16L-J□A-24D-2                        |                                                                                         |
|        | Incandescent<br>lamp                        | 5 VAC/VDC                    | A16L-J□M-5-2                            | A16L-J□A-5-2                          | R: red, Y: yellow<br>PY: pure yellow<br>G: green, W: white<br>A: blue<br>B: black *2    |
|        |                                             | 12 VAC/VDC                   | A16L-J□M-12-2                           | A16L-J□A-12-2                         |                                                                                         |
|        |                                             | 24 VAC/VDC                   | A16L-J□M-24-2                           | A16L-J□A-24-2                         |                                                                                         |
|        | Non-lighted                                 |                              | A16-J□M-2                               | A16-J□A-2                             |                                                                                         |

\*1. Enter the desired color symbol for the Pushbutton in the □.

\*2. Black ("B") Pushbuttons are only available for non-lighted models.



Oil-resistant IP66

| Output | Lighting                                    | Item<br>Operating<br>voltage | Momentary operation<br>(Self-resetting) | Alternate operation<br>(Self-holding) | Pushbutton color<br>symbol *1                                                           |
|--------|---------------------------------------------|------------------------------|-----------------------------------------|---------------------------------------|-----------------------------------------------------------------------------------------|
| SPDT   | LED without<br>Voltage<br>Reduction<br>Unit | 5 VDC                        | A165L-J□M-5D-1                          | A165L-J□A-5D-1                        | R: red, Y: yellow<br>PY: pure yellow<br>G: green, A: blue<br>W: white<br>PW: pure white |
|        |                                             | 12 VAC/VDC                   | A165L-J□M-12D-1                         | A165L-J□A-12D-1                       |                                                                                         |
|        |                                             | 24 VAC/VDC                   | A165L-J□M-24D-1                         | A165L-J□A-24D-1                       |                                                                                         |
|        | Incandescent<br>lamp                        | 5 VAC/VDC                    | A165L-J□M-5-1                           | A165L-J□A-5-1                         | R: red, Y: yellow<br>PY: pure yellow<br>G: green, W: white<br>A: blue<br>B: black *2    |
|        |                                             | 12 VAC/VDC                   | A165L-J□M-12-1                          | A165L-J□A-12-1                        |                                                                                         |
|        |                                             | 24 VAC/VDC                   | A165L-J□M-24-1                          | A165L-J□A-24-1                        |                                                                                         |
|        | Non-lighted                                 |                              | A165-J□M-1                              | A165-J□A-1                            |                                                                                         |
| DPDT   | LED without<br>Voltage<br>Reduction<br>Unit | 5 VDC                        | A165L-J□M-5D-2                          | A165L-J□A-5D-2                        | R: red, Y: yellow<br>PY: pure yellow<br>G: green, A: blue<br>W: white<br>PW: pure white |
|        |                                             | 12 VAC/VDC                   | A165L-J□M-12D-2                         | A165L-J□A-12D-2                       |                                                                                         |
|        |                                             | 24 VAC/VDC                   | A165L-J□M-24D-2                         | A165L-J□A-24D-2                       |                                                                                         |
|        | Incandescent<br>lamp                        | 5 VAC/VDC                    | A165L-J□M-5-2                           | A165L-J□A-5-2                         | R: red, Y: yellow<br>PY: pure yellow<br>G: green, W: white<br>A: blue<br>B: black *2    |
|        |                                             | 12 VAC/VDC                   | A165L-J□M-12-2                          | A165L-J□A-12-2                        |                                                                                         |
|        |                                             | 24 VAC/VDC                   | A165L-J□M-24-2                          | A165L-J□A-24-2                        |                                                                                         |
|        | Non-lighted                                 |                              | A165-J□M-2                              | A165-J□A-2                            |                                                                                         |

\*1. Enter the desired color symbol for the Pushbutton in the □.

\*2. Black ("B") Pushbuttons are only available for non-lighted models.

Individual models: Refer to pages 9 to 13.

(The Pushbutton, Lamp, Case, and Switch can be ordered separately.)

■ Ratings: Refer to page 16. ■ Characteristics: Refer to page 16.

■ Accessories: Refer to page 15.

## Ordering Information

**Ordering as a Set** ..... The model numbers used to order sets of Units are given in the following tables. One set comprises the Pushbutton, Lamp (lighted models only), Case, and Switch.

### Solder Terminal Models

Square Models

IP40



A16□-A

| Output | Lighting                           | Item<br>Operating voltage | Momentary operation<br>(Self-resetting) | Alternate operation<br>(Self-holding) | Pushbutton color<br>symbol *1                                                           |
|--------|------------------------------------|---------------------------|-----------------------------------------|---------------------------------------|-----------------------------------------------------------------------------------------|
| SPDT   | LED without Voltage Reduction Unit | 5 VDC                     | A16L-A□M-5D-1                           | A16L-A□A-5D-1                         | R: red, Y: yellow<br>PY: pure yellow<br>G: green, A: blue<br>W: white<br>PW: pure white |
|        |                                    | 12 VAC/VDC                | A16L-A□M-12D-1                          | A16L-A□A-12D-1                        |                                                                                         |
|        |                                    | 24 VAC/VDC                | A16L-A□M-24D-1                          | A16L-A□A-24D-1                        |                                                                                         |
|        | Incandescent lamp                  | 5 VAC/VDC                 | A16L-A□M-5-1                            | A16L-A□A-5-1                          | R: red, Y: yellow<br>PY: pure yellow<br>G: green, W: white<br>A: blue<br>B: black *2    |
|        |                                    | 12 VAC/VDC                | A16L-A□M-12-1                           | A16L-A□A-12-1                         |                                                                                         |
|        |                                    | 24 VAC/VDC                | A16L-A□M-24-1                           | A16L-A□A-24-1                         |                                                                                         |
|        | Non-lighted                        |                           | A16-A□M-1                               | A16-A□A-1                             |                                                                                         |
| DPDT   | LED without Voltage Reduction Unit | 5 VDC                     | A16L-A□M-5D-2                           | A16L-A□A-5D-2                         | R: red, Y: yellow<br>PY: pure yellow<br>G: green, A: blue<br>W: white<br>PW: pure white |
|        |                                    | 12 VAC/VDC                | A16L-A□M-12D-2                          | A16L-A□A-12D-2                        |                                                                                         |
|        |                                    | 24 VAC/VDC                | A16L-A□M-24D-2                          | A16L-A□A-24D-2                        |                                                                                         |
|        | Incandescent lamp                  | 5 VAC/VDC                 | A16L-A□M-5-2                            | A16L-A□A-5-2                          | R: red, Y: yellow<br>PY: pure yellow<br>G: green, W: white<br>A: blue<br>B: black *2    |
|        |                                    | 12 VAC/VDC                | A16L-A□M-12-2                           | A16L-A□A-12-2                         |                                                                                         |
|        |                                    | 24 VAC/VDC                | A16L-A□M-24-2                           | A16L-A□A-24-2                         |                                                                                         |
|        | Non-lighted                        |                           | A16-A□M-2                               | A16-A□A-2                             |                                                                                         |

\*1. Enter the desired color symbol for the Pushbutton in the □.

\*2. Black ("B") Pushbuttons are only available for non-lighted models.



Oil-resistant IP66

| Output | Lighting                           | Item<br>Operating voltage | Momentary operation<br>(Self-resetting) | Alternate operation<br>(Self-holding) | Pushbutton color<br>symbol *1                                                           |
|--------|------------------------------------|---------------------------|-----------------------------------------|---------------------------------------|-----------------------------------------------------------------------------------------|
| SPDT   | LED without Voltage Reduction Unit | 5 VDC                     | A165L-A□M-5D-1                          | A165L-A□A-5D-1                        | R: red, Y: yellow<br>PY: pure yellow<br>G: green, A: blue<br>W: white<br>PW: pure white |
|        |                                    | 12 VAC/VDC                | A165L-A□M-12D-1                         | A165L-A□A-12D-1                       |                                                                                         |
|        |                                    | 24 VAC/VDC                | A165L-A□M-24D-1                         | A165L-A□A-24D-1                       |                                                                                         |
|        | Incandescent lamp                  | 5 VAC/VDC                 | A165L-A□M-5-1                           | A165L-A□A-5-1                         | R: red, Y: yellow<br>PY: pure yellow<br>G: green, W: white<br>A: blue<br>B: black *2    |
|        |                                    | 12 VAC/VDC                | A165L-A□M-12-1                          | A165L-A□A-12-1                        |                                                                                         |
|        |                                    | 24 VAC/VDC                | A165L-A□M-24-1                          | A165L-A□A-24-1                        |                                                                                         |
|        | Non-lighted                        |                           | A165-A□M-1                              | A165-A□A-1                            |                                                                                         |
| DPDT   | LED without Voltage Reduction Unit | 5 VDC                     | A165L-A□M-5D-2                          | A165L-A□A-5D-2                        | R: red, Y: yellow<br>PY: pure yellow<br>G: green, A: blue<br>W: white<br>PW: pure white |
|        |                                    | 12 VAC/VDC                | A165L-A□M-12D-2                         | A165L-A□A-12D-2                       |                                                                                         |
|        |                                    | 24 VAC/VDC                | A165L-A□M-24D-2                         | A165L-A□A-24D-2                       |                                                                                         |
|        | Incandescent lamp                  | 5 VAC/VDC                 | A165L-A□M-5-2                           | A165L-A□A-5-2                         | R: red, Y: yellow<br>PY: pure yellow<br>G: green, W: white<br>A: blue<br>B: black *2    |
|        |                                    | 12 VAC/VDC                | A165L-A□M-12-2                          | A165L-A□A-12-2                        |                                                                                         |
|        |                                    | 24 VAC/VDC                | A165L-A□M-24-2                          | A165L-A□A-24-2                        |                                                                                         |
|        | Non-lighted                        |                           | A165-A□M-2                              | A165-A□A-2                            |                                                                                         |

\*1. Enter the desired color symbol for the Pushbutton in the □.

\*2. Black ("B") Pushbuttons are only available for non-lighted models.

Individual models: Refer to pages 9 to 13.  
(The Pushbutton, Lamp, Case, and Switch can be ordered separately.)

■ Ratings: Refer to page 16. ■ Characteristics: Refer to page 16.  
■ Accessories: Refer to page 15.



## Ordering Information

**Ordering as a Set** ..... The model numbers used to order sets of Units are given in the following tables. One set comprises the Pushbutton, Lamp (lighted models only), Case, and Switch.

### Solder Terminals

Round Models

IP40



A16□-T

| Output | Lighting                                    | Item<br>Operating voltage | Momentary operation<br>(Self-resetting) | Alternate operation<br>(Self-holding) | Pushbutton color<br>symbol *1                                                           |
|--------|---------------------------------------------|---------------------------|-----------------------------------------|---------------------------------------|-----------------------------------------------------------------------------------------|
| SPDT   | LED without<br>Voltage<br>Reduction<br>Unit | 5 VDC                     | A16L-T□M-5D-1                           | A16L-T□A-5D-1                         | R: red, Y: yellow<br>PY: pure yellow<br>G: green, A: blue<br>W: white<br>PW: pure white |
|        |                                             | 12 VAC/VDC                | A16L-T□M-12D-1                          | A16L-T□A-12D-1                        |                                                                                         |
|        |                                             | 24 VAC/VDC                | A16L-T□M-24D-1                          | A16L-T□A-24D-1                        |                                                                                         |
|        | Incandescent<br>lamp                        | 5 VAC/VDC                 | A16L-T□M-5-1                            | A16L-T□A-5-1                          | R: red, Y: yellow<br>PY: pure yellow<br>G: green, W: white<br>A: blue<br>B: black *2    |
|        |                                             | 12 VAC/VDC                | A16L-T□M-12-1                           | A16L-T□A-12-1                         |                                                                                         |
|        |                                             | 24 VAC/VDC                | A16L-T□M-24-1                           | A16L-T□A-24-1                         |                                                                                         |
|        | Non-lighted                                 |                           | A16-T□M-1                               | A16-T□A-1                             |                                                                                         |
| DPDT   | LED without<br>Voltage<br>Reduction<br>Unit | 5 VDC                     | A16L-T□M-5D-2                           | A16L-T□A-5D-2                         | R: red, Y: yellow<br>PY: pure yellow<br>G: green, A: blue<br>W: white<br>PW: pure white |
|        |                                             | 12 VAC/VDC                | A16L-T□M-12D-2                          | A16L-T□A-12D-2                        |                                                                                         |
|        |                                             | 24 VAC/VDC                | A16L-T□M-24D-2                          | A16L-T□A-24D-2                        |                                                                                         |
|        | Incandescent<br>lamp                        | 5 VAC/VDC                 | A16L-T□M-5-2                            | A16L-T□A-5-2                          | R: red, Y: yellow<br>PY: pure yellow<br>G: green, W: white<br>A: blue<br>B: black *2    |
|        |                                             | 12 VAC/VDC                | A16L-T□M-12-2                           | A16L-T□A-12-2                         |                                                                                         |
|        |                                             | 24 VAC/VDC                | A16L-T□M-24-2                           | A16L-T□A-24-2                         |                                                                                         |
|        | Non-lighted                                 |                           | A16-T□M-2                               | A16-T□A-2                             |                                                                                         |

\*1. Enter the desired color symbol for the Pushbutton in the □.

\*2. Black ("B") Pushbuttons are only available for non-lighted models.



Oil-resistant IP66

| Output | Lighting                                    | Item<br>Operating voltage | Momentary operation<br>(Self-resetting) | Alternate operation<br>(Self-holding) | Pushbutton color<br>symbol *1                                                           |
|--------|---------------------------------------------|---------------------------|-----------------------------------------|---------------------------------------|-----------------------------------------------------------------------------------------|
| SPDT   | LED without<br>Voltage<br>Reduction<br>Unit | 5 VDC                     | A165L-T□M-5D-1                          | A165L-T□A-5D-1                        | R: red, Y: yellow<br>PY: pure yellow<br>G: green, A: blue<br>W: white<br>PW: pure white |
|        |                                             | 12 VAC/VDC                | A165L-T□M-12D-1                         | A165L-T□A-12D-1                       |                                                                                         |
|        |                                             | 24 VAC/VDC                | A165L-T□M-24D-1                         | A165L-T□A-24D-1                       |                                                                                         |
|        | Incandescent<br>lamp                        | 5 VAC/VDC                 | A165L-T□M-5-1                           | A165L-T□A-5-1                         | R: red, Y: yellow<br>PY: pure yellow<br>G: green, W: white<br>A: blue<br>B: black *2    |
|        |                                             | 12 VAC/VDC                | A165L-T□M-12-1                          | A165L-T□A-12-1                        |                                                                                         |
|        |                                             | 24 VAC/VDC                | A165L-T□M-24-1                          | A165L-T□A-24-1                        |                                                                                         |
|        | Non-lighted                                 |                           | A165-T□M-1                              | A165-T□A-1                            |                                                                                         |
| DPDT   | LED without<br>Voltage<br>Reduction<br>Unit | 5 VDC                     | A165L-T□M-5D-2                          | A165L-T□A-5D-2                        | R: red, Y: yellow<br>PY: pure yellow<br>G: green, A: blue<br>W: white<br>PW: pure white |
|        |                                             | 12 VAC/VDC                | A165L-T□M-12D-2                         | A165L-T□A-12D-2                       |                                                                                         |
|        |                                             | 24 VAC/VDC                | A165L-T□M-24D-2                         | A165L-T□A-24D-2                       |                                                                                         |
|        | Incandescent<br>lamp                        | 5 VAC/VDC                 | A165L-T□M-5-2                           | A165L-T□A-5-2                         | R: red, Y: yellow<br>PY: pure yellow<br>G: green, W: white<br>A: blue<br>B: black *2    |
|        |                                             | 12 VAC/VDC                | A165L-T□M-12-2                          | A165L-T□A-12-2                        |                                                                                         |
|        |                                             | 24 VAC/VDC                | A165L-T□M-24-2                          | A165L-T□A-24-2                        |                                                                                         |
|        | Non-lighted                                 |                           | A165-T□M-2                              | A165-T□A-2                            |                                                                                         |

\*1. Enter the desired color symbol for the Pushbutton in the □.

\*2. Black ("B") Pushbuttons are only available for non-lighted models.

Individual models: Refer to pages 9 to 13.

(The Pushbutton, Lamp, Case, and Switch can be ordered separately.)


■ Ratings: Refer to page 16. ■ Characteristics: Refer to page 16.

■ Accessories: Refer to page 15.

## Ordering Information

**Ordering as a Set** ..... The model numbers used to order sets of Units are given in the following tables. One set comprises the Pushbutton, Lamp (lighted models only), Case, and Switch.

### Models with Reduced-voltage Lighting and Solder Terminals



A16□-T1

Note: Models with voltage ratings of 200 to 220 VAC/DC (T2 models) are listed with models with screw-less clamp

IP40

| Output | Lighting                                                    | Operating voltage | Momentary operation<br>(Self-resetting) | Alternate operation<br>(Self-holding) | Pushbutton color<br>symbol *                                                            |
|--------|-------------------------------------------------------------|-------------------|-----------------------------------------|---------------------------------------|-----------------------------------------------------------------------------------------|
| SPDT   | LED (with built-in<br>reduced-voltage<br>lighting function) | 100/110 VAC/VDC   | A16L-Δ□M-T1-1                           | A16L-Δ□A-T1-1                         | R: red, Y: yellow<br>PY: pure yellow<br>G: green, W: white<br>A: blue<br>PW: pure white |
| DPDT   |                                                             | 100/110 VAC/VDC   | A16L-Δ□M-T1-2                           | A16L-Δ□A-T1-2                         |                                                                                         |


\* Enter the desired shape for the Pushbutton in Δ: J (rectangular), A (square), or T (round). Enter the desired color symbol for the Pushbutton in the □.

Oil-resistant IP66

| Output | Lighting                                                    | Operating voltage | Momentary operation<br>(Self-resetting) | Alternate operation<br>(Self-holding) | Pushbutton color<br>symbol *                                                            |
|--------|-------------------------------------------------------------|-------------------|-----------------------------------------|---------------------------------------|-----------------------------------------------------------------------------------------|
| SPDT   | LED (with built-in<br>reduced-voltage<br>lighting function) | 100/110 VAC/VDC   | A165L-Δ□M-T1-1                          | A165L-Δ□A-T1-1                        | R: red, Y: yellow<br>PY: pure yellow<br>G: green, W: white<br>A: blue<br>PW: pure white |
| DPDT   |                                                             | 100/110 VAC/VDC   | A165L-Δ□M-T1-2                          | A165L-Δ□A-T1-2                        |                                                                                         |

\* Enter the desired shape for the Pushbutton in Δ: J (rectangular), A (square), or T (round). Enter the desired color symbol for the Pushbutton in the □.

### Screw-less Clamp Models



A16□-2S

IP40

| Output | Lighting                                                    | Operating voltage | Momentary operation<br>(Self-resetting) | Alternate operation<br>(Self-holding) | Pushbutton color<br>symbol *1                                                                          |
|--------|-------------------------------------------------------------|-------------------|-----------------------------------------|---------------------------------------|--------------------------------------------------------------------------------------------------------|
| DPDT   | LED                                                         | 5 VDC             | A16L-Δ□M-5D-2S                          | A16L-Δ□A-5D-2S                        | R: red, Y: yellow<br>PY: pure yellow<br>G: green, W: white<br>A: blue<br>PW: pure white<br>B: black *2 |
|        |                                                             | 12 VAC/VDC        | A16L-Δ□M-12D-2S                         | A16L-Δ□A-12D-2S                       |                                                                                                        |
|        |                                                             | 24 VAC/VDC        | A16L-Δ□M-24D-2S                         | A16L-Δ□A-24D-2S                       |                                                                                                        |
|        | LED (with built-in<br>reduced-voltage<br>lighting function) | 100/110 VAC/VDC   | A16L-Δ□M-T1-2S                          | A16L-Δ□A-T1-2S                        |                                                                                                        |
|        |                                                             | 200/220 VAC/VDC   | A16L-Δ□M-T2-2S                          | A16L-Δ□A-T2-2S                        |                                                                                                        |
|        | Non-lighted                                                 |                   | A16-Δ□M-2S                              | A16-Δ□A-2S                            |                                                                                                        |

\*1. Enter the desired shape for the Pushbutton in Δ: J (rectangular), A (square), or T (round). Enter the desired color symbol for the Pushbutton in the □.

\*2. Black ("B") Pushbuttons are only available for non-lighted models.

Oil-resistant IP66

| Output | Lighting                                                    | Operating voltage | Momentary operation<br>(Self-resetting) | Alternate operation<br>(Self-holding) | Pushbutton color<br>symbol *1                                                                          |
|--------|-------------------------------------------------------------|-------------------|-----------------------------------------|---------------------------------------|--------------------------------------------------------------------------------------------------------|
| DPDT   | LED                                                         | 5 VDC             | A165L-Δ□M-5D-2S                         | A165L-Δ□A-5D-2S                       | R: red, Y: yellow<br>PY: pure yellow<br>G: green, W: white<br>A: blue<br>PW: pure white<br>B: black *2 |
|        |                                                             | 12 VAC/VDC        | A165L-Δ□M-12D-2S                        | A165L-Δ□A-12D-2S                      |                                                                                                        |
|        |                                                             | 24 VAC/VDC        | A165L-Δ□M-24D-2S                        | A165L-Δ□A-24D-2S                      |                                                                                                        |
|        | LED (with built-in<br>reduced-voltage<br>lighting function) | 100/110 VAC/VDC   | A165L-Δ□M-T1-2S                         | A165L-Δ□A-T1-2S                       |                                                                                                        |
|        |                                                             | 200/220 VAC/VDC   | A165L-Δ□M-T2-2S                         | A165L-Δ□A-T2-2S                       |                                                                                                        |
|        | Non-lighted                                                 |                   | A165-Δ□M-2S                             | A165-Δ□A-2S                           |                                                                                                        |

\*1. Enter the desired shape for the Pushbutton in Δ: J (rectangular), A (square), or T (round). Enter the desired color symbol for the Pushbutton in the □.

\*2. Black ("B") Pushbuttons are only available for non-lighted models.

## Ordering Information

**Ordering as a Set** ..... The model numbers used to order sets of Units are given in the following tables. One set comprises the Pushbutton, Lamp (lighted models only), Case, and Switch.

### Models with PCB Terminals



A16□-P

IP40

| Output | Lighting    | Operating voltage | Item | Momentary operation<br>(Self-resetting) | Pushbutton color<br>symbol *1                                                            |
|--------|-------------|-------------------|------|-----------------------------------------|------------------------------------------------------------------------------------------|
| SPDT   | LED         | 5 VDC             |      | A16L-Δ□M-5D-1P                          | R: red<br>Y: yellow<br>PY: pure yellow<br>G: green<br>A: blue<br>W: white<br>B: black *2 |
|        |             | 12 VAC/VDC        |      | A16L-Δ□M-12D-1P                         |                                                                                          |
|        |             | 24 VAC/VDC        |      | A16L-Δ□M-24D-1P                         |                                                                                          |
|        | Non-lighted |                   |      | A16-Δ□M-1P                              |                                                                                          |
| DPDT   | LED         | 5 VDC             |      | A16L-Δ□M-5D-2P                          |                                                                                          |
|        |             | 12 VAC/VDC        |      | A16L-Δ□M-12D-2P                         |                                                                                          |
|        |             | 24 VAC/VDC        |      | A16L-Δ□M-24D-2P                         |                                                                                          |
|        | Non-lighted |                   |      | A16-Δ□M-2P                              |                                                                                          |

Note: Contact your OMRON representative about Selector Switches and Key Selector Switches.

\*1. Enter the desired shape for the Pushbutton in Δ: J (rectangular), A (square), or T (round). Enter the desired color symbol for the Pushbutton in the □.

\*2. Black ("B") Pushbuttons are only available for non-lighted models.

IP66

| Output | Lighting    | Operating voltage | Item | Momentary operation<br>(Self-resetting) | Pushbutton color<br>symbol *1                                                            |
|--------|-------------|-------------------|------|-----------------------------------------|------------------------------------------------------------------------------------------|
| SPDT   | LED         | 5 VDC             |      | A165L-Δ□M-5D-1P                         | R: red<br>Y: yellow<br>PY: pure yellow<br>G: green<br>A: blue<br>W: white<br>B: black *2 |
|        |             | 12 VAC/VDC        |      | A165L-Δ□M-12D-1P                        |                                                                                          |
|        |             | 24 VAC/VDC        |      | A165L-Δ□M-24D-1P                        |                                                                                          |
|        | Non-lighted |                   |      | A165-Δ□M-1P                             |                                                                                          |
| DPDT   | LED         | 5 VDC             |      | A165L-Δ□M-5D-2P                         |                                                                                          |
|        |             | 12 VAC/VDC        |      | A165L-Δ□M-12D-2P                        |                                                                                          |
|        |             | 24 VAC/VDC        |      | A165L-Δ□M-24D-2P                        |                                                                                          |
|        | Non-lighted |                   |      | A165-Δ□M-2P                             |                                                                                          |

Note: Contact your OMRON representative about Selector Switches and Key Selector Switches.


\*1. Enter the desired shape for the Pushbutton in Δ: J (rectangular), A (square), or T (round). Enter the desired color symbol for the Pushbutton in the □.

\*2. Black ("B") Pushbuttons are only available for non-lighted models.


Ordering Information

Illumination Only and Colored Illumination for Models with LEDs

With illumination only, the color of the lighted surface is the same when the LED is lit and when it is not lit.  
Example: Red Illumination

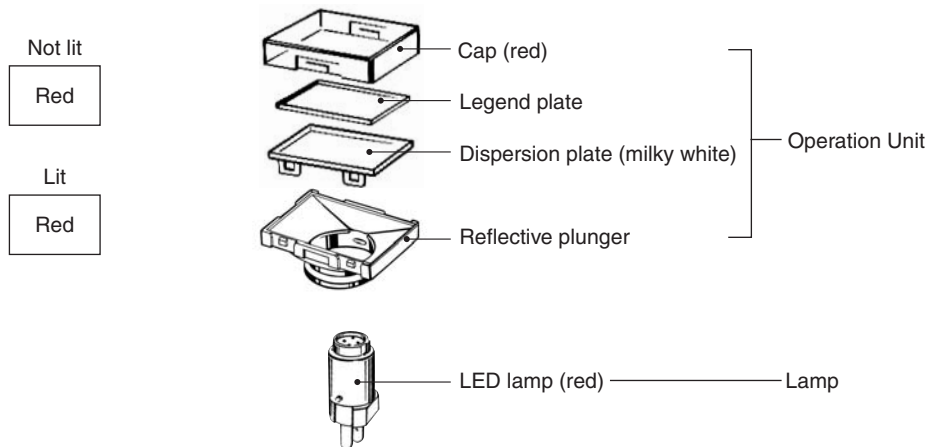

With colored illumination, the color of the lighted surface is white when the LED is not lit and the LED emits another color when it is lit.  
Example: Red Illumination

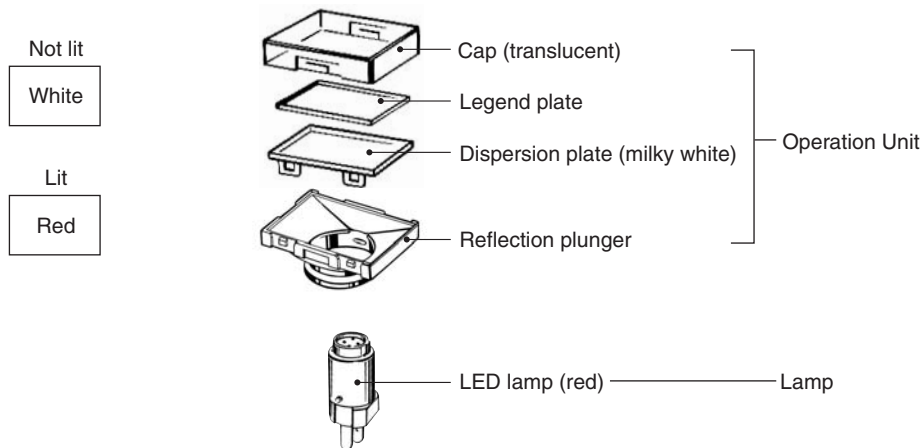

Ordering: For colored illumination, order the Pushbutton, Case, Lamp, and Switch separately.

| Color emitted when lit | Operation Unit                                                          | Case                                                                                                                                                                                       | Lamp (LED) |                                                                                                      | Switch                                       |
|------------------------|-------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------------------------------------------------------------------------------------------------|----------------------------------------------|
| Red                    | IP40<br>A16L-□W                                                         | IP40                                                                                                                                                                                       | A16-□DSR   | Specify one of the following symbols in the box (□).<br>5: 5 VDC<br>12: 12 VAC/VDC<br>24: 24 VAC/VDC | Refer to page 14. Any Switch can be mounted. |
| Yellow                 | IP66<br>A165L-□W                                                        | • Momentary: A16-C□M<br>• Alternate: A16-C□A                                                                                                                                               | A16-□DSY   |                                                                                                      |                                              |
| Green                  | Insert one of the following symbols into the box (□).<br>J: Rectangular | IP66                                                                                                                                                                                       | A16-□DSG   |                                                                                                      |                                              |
| Blue                   | A: Square<br>T: Round                                                   | • Momentary: A165-C□M<br>• Alternate: A165-C□A<br>Insert one of the following symbols into the box (□).<br>J: Rectangular (2-way guard)<br>A: Square (2-way guard)<br>T: Round (projected) | A16-□DA    |                                                                                                      |                                              |

Ordering Information

**Ordering Individually** ..... Pushbuttons, Lamps, Cases, and Switches can be ordered separately. Combinations that are not available as sets can be created using individual Units. Also, store the parts as spares for maintenance and repairs.

| Pushbutton                                                                        |                                                                                   |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Rectangular Models                                                                | Square Models                                                                     | Round Models                                                                        |
|  |  |  |

Note: Use IP40 Operation Units with IP40 Case and use IP66 Operation Units with IP66 Case. There is no Legend Plate built into the Operation Unit. A Legend Plate is built into the Operation Unit. However, if the Operation Unit is black (non-lighted models only), a Legend Plate is not built in.



| Case                                                                                                        |
|-------------------------------------------------------------------------------------------------------------|
|                            |
| Note: Operation Unit Sets that combine an Operation Unit and a Case are also available. (Refer to page 10.) |



Lighted Models




| Lamp                                                                                |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| LED                                                                                 | Incandescent lamp                                                                   |
|  |  |



Non-lighted Models




| Switch                                                                                      |
|---------------------------------------------------------------------------------------------|
| Solder terminals (no transformer)                                                           |
|          |
| Lighted/non-lighted                                                                         |
| Note: Switch Units that combine a Lamp and a Switch are also available. (Refer to page 11.) |

Ordering set combinations: Refer to pages 3 to 7.

- Specifications: Refer to page 16.
- Accessories, Replacement, and Tools: Refer to page 15.


Ordering Information

Units..... Select a Pushbutton Unit (Pushbutton and Case) and a Switch Unit (Lamp and Switch).

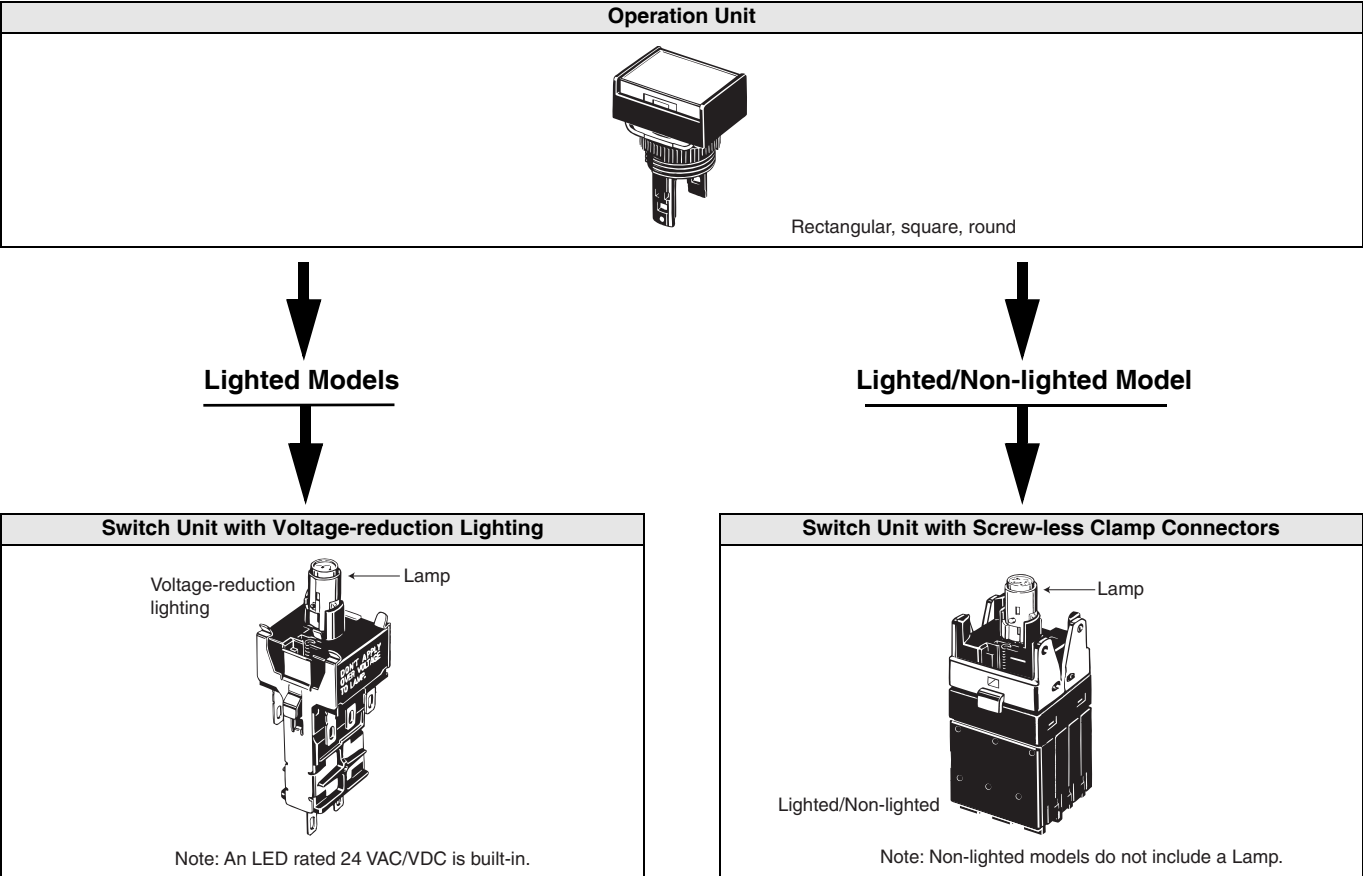

Unit Sets..... Sets that combine an Operation Unit and a Case.

Operation Unit

| Appearance                                                                          | Classification     |                     |                           | Model    |
|-------------------------------------------------------------------------------------|--------------------|---------------------|---------------------------|----------|
|  | IP40               | Momentary operation | Rectangular (2-way guard) | A16-J□M  |
|                                                                                     |                    |                     | Square (2-way guard)      | A16-A□M  |
|                                                                                     |                    |                     | Round (projected)         | A16-T□M  |
|                                                                                     |                    | Alternate operation | Rectangular (2-way guard) | A16-J□A  |
|                                                                                     |                    |                     | Square (2-way guard)      | A16-A□A  |
|                                                                                     |                    |                     | Round (projected)         | A16-T□A  |
|                                                                                     | Oil-resistant IP66 | Momentary operation | Rectangular (2-way guard) | A165-J□M |
|                                                                                     |                    |                     | Square (2-way guard)      | A165-A□M |
|                                                                                     |                    |                     | Round (projected)         | A165-T□M |
|                                                                                     |                    | Alternate operation | Rectangular (2-way guard) | A165-J□A |
|                                                                                     |                    |                     | Square (2-way guard)      | A165-A□A |
|                                                                                     |                    |                     | Round (projected)         | A165-T□A |

Insert one of the following symbols into the box (□).

| Symbol | Color       | Remarks                                          |
|--------|-------------|--------------------------------------------------|
| R      | Red         | LED indicator, incandescent lamp, or non-lighted |
| Y      | Yellow      |                                                  |
| PY     | Pure yellow |                                                  |
| A      | Blue        |                                                  |
| W      | White*      |                                                  |
| GY     | Green       | LED only                                         |
| G      | Green       | Incandescent lamp or non-lighted                 |
| B      | Black       | Non-lighted only                                 |

\* Use this pushbutton color if the illumination color of the LED is white or pure white.



## Ordering Information

**Unit Sets** ..... Sets that combine a Switch and a Lamp.

### Switch Units with Incandescent Lamps

| Appearance                                                                        | Classification                |                  |      | Model    |
|-----------------------------------------------------------------------------------|-------------------------------|------------------|------|----------|
|  | Standard loads and microloads | Solder terminals | SPDT | A16L-□-1 |
|                                                                                   |                               |                  | DPDT | A16L-□-2 |

### Switch Units with LED Lamps

| Appearance                                                                        | Classification                |                  |      | Model       |
|-----------------------------------------------------------------------------------|-------------------------------|------------------|------|-------------|
|  | Standard loads and microloads | Solder terminals | SPDT | A16L-Δ-□-1  |
|                                                                                   |                               |                  | DPDT | A16L-Δ-□-2  |
|                                                                                   |                               | PCB terminals    | SPDT | A16L-Δ-□-1P |
|                                                                                   |                               |                  | DPDT | A16L-Δ-□-2P |

### Switch Units with Voltage-reduction Lighting (Soldered Terminals)

| Appearance                                                                        | Classification                |      | Operating voltage | Model       |
|-----------------------------------------------------------------------------------|-------------------------------|------|-------------------|-------------|
|  | Standard loads and microloads | SPDT | 100/110 VAC/VDC   | A16L-Δ-T1-1 |
|                                                                                   |                               | DPDT | 100/110 VAC/VDC   | A16L-Δ-T1-2 |

Note: An LED rated 24 VAC/VDC is built-in.

### Switch Units with Screw-less Clamp Connectors

| Appearance                                                                          | Classification                |      |             |                                          | Model           |                     |
|-------------------------------------------------------------------------------------|-------------------------------|------|-------------|------------------------------------------|-----------------|---------------------|
|  | Standard loads and microloads | DPDT | Non-lighted |                                          | <b>A16-2S</b>   |                     |
|                                                                                     |                               |      | Lighted     | No voltage-reduction lighting            |                 | <b>A16L-Δ-□-2S</b>  |
|                                                                                     |                               |      |             | Voltage-reduc-<br>tion lighting<br>Note. | 100/110 VAC/VDC | <b>A16L-Δ-T1-2S</b> |
|                                                                                     |                               |      |             |                                          | 200/220 VAC/VDC | <b>A16L-Δ-T2-2S</b> |

Note: The 100-V models and 200-V models an LED rated 24 VAC/VDC is built-in.

Insert symbols in Δ and □.

Δ

| Symbol | Color  |
|--------|--------|
| R      | Red    |
| Y      | Yellow |
| G      | Green  |
| W      | White  |
| A      | Blue   |

□

| Symbol | Type         | Operating voltage |
|--------|--------------|-------------------|
| 5      | Incandescent | 5 VAC/VDC         |
| 12     |              | 12 VAC/VDC        |
| 24     |              | 24 VAC/VDC        |
| 5D     | LED          | 5 VDC             |
| 12D    |              | 12 VAC/VDC        |
| 24D    |              | 24 VAC/VDC        |

Note: If the Pushbutton is pure yellow (PY), use white (W) for the Switch Unit.

## Ordering Information

**Ordering Individually** ..... Pushbuttons, Lamps, Cases, and Switches can be ordered separately. Combinations that are not available as sets can be created using individual Units. Also, store the parts as spares for maintenance and repairs.

### Pushbuttons

#### LED

| Degree of protection | IP40                                                                                             |                                                                                             |                                                                                            | Oil-resistant IP66                                                                                |                                                                                               |                                                                                              |
|----------------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
|                      | Rectangular<br> | Square<br> | Round<br> | Rectangular<br> | Square<br> | Round<br> |
| Color                |                                                                                                  |                                                                                             |                                                                                            |                                                                                                   |                                                                                               |                                                                                              |
| Red                  | A16L-JR                                                                                          | A16L-AR                                                                                     | A16L-TR                                                                                    | A165L-JR                                                                                          | A165L-AR                                                                                      | A165L-TR                                                                                     |
| Yellow               | A16L-JY                                                                                          | A16L-AY                                                                                     | A16L-TY                                                                                    | A165L-JY                                                                                          | A165L-AY                                                                                      | A165L-TY                                                                                     |
| Pure yellow          | A16L-JPY                                                                                         | A16L-APY                                                                                    | A16L-TPY                                                                                   | A165L-JPY                                                                                         | A165L-APY                                                                                     | A165L-TPY                                                                                    |
| Green                | A16L-JGY                                                                                         | A16L-AGY                                                                                    | A16L-TGY                                                                                   | A165L-JGY                                                                                         | A165L-AGY                                                                                     | A165L-TGY                                                                                    |
| White*               | A16L-JW                                                                                          | A16L-AW                                                                                     | A16L-TW                                                                                    | A165L-JW                                                                                          | A165L-AW                                                                                      | A165L-TW                                                                                     |
| Blue                 | A16L-JA                                                                                          | A16L-AA                                                                                     | A16L-TA                                                                                    | A165L-JA                                                                                          | A165L-AA                                                                                      | A165L-TA                                                                                     |

\* Use this pushbutton color if the illumination color of the LED is white or pure white.

### Incandescent Lamps (With the exception of green, the Units are the same as for LEDs.)

| Degree of protection | IP40                                                                                             |                                                                                             |                                                                                            | Oil-resistant IP66                                                                                |                                                                                               |                                                                                              |
|----------------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
|                      | Rectangular<br> | Square<br> | Round<br> | Rectangular<br> | Square<br> | Round<br> |
| Color                |                                                                                                  |                                                                                             |                                                                                            |                                                                                                   |                                                                                               |                                                                                              |
| Red                  | A16L-JR                                                                                          | A16L-AR                                                                                     | A16L-TR                                                                                    | A165L-JR                                                                                          | A165L-AR                                                                                      | A165L-TR                                                                                     |
| Yellow               | A16L-JY                                                                                          | A16L-AY                                                                                     | A16L-TY                                                                                    | A165L-JY                                                                                          | A165L-AY                                                                                      | A165L-TY                                                                                     |
| Pure yellow          | A16L-JPY                                                                                         | A16L-APY                                                                                    | A16L-TPY                                                                                   | A165L-JPY                                                                                         | A165L-APY                                                                                     | A165L-TPY                                                                                    |
| Green                | A16L-JG                                                                                          | A16L-AG                                                                                     | A16L-TG                                                                                    | A165L-JG                                                                                          | A165L-AG                                                                                      | A165L-TG                                                                                     |
| White                | A16L-JW                                                                                          | A16L-AW                                                                                     | A16L-TW                                                                                    | A165L-JW                                                                                          | A165L-AW                                                                                      | A165L-TW                                                                                     |
| Blue                 | A16L-JA                                                                                          | A16L-AA                                                                                     | A16L-TA                                                                                    | A165L-JA                                                                                          | A165L-AA                                                                                      | A165L-TA                                                                                     |

### Non-lighted (Same as Units for incandescent lamps.)

| Degree of protection | IP40                                                                                               |                                                                                               |                                                                                              | Oil-resistant IP66                                                                                  |                                                                                                 |                                                                                                |
|----------------------|----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
|                      | Rectangular<br> | Square<br> | Round<br> | Rectangular<br> | Square<br> | Round<br> |
| Color                |                                                                                                    |                                                                                               |                                                                                              |                                                                                                     |                                                                                                 |                                                                                                |
| Red                  | A16L-JR                                                                                            | A16L-AR                                                                                       | A16L-TR                                                                                      | A165L-JR                                                                                            | A165L-AR                                                                                        | A165L-TR                                                                                       |
| Yellow               | A16L-JY                                                                                            | A16L-AY                                                                                       | A16L-TY                                                                                      | A165L-JY                                                                                            | A165L-AY                                                                                        | A165L-TY                                                                                       |
| Pure yellow          | A16L-JPY                                                                                           | A16L-APY                                                                                      | A16L-TPY                                                                                     | A165L-JPY                                                                                           | A165L-APY                                                                                       | A165L-TPY                                                                                      |
| Green                | A16L-JG                                                                                            | A16L-AG                                                                                       | A16L-TG                                                                                      | A165L-JG                                                                                            | A165L-AG                                                                                        | A165L-TG                                                                                       |
| White                | A16L-JW                                                                                            | A16L-AW                                                                                       | A16L-TW                                                                                      | A165L-JW                                                                                            | A165L-AW                                                                                        | A165L-TW                                                                                       |
| Blue                 | A16L-JA                                                                                            | A16L-AA                                                                                       | A16L-TA                                                                                      | A165L-JA                                                                                            | A165L-AA                                                                                        | A165L-TA                                                                                       |
| Black                | A16L-JB                                                                                            | A16L-AB                                                                                       | A16L-TB                                                                                      | A165L-JB                                                                                            | A165L-AB                                                                                        | A165L-TB                                                                                       |

Ordering set combinations: Refer to pages 3 to 7.

■ Specifications: Refer to page 16.

■ Accessories, Replacement, and Tools: Refer to page 15.

## Ordering Information

**Ordering Individually** ..... Pushbuttons, Lamps, Cases, and Switches can be ordered separately. Combinations that are not available as sets can be created using individual Units. Also, store the parts as spares for maintenance and repairs.

### Lamps

#### LED

| Operating voltage | High brightness  |            |            |
|-------------------|---------------------------------------------------------------------------------------------------|------------|------------|
| Light color       | 5 VDC                                                                                             | 12 VAC/VDC | 24 VAC/VDC |
| Red               | A16-5DSR                                                                                          | A16-12DSR  | A16-24DSR  |
| Yellow            | A16-5DSY                                                                                          | A16-12DSY  | A16-24DSY  |
| Green             | A16-5DSG                                                                                          | A16-12DSG  | A16-24DSG  |
| White *           | A16-5DSW                                                                                          | A16-12DSW  | A16-24DSW  |
| Blue              | A16-5DA                                                                                           | A16-12DA   | A16-24DA   |
| Pure white        | A16-5DPW                                                                                          | A16-12DPW  | A16-24DPW  |

Note: 1. If an LED lamp with normal brightness is needed, select a Lamp used in the A3C.


2. For voltage-reduction lighting use the A16-24D□. Only 24 VAC/VDC LED lamps can be used.

\* Use the white LED together with white or pure yellow Pushbuttons.

### Incandescent Lamp

| Appearance                                                                        | Operating voltage | Model  |
|-----------------------------------------------------------------------------------|-------------------|--------|
|  | 5 VAC/VDC         | A16-5  |
|                                                                                   | 12 VAC/VDC        | A16-12 |
|                                                                                   | 24 VAC/VDC        | A16-24 |

### Cases

| Appearance                                                                          | Classification     |                     |                           | Model    |
|-------------------------------------------------------------------------------------|--------------------|---------------------|---------------------------|----------|
|  | IP40               | Momentary operation | Rectangular (2-way guard) | A16-CJM  |
|                                                                                     |                    |                     | Square (2-way guard)      | A16-CAM  |
|                                                                                     |                    |                     | Round (projected)         | A16-CTM  |
|                                                                                     |                    | Alternate operation | Rectangular (2-way guard) | A16-CJA  |
|                                                                                     |                    |                     | Square (2-way guard)      | A16-CAA  |
|                                                                                     |                    |                     | Round (projected)         | A16-CTA  |
|                                                                                     | Oil-resistant IP66 | Momentary operation | Rectangular (2-way guard) | A165-CJM |
|                                                                                     |                    |                     | Square (2-way guard)      | A165-CAM |
|                                                                                     |                    |                     | Round (projected)         | A165-CTM |
|                                                                                     |                    | Alternate operation | Rectangular (2-way guard) | A165-CJA |
|                                                                                     |                    |                     | Square (2-way guard)      | A165-CAA |
|                                                                                     |                    |                     | Round (projected)         | A165-CTA |



Ordering set combinations: Refer to pages 3 to 7.

■ Specifications: Refer to page 16.



■ Accessories, Replacement, and Tools: Refer to page 15.

Ordering Information

Switches

| Appearance                                                                        | Classification                   |                                      |      | Model  |
|-----------------------------------------------------------------------------------|----------------------------------|--------------------------------------|------|--------|
| Solder terminal                                                                   | Lighted/non-lighted (common use) | Standard load/microload (common use) | SPDT | A16-1  |
|  |                                  |                                      | DPDT | A16-2  |
| PCB terminal                                                                      |                                  |                                      | SPDT | A16-1P |
|  |                                  |                                      | DPDT | A16-2P |
| Screw-less Clamp                                                                  |                                  |                                      | DPDT | A16-2S |
|  |                                  |                                      |      |        |

Switches with Reduced-voltage Lighting


| Appearance                                                                          | Classification |                                      |      | Model     |
|-------------------------------------------------------------------------------------|----------------|--------------------------------------|------|-----------|
| Solder terminal                                                                     | 100 V          | Standard load/microload (common use) | SPDT | A16-T1-1  |
|  |                |                                      | DPDT | A16-T1-2  |
| Screw-less Clamp                                                                    | 100 V          |                                      | DPDT | A16-T1-2S |
|  | 200 V          |                                      |      | A16-T2-2S |

Note: For a Switch with Reduced-voltage Lighting, use the A16-24D□.

## Ordering Information

### Accessories, Replacements, and Tools

#### Accessories

| Name          | Appearance                                                                        | Classification              | Model             | Remarks                                                                                                       |
|---------------|-----------------------------------------------------------------------------------|-----------------------------|-------------------|---------------------------------------------------------------------------------------------------------------|
| Switch Guards |  | For rectangular models      | <b>A16ZJ-5050</b> | Cannot be used with the Dust Cover.                                                                           |
|               |                                                                                   | For square and round models | <b>A16ZA-5050</b> |                                                                                                               |
| Dust Covers   |  | For rectangular models      | <b>A16ZJ-5060</b> | Cannot be used with the Switch Guard.<br>Can be operated with the Dust Cover attached.                        |
|               |                                                                                   | For square models           | <b>A16ZA-5060</b> |                                                                                                               |
|               |                                                                                   | For round models            | <b>A16ZT-5060</b> |                                                                                                               |
| Panel Plugs   |  | For rectangular models      | <b>A16ZJ-3003</b> | Used for covering the panel cutouts for future panel expansion.<br>Protective structure: IP40<br>Color: Black |
|               |                                                                                   | For square models           | <b>A16ZA-3003</b> |                                                                                                               |
|               |                                                                                   | For round models            | <b>A16ZT-3003</b> |                                                                                                               |

#### Replacements

| Name                                | Appearance                                                                          | Classification |                                       |                               | Model               | Remarks                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------------------|-------------------------------------------------------------------------------------|----------------|---------------------------------------|-------------------------------|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Legend Plates                       |    | Rectangular    | Oil-resistant IP66                    | Milky                         | <b>A16ZJ-5204</b>   | <ul style="list-style-type: none"><li>A Legend Plate is provided as a standard feature with the Operation Unit. However, if the Operation Unit is black (non-lighted models only), a Legend Plate is not provided.</li></ul>                                                                                                                                                                                                                                                                                           |
|                                     |                                                                                     | Square         | Oil-resistant IP66                    | Milky                         | <b>A16ZA-5204</b>   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                                     |                                                                                     | Round          | Oil-resistant IP66                    | Milky                         | <b>A16ZT-5204</b>   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Color Caps (for IP40)               |   | Rectangular    | LED lamp/incandescent lamp/nonlighted | White                         | <b>A16Z□-5001W</b>  | <ul style="list-style-type: none"><li>Insert one of the following letters into the box (□).<br/>J: Rectangular<br/>A: Square<br/>T: Round</li><li>The Color Cap is usually supplied. Replace the Cap if the color is to be changed.</li><li>When using an LED indicator, be sure to use a Color Cap that matches the luminescent color of the LED.</li><li>The materials used for the IP40 and oil-resistant IP66 are different so be sure to use a Color Cap that matches the specifications of the Switch.</li></ul> |
|                                     |                                                                                     |                |                                       | Red                           | <b>A16Z□-5001R</b>  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                                     |                                                                                     |                |                                       | Yellow                        | <b>A16Z□-5001Y</b>  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                                     |                                                                                     |                |                                       | Pure yellow                   | <b>A16Z□-5001PY</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                                     |                                                                                     |                |                                       | Blue                          | <b>A16Z□-5001A</b>  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Square                              |  | LED lamp       | Green                                 | <b>A16Z□-5001GY</b>           |                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                                     |                                                                                     |                | Incandescent lamp/non-lighted         | Green                         | <b>A16Z□-5001G</b>  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                                     |                                                                                     |                | Non-lighted                           | Black                         | <b>A16Z□-5011B</b>  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Color Caps (for oil-resistant IP66) |  | Round          | LED lamp/incandescent lamp/nonlighted | White                         | <b>A16Z□-5101W</b>  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                                     |                                                                                     |                |                                       | Red                           | <b>A16Z□-5101R</b>  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                                     |                                                                                     |                |                                       | Yellow                        | <b>A16Z□-5101Y</b>  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                                     |                                                                                     |                |                                       | Pure yellow                   | <b>A16Z□-5101PY</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                                     |                                                                                     |                |                                       | Blue                          | <b>A16Z□-5101A</b>  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                                     |                                                                                     |                |                                       | LED lamp                      | Green               | <b>A16Z□-5101GY</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                                     |                                                                                     |                |                                       | Incandescent lamp/non-lighted | Green               | <b>A16Z□-5101G</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|                                     |                                                                                     |                |                                       | Non-lighted                   | Black               | <b>A16Z□-5111B</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

#### Tools

| Name                       | Appearance                                                                          | Model            | Applicable types  |                           |                          |                       |           | Remarks                                         |
|----------------------------|-------------------------------------------------------------------------------------|------------------|-------------------|---------------------------|--------------------------|-----------------------|-----------|-------------------------------------------------|
|                            |                                                                                     |                  | Pushbutton Switch | Knob-type Selector Switch | Key-type Selector Switch | Emergency Stop Switch | Indicator |                                                 |
| Operation Unit Extractor   |  | <b>A3PJ-5080</b> | ●                 | —                         | —                        | —                     | ●         | Convenient for extracting Pushbutton Switches   |
| Screw Fitting              |  | <b>A16Z-3004</b> | ●                 | ●                         | ●                        | ●                     | ●         | Convenient for ganged installation.             |
| Socket Unit Lamp Extractor |  | <b>A16Z-5080</b> | ●                 | ●                         | ●                        | ●                     | ●         | Convenient for extracting the Switch and Lamps. |

## Specifications

### Approved Standard Ratings

#### UL, cUL (File No. E41515)

5 A at 125 VAC, 3 A at 250 VAC (general use)  
3 A at 30 VDC (resistive)

Note: Certification has been obtained for the Switch.  
For detailed information on individual products that have received certification, consult your supplier.

#### TÜV (EN60947-5-1) (Low Voltage Directive)

3 A at 250 VAC  
3 A at 30 VDC

#### CCC (GB14048.5)

5 A at 125 VAC  
3 A at 250 VAC  
3 A at 30 VDC

### Ratings

#### Switch Ratings

| Rated voltage | Resistive load |
|---------------|----------------|
| 125 VAC       | 5 A            |
| 250 VAC       | 3 A            |
| 30 VDC        | 3 A            |

Minimum applicable load: 1 mA at 5 VDC

Rated values are obtained from tests conducted under the following conditions.

1. Load: Resistive load
2. Mounting conditions: No vibration and no shock
3. Temperature: 20 ±2°C
4. Operating frequency: 20 operations/min

#### Contact Form

| Name | Contact |
|------|---------|
| DPDT |         |

### Characteristics

#### Socket Unit

| Item                            | Type                                    | Pushbutton Switch                                                                                    |
|---------------------------------|-----------------------------------------|------------------------------------------------------------------------------------------------------|
| Allowable operating frequency   | Mechanical                              | Momentary operation: 120 operations/minute max.<br>Alternate operation: 60 operations/minute max. *1 |
|                                 | Electrical                              | 20 operations/minute max. *1                                                                         |
| Insulation resistance           |                                         | 100 MΩ min. (at 500V DC)                                                                             |
| Contact resistance              |                                         | 100 mΩ max. (initial value)                                                                          |
| Dielectric strength             | Between terminals of same polarity      | 1,000 VAC, 50/60 Hz for 1 minute                                                                     |
|                                 | Between terminals of different polarity | 2,000 VAC, 50/60 Hz for 1 minute                                                                     |
|                                 | Between each terminal and ground        | 2,000 VAC, 50/60 Hz for 1 minute                                                                     |
|                                 | Between lamp terminals                  | 1,000 VAC, 50/60 Hz for 1 minute *2                                                                  |
| Vibration resistance            | Malfunction                             | 10 to 55 Hz, 1.5-mm double amplitude (malfunction within 1 ms)                                       |
| Shock resistance                | Destruction                             | 500 m/s <sup>2</sup> max.                                                                            |
|                                 | Malfunction                             | 150 m/s <sup>2</sup> max. (malfunction within 1 ms)                                                  |
| Durability                      | Mechanical                              | Momentary operation: 2,000,000 operations min.<br>Alternate operation: 200,000 operations min. *1    |
|                                 | Electrical                              | 100,000 operations min. *1                                                                           |
| Electric shock protection class |                                         | Class II                                                                                             |
| PTI (tracking characteristic)   |                                         | 175                                                                                                  |
| Degree of contamination         |                                         | 3 (IEC947-5-1)                                                                                       |
| Weight                          |                                         | Approx. 10 g (in the case of a lighted DPDT switch with solder terminals)                            |
| Degree of protection            |                                         | IP40: A16, Oil-resistant IP66: A165 *3                                                               |
| Ambient operating temperature   |                                         | -10°C to 55°C (with no icing or condensation)                                                        |
| Ambient operating humidity      |                                         | 35% to 85%RH                                                                                         |
| Ambient storage temperature     |                                         | -25°C to 65°C (with no icing or condensation)                                                        |

\*1. Set and reset constitute one operation.

\*2. With LED and incandescent lamp not mounted.

\*3. Degree of protection from the front of the panel.

#### Super-bright LED

| Rated voltage | Rated current | Operating voltage | Internal limiting resistor                                  |
|---------------|---------------|-------------------|-------------------------------------------------------------|
| 5 VDC         | 8 mA          | 5 VDC ±5%         | Red, yellow, white: 300 Ω<br>Green, blue, pure white: 160 Ω |
| 12 VAC/VDC    |               | 12 VAC/VDC ±5%    | Red, yellow, white: 1 kΩ<br>Green, blue, pure white: 910 Ω  |
| 24 VAC/VDC    |               | 24 VAC/VDC ±5%    | 2.4 kΩ                                                      |

#### Incandescent Lamp

| Rated voltage | Rated current | Operating voltage |
|---------------|---------------|-------------------|
| 6 VAC/VDC     | 60 mA         | 5 VAC/VDC         |
| 14 VAC/VDC    | 40 mA         | 12 VAC/VDC        |
| 28 VAC/VDC    | 24 mA         | 24 VAC/VDC        |

#### Voltage-reduction Unit (LED Lamp)

| Rated voltage | Operating voltage              | Applicable lamp    |
|---------------|--------------------------------|--------------------|
| 110 VAC/VDC   | 100/110 VAC/VDC (90 to 121 V)  | A16-24DS□ LED Lamp |
| 220 VAC/VDC   | 200/220 VAC/VDC (180 to 242 V) |                    |

#### Screw-less Clamp

| Item                              | Screw-Less Clamp |                                                            |                     |                      |                      |
|-----------------------------------|------------------|------------------------------------------------------------|---------------------|----------------------|----------------------|
| Recommended wire size             |                  | 0.5 mm <sup>2</sup> twisted wire or 0.8 mm-dia. solid wire |                     |                      |                      |
| Usable wires and tensile strength | Twisted wire     | 0.3 mm <sup>2</sup>                                        | 0.5 mm <sup>2</sup> | 0.75 mm <sup>2</sup> | 1.25 mm <sup>2</sup> |
|                                   | Solid wire       | 0.5 mm dia.                                                | 0.8 mm dia.         | 1.0 mm dia.          | —                    |
|                                   | Tensile strength | 10 N                                                       | 20 N                | 30 N                 | 40 N                 |
| Length of exposed wire            |                  | 10 ±1mm                                                    |                     |                      |                      |
| Compliant standards               |                  | JIS C 2811 Terminal Blocks for Industrial Use              |                     |                      |                      |


#### Operating Characteristics

| Characteristics                    | Type | Pushbutton Switch |                    |
|------------------------------------|------|-------------------|--------------------|
|                                    |      | IP40              | Oil-resistant IP66 |
| Operating force (OF) max.          |      | 4.41 N            | 4.91 N             |
| Releasing force (RF) min.          |      | 0.29 N            |                    |
| Total travel (TT)                  |      | Approx. 3 mm      |                    |
| Pretravel (PT) max.                |      | 2.5 mm            |                    |
| Lock travel alternate (LTA) min. * |      | 0.5 mm            |                    |

\* Alternate operation models only.

## Nomenclature

### Model Structure

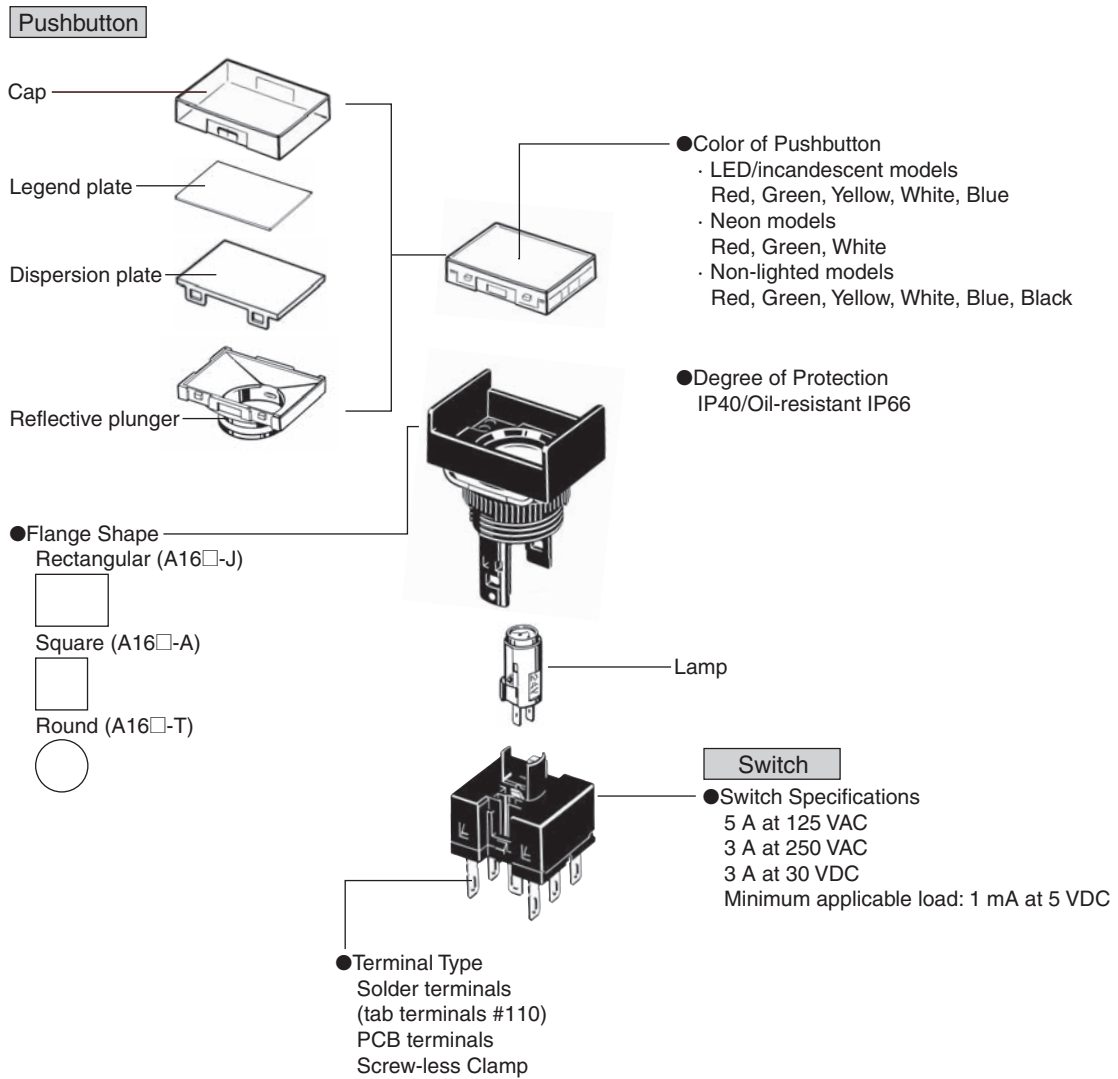

# Dimensions




• The Dimension shows 2-switch outputs. • The lamp terminal is also provided with non-lighted models.

(Unit: mm)


## Rectangular

A16□-J

Solder terminals (tab terminals #110)

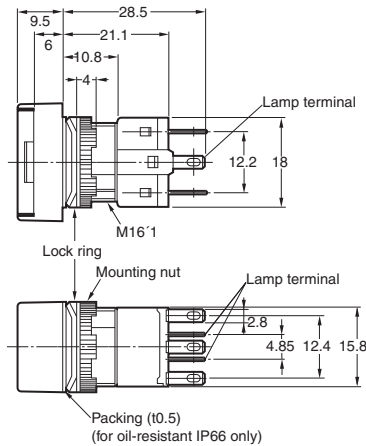




• See page 21 for panel cutouts




## Square

A16□-A

Solder terminals (tab terminals #110)

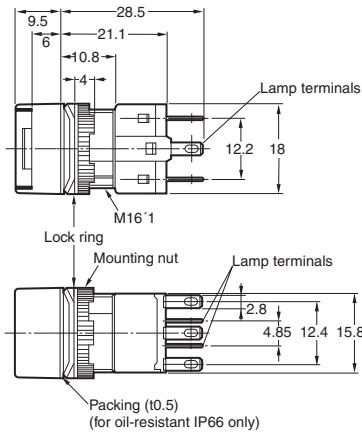




• See page 21 for panel cutouts




## Round

A16□-T

Solder terminals (tab terminals #110)

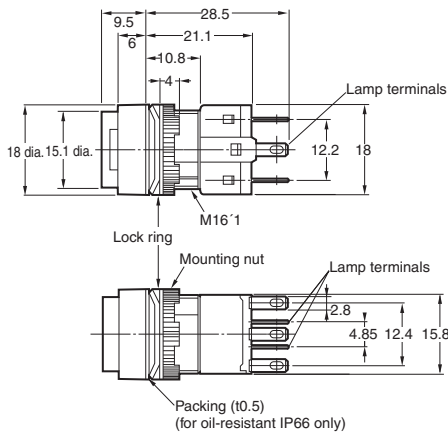

• See page 21 for panel cutouts









# Dimensions

## Accessories, Tools, and Components


### Extractor A3PJ-5080




### Legend Plates A16ZJ-520

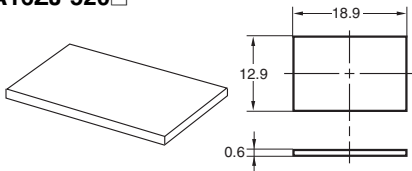


### A16ZA-520



### A16ZT-520



### Screw Fitting A16Z-3004



Note: 1. The panel is 0.6 mm thick.  
2. The panel is made of the materials listed in the following table.


| Color       | Degree of protection | Materials           |
|-------------|----------------------|---------------------|
| Milky       | IP40                 | Polyallylate resin  |
|             | IP66                 |                     |
| Transparent | IP40                 | Polycarbonate resin |
|             | IP66                 | Polyallylate resin  |

### Panel Plugs (Black Resin)



Select the Plug that fits the panel design and mount from the front of the Panel. Panel cutouts are the same as those for Switches.  
Protective structure: IP40  
Color: Black

| Rectangular           | Square                | Round                 |
|-----------------------|-----------------------|-----------------------|
| <b>A16ZJ-3003</b><br> | <b>A16ZA-3003</b><br> | <b>A16ZT-3003</b><br> |

### Lock Ring

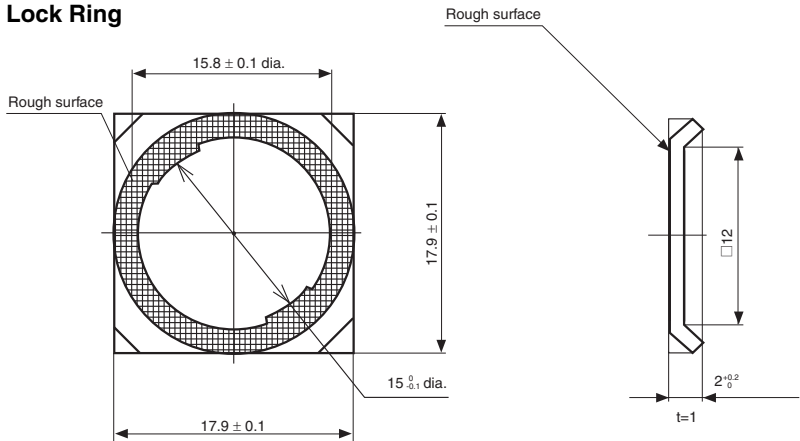

### Socket Unit Lamp Extractor A16Z-5080



# Dimensions

(Unit: mm)

## Panel Cutouts

### Solder Terminals and Screw-less Clamp Connectors

| Rectangular A16□-□J/M16□-□J | Square A16□-A/M16□-A<br>Round A16□-T/M16□-T |
|-----------------------------|---------------------------------------------|
| (Top View)                  | (Top View)                                  |
|                             |                                             |

- Note:
- Make sure the thickness of the mounting panel is between 0.5 and 3.2 mm. If, however, a Switch Guard or Dust Cover is used, the thickness of the mounting panel must be between 0.5 and 2 mm.
  - If the panel is to be finished with coating, etc., make sure that the panel meets the specified dimensions after coating.
  - Figures in parentheses are for Screw-less Clamp Connectors.

### PCB Terminals

| Rectangular A16□-J/M16□-J | Square A16□-A/M16□-A<br>Round A16□-T/M16□-T |
|---------------------------|---------------------------------------------|
| (Top View)                | (Top View)                                  |
|                           |                                             |

- Note:
- Ensure that the variation in the distance between the centers of neighboring mounting holes is less than  $\pm 0.1$  mm.
  - Make sure the thickness of the mounting panel is between 0.5 and 3.2 mm. If, however, a Switch Guard or Dust Cover is used, the thickness of the mounting panel must be between 0.5 and 2 mm.
  - If the panel is to be finished with coating, etc., make sure that the panel meets the specified dimensions after coating.

## Terminal Arrangement

Models without Reduced-voltage Lighting (Non-lighted Pushbutton Switches are also provided with lamp terminals.)



### Solder Terminals

| Lighted SPDT Switches                                                                                                         | Lighted DPDT Switches                                                                                                         |
|-------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| <p>Dimensions of Terminal Holes</p> <p>Terminal Arrangement (Bottom View)</p> <p>Note: The L+ is not shown on the Switch.</p> | <p>Dimensions of Terminal Holes</p> <p>Terminal Arrangement (Bottom View)</p> <p>Note: The L+ is not shown on the Switch.</p> |

## Dimensions

(Unit: mm)


### PCB Terminals (Lamp terminals are also present on non-lighted models.)
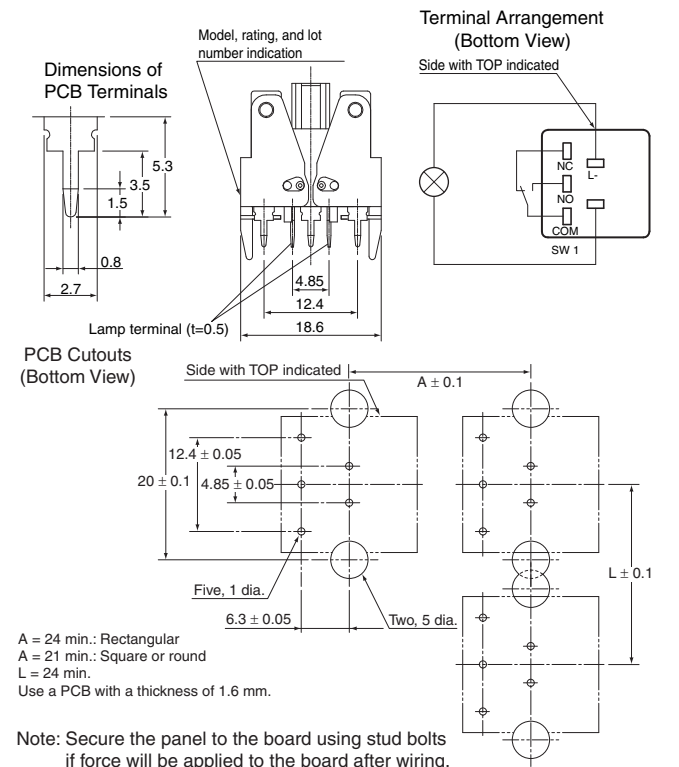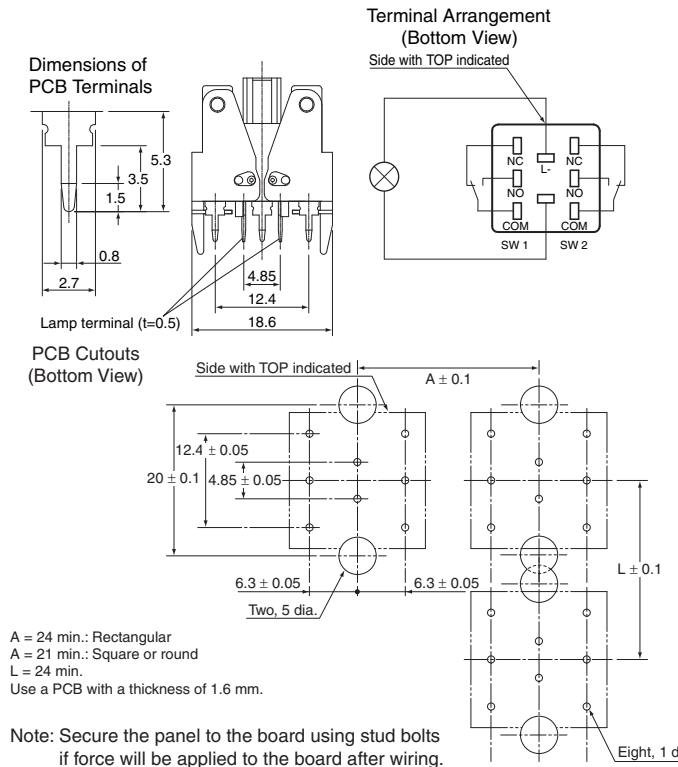
| Lighted SPDT Switches                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Lighted DPDT Switches                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>Model, rating, and lot number indication</p> <p>Dimensions of PCB Terminals</p> <p>Lamp terminal (t=0.5)</p> <p>Terminal Arrangement (Bottom View)</p> <p>Side with TOP indicated</p> <p>PCB Cutouts (Bottom View)</p> <p>Side with TOP indicated</p> <p>A ± 0.1</p> <p>12.4 ± 0.05</p> <p>4.85 ± 0.05</p> <p>6.3 ± 0.05</p> <p>20 ± 0.1</p> <p>Five, 1 dia.</p> <p>Two, 5 dia.</p> <p>L ± 0.1</p> <p>A = 24 min.: Rectangular<br/>A = 21 min.: Square or round<br/>L = 24 min.<br/>Use a PCB with a thickness of 1.6 mm.</p> <p>Note: Secure the panel to the board using stud bolts if force will be applied to the board after wiring.</p> |  <p>Model, rating, and lot number indication</p> <p>Dimensions of PCB Terminals</p> <p>Lamp terminal (t=0.5)</p> <p>Terminal Arrangement (Bottom View)</p> <p>Side with TOP indicated</p> <p>PCB Cutouts (Bottom View)</p> <p>Side with TOP indicated</p> <p>A ± 0.1</p> <p>12.4 ± 0.05</p> <p>4.85 ± 0.05</p> <p>6.3 ± 0.05</p> <p>20 ± 0.1</p> <p>Two, 5 dia.</p> <p>Eight, 1 d</p> <p>L ± 0.1</p> <p>A = 24 min.: Rectangular<br/>A = 21 min.: Square or round<br/>L = 24 min.<br/>Use a PCB with a thickness of 1.6 mm.</p> <p>Note: Secure the panel to the board using stud bolts if force will be applied to the board after wiring.</p> |

## Terminal Arrangement


### Voltage-reduction Lighting (Lamp terminals are also present on non-lighted models.)

#### Solder Terminals

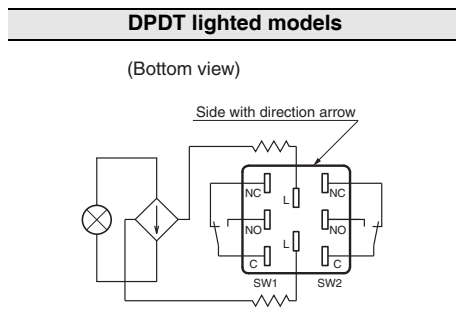

- The voltage-reduction circuit is built in.

#### Screw-Less Clamps

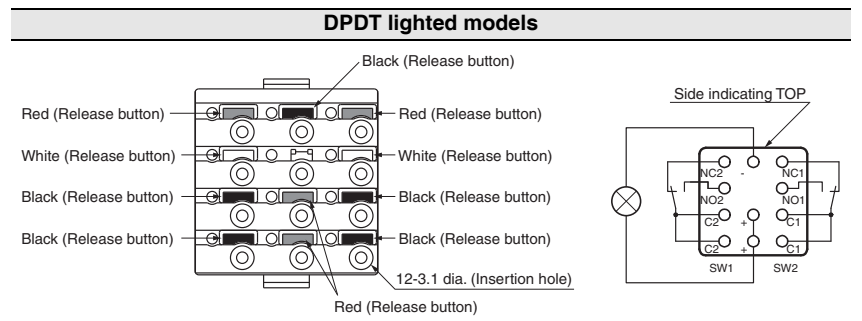


- Voltage-reduction lighting models with Screw-Less Clamps (A16L-□T1-2S, A16L-□T2-2S) incorporate voltage-reduction circuits.

# Dimensions




(Unit: mm)

## Accessory Dimensions Mounted Dimensions with Switch Guard Installed

### Rectangular A16ZJ-5050




Panel Cutout (Top View)






Note: This example is for when X is 4.5 mm.  
If X is not required, the Switches can be mounted with a minimum vertical installation pitch of 24 mm min.

### Square A16ZA-5050





Panel Cutout (Top View)




Note: This example is for when X is 4.5 mm.  
If X is not required, the Switches can be mounted with a minimum vertical installation pitch of 24 mm min.  
If PCB terminals are used, provide X must be 24 mm or larger.

## Dust Covers



### Rectangular A16ZJ-5060

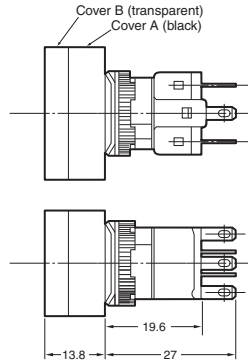


### Panel Cutouts

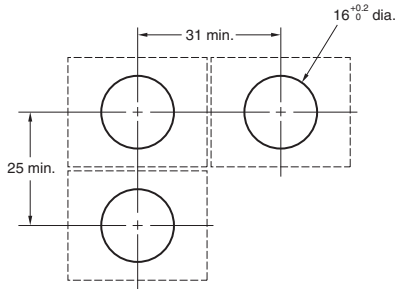



### Square A16ZA-5060




### Panel Cutouts



### Round A16ZT-5060



### Panel Cutouts



## Safety Precautions

### Refer to *Safety Precautions for All Pushbutton Switches/Indicators*.

#### ⚠ WARNING

Do not apply a voltage between the incandescent lamp and the terminal that is greater than the rated voltage. If the incandescent lamp is broken, the operating part may pop out.



Always turn OFF the power and wait for 10 minutes before replacing the incandescent lamp. If the lamp is replaced immediately after the power is turned OFF, the remaining heat may cause burns.



### Precautions for Correct Use

#### Mounting

- Always make sure that the power is turned OFF before mounting, removing, or wiring the Switch, or performing maintenance.
- Do not tighten the mounting nut more than necessary using tools such as pointed-nose pliers. Doing so will damage the mounting nut.  
The tightening torque is 0.29 to 0.49 N·m.

#### Wiring

- Solder terminals and quick-connect terminals (#110) are commonly used for terminals.
- Be sure to use electrical wires that are a size appropriate for the applied voltage and carry current (conductor size is 0.5 to 0.75 mm<sup>2</sup>). Perform soldering according to the conditions provided below. If the soldering is not properly performed, the lead wires will become detached, resulting in short-circuits.
  1. Hand soldering: 350°C, within 3 s
  2. Dip soldering: 350°C, within 3 s


Wait for one minute after soldering before exerting any external force on the solder.
- Use non-corrosive resin fluid as the flux.
- Make sure that the electric cord is wired so that it does not touch the Unit. If the electric cord touches the Unit, then electric wires with a heat resistance of 100°C min. must be used.
- After wiring the Switch, maintain an appropriate clearance and creepage distance.

#### Operating Environment

- This Switch is intended for indoor use only. Using the Switch outdoors will cause the Switch to fail. If IP40 models are used in locations subject to dust, metallic particles, or oil, be careful that none of these penetrates the Switch.
- The IP66 model is designed with a degree of protection so that it will not sustain damage if it is subjected to water from any direction to the front of the panel.
- Do not use the Switch submersed in oil or water, or in locations continuously subject to splashes of oil or water. Doing so may result in oil or water entering the Switch.

#### Using the Microload

- Insert a contact protection circuit, if necessary, to prevent the reduction of life expectancy due to extreme wear on the contacts caused by loads where inrush current occurs when the contact is opened and closed.
- The A16 allows both a standard load (125 V at 5A, 250 V at 3 A) and a microload. If a standard load is applied, however, the microload area cannot be used. If the microload area is used with a standard load, the contact surface will become rough, and the opening and closing of the contact for a microload may become unreliable.
- The minimum applicable load is the N-level reference value. This value indicates the malfunction reference level for the reliability level of 60% ( $\lambda$  60) (conforming to JIS C5003).  
The equation,  $\lambda$  60 =  $0.5 \times 10^{-6}$ /operations indicates that the estimated malfunction rate is less than 1/2,000,000 operations with a reliability level of 60%.

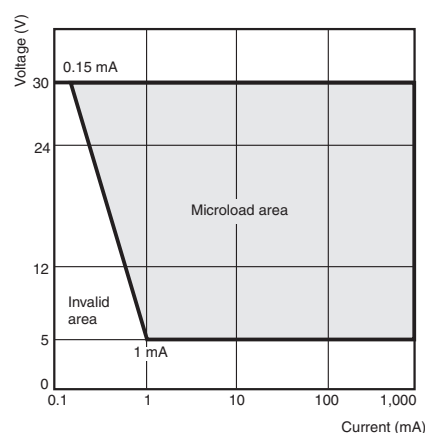

#### LED


- The LED current-limiting resistor is built-in, so external resistance is not required. LEDs with a rated voltage of 12 or 24 V have a built-in diode bridge and no polarity. LEDs with a rated voltage of 5 V have polarity.

| Rated voltage | Internal limiting resistor                                                |
|---------------|---------------------------------------------------------------------------|
| 5 VDC         | Red, yellow, white: 300 $\Omega$<br>Green, blue, pure white: 160 $\Omega$ |
| 12 VAC/VDC    | Red, yellow, white: 1 k $\Omega$<br>Green, blue, pure white: 910 $\Omega$ |
| 24 VAC/VDC    | 2.4 k $\Omega$                                                            |

#### Others

- The oil-resistant IP66 uses NBR rubber and is resistant to general cutting oil and cooling oil. Some particular oils cannot be used with the oil-resistant IP66, however, so contact your OMRON representative for details.
- The durability of the Switch depends in the switching conditions. Always test the Switch under actual application conditions to confirm applicability and use the Switch only for the number of switching operations that will not affect performance. Continuing to use the Switch with degraded performance will eventually result insulation faults between circuits, burning of the Switch, or other failures.
- If the panel is to be finished with coating, etc., make sure that the panel meets the specified dimensions after the coating.
- Do not subject the Switch to extreme shock or vibration. Doing so will cause malfunctions and damage to the Switch.
- Do not let sharp objects come into contact with the Switches that are made of resin. Doing so will damage the Switches, causing scratches on the outside of the operating parts, and malfunction. When handling the Switches, do not throw or drop them.

- Rubber is used inside IP66 models. Do not allow the rubber to become scratched or foreign matter to become attached to the rubber. Scratches and foreign matter will degrade the waterproofing, and the Switch may fail operate correctly.

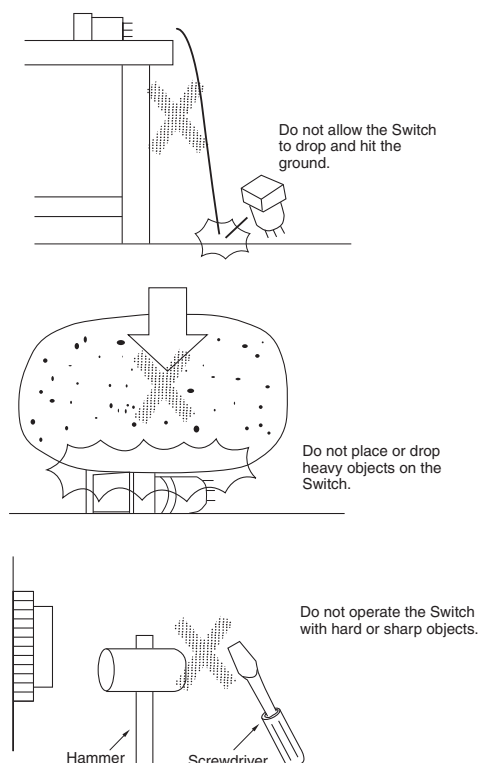

## Screw-less Clamp Wiring Procedure

### Connecting Wires


1. Strip the wires for 10 mm (allowable range:  $10 \pm 1$  mm).
2. If braided wire is used, twist the wire to straighten it out.
3. Insert the wire into the insertion hole while pressing the release button at the side of the hole. (Using a precision screwdriver is recommended.)
4. Let go of the release button to lock the wire into place.
5. After locking, pull on the wire gently to confirm that it is securely locked.

### Removing Wires

1. Remove wires by pulling them while pressing the release button.
- Note: When reusing wires that have already been locked one, cut off the end of the wire and strip the wire again before using.

## Precautions

1. The mounting panel thickness must be 0.5 to 3.2 mm.
2. The mounting ring must be tightened to a torque 0.29 to 0.49 N·m.
3. The procedure for making the mounting hole for the screw-less clamp connector is described on page 21. A mounting dimension of at least 33 mm is required, however, because the Switch is removed with the screw-less clamp connector mounted to the panel. If Switches are mounted side-by-side separated by less than the specified distance, it may not be possible to remove the Switch.
4. Be sure to mount the Case to the Switch with the correct orientation. Mount with the dimple on the Case facing in the same direction as the side of the Switch with the direction arrow or the word TOP.

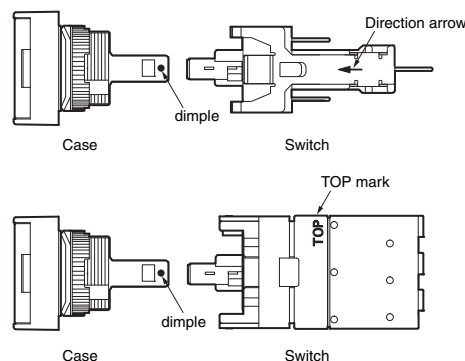


5. Bend the end of the wire if braided wire is used with the screw-less clamp connector.
6. When wiring, insert the wire until it comes into contact with something. After wiring is completed, pull on the wires to confirm that they are connected securely.
7. After wiring, ensure that continuous pressure is not applied to the terminals.
8. Refer to internal connection diagrams and confirm the terminal numbers before wiring.

## Panel Mounting

After mounting the Pushbutton Unit to the panel, snap in the Switch from the back of the panel.


### Mounting to the Panel

- Insert the Pushbutton Unit into the front of the panel, and fix the lock ring and mounting nut from the terminal side.
- Make sure that the lock ring is aligned with the thread of the Case and the edge of the lock ring is touching the panel.
- Tighten the mounting nuts to a torque of 0.29 to 0.49 N·m.

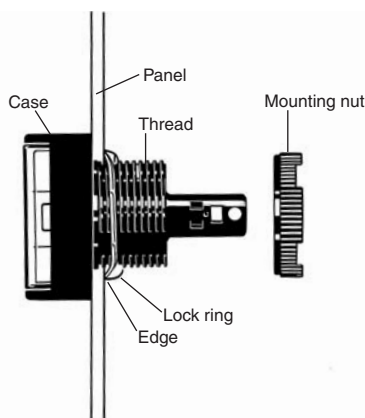


### Mounting the Switch Unit

- Snap on the Switch Unit to the Pushbutton Unit.
- Make sure that the Switch Unit has the correct orientation when snapping it onto the Case. Align the dimple on the Case with the groove between the case guards on the NC terminal side of the Switch Unit in the way shown below, and push the Switch Unit into the Case until it clicks into place. Confirm that the Switch Unit is securely in place before using.

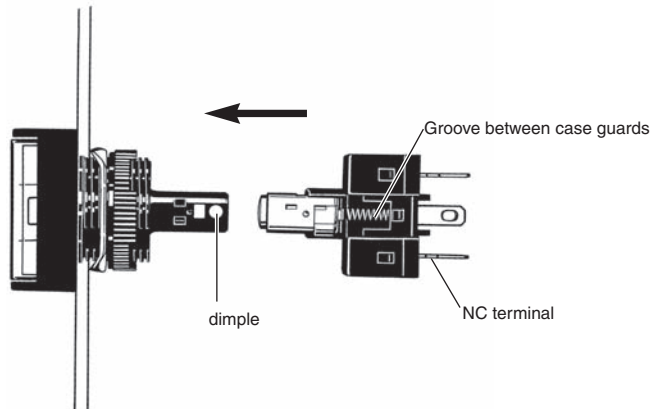

## Removing the Switch Unit

- Grip the part between the Switch holder of the Case and the Switch Unit using the A16Z-5080 Extractor, and pull to remove the Switch Unit.

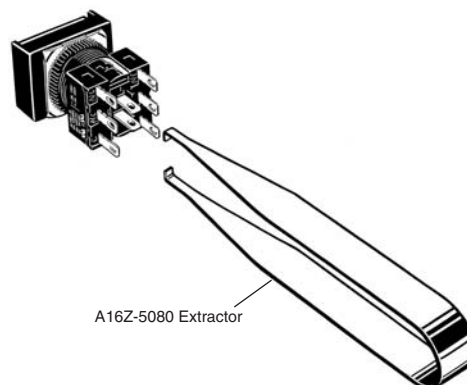

Note: Refer to page 21 for PCB terminals.

## Engraving


### Engraving the Legend Plate

- The characters must not be engraved deeper than 0.4 mm.
- Apply an alcohol-based paint coating, such as melamine, phthalate, or acrylic resin paint coating.


## Mounting and Replacing the Pushbutton

### Removing and Mounting the Pushbutton

- (1) Remove the Pushbutton as shown in the following diagram. If the Pushbutton cannot be removed by hand, use the A3PJ-5080 Extractor.

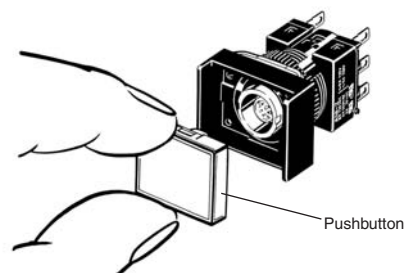


- (2) When mounting the Operation Unit to the Case, press the entire surface of the Operation Unit to surface A of the Case as shown in the following diagram.





## Removing the Lamp

### (1) Removing from the Pushbutton End

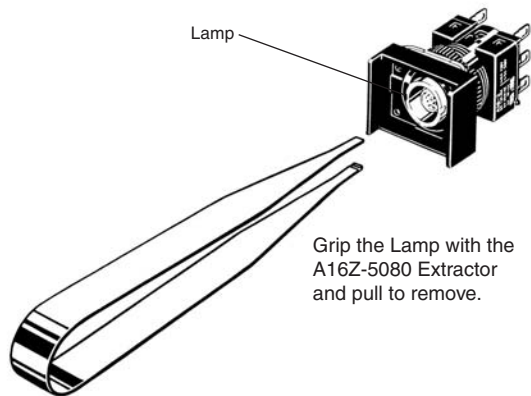


### (2) Removing from the Switch End

The Lamp can be removed by hand once the Switch is removed using the A16Z-5080 Extractor.


## Installing the Lamp

- When mounting the Lamp, make sure it is facing the direction shown in the following diagram. Insert the Lamp while matching the protruding part of the Lamp and the small guides on the outer surface of the Case.

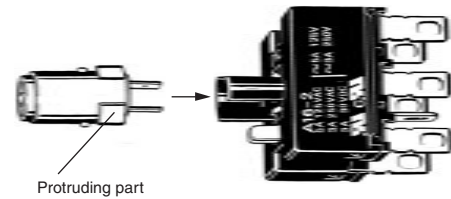

- The Lamp can be mounted from the Pushbutton end by using the A16Z-5080 Extractor. The lamp can be mounted by following the opposite procedure for removing the Lamp.


## Mounting the A16Z Dust Cover

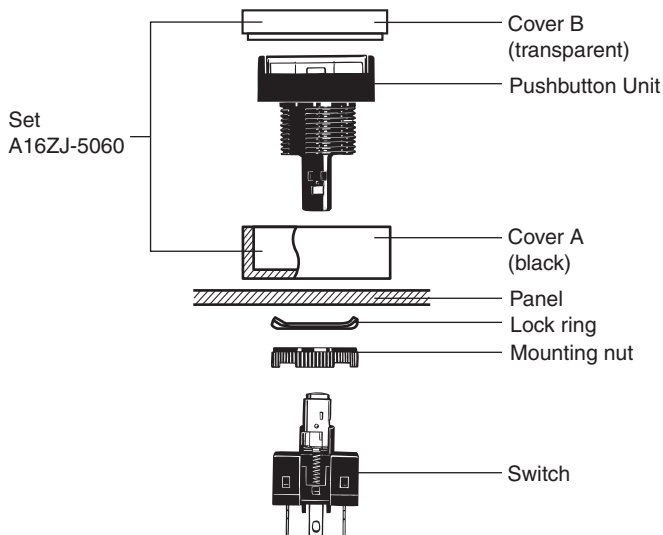

- Separate the Dust Cover into 2 parts: cover A and cover B.
- Insert the Case (Pushbutton Unit) into cover A.
- Mount these parts together onto the panel.
- From the back of the panel, mount the lock ring and secure with the mounting nut.
- Insert cover B into cover A. Ensure that the entire perimeter of cover B is securely attached to cover A by pressing in different directions.
- Mount the Switch to the Case.

Note: Recommended panel thickness: 0.5 to 2 mm.

## Mounting the A16Z Switch Guard

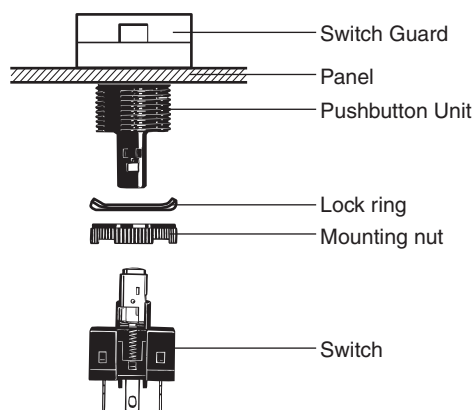

- Insert the Case (Pushbutton Unit) into the Switch Guard.
- Mount these parts together onto the panel.
- From the back of the panel, mount the lock ring and secure with the mounting nut.
- Mount the Switch to the Case.

Note: Recommended panel thickness: 0.5 to 2 mm.

## Terms and Conditions Agreement

### Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

### Warranties.

(a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.

(b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

### Limitation on Liability: Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

### Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

### Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

### Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

### Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

### Errors and Omissions.

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.