

6

5

4

3

2

1

MATERIAL AND FINISH

Insulator: Polycarbonate, UL-94V-0 rated
Contacts: Brass

ELECTRICAL SPECIFICATIONS:

Current rating: 10 A/15 A
Voltage rating: 250 VAC
Insulation resistance: 100 Mohm min. at 500 VDC
Dielectric withstanding voltage: 2000 VAC for one minute

ORDERING CODE:

43R03-1 1 2 3

1) COLOR

1 = BLACK
2 = GRAY

2) TERMINAL OPTIONS

1 = .187(4.8) WITH Ø1.4
2 = .250(6.3) WITH Ø1.65






3) ELECTRICAL CIRCUIT CONFIGURATION

1 = 10A 250V 70°C

15A 250V 70°C
2+GROUND

2 = 10A 250V 120°C

15A 250V 120°C
2+GROUND

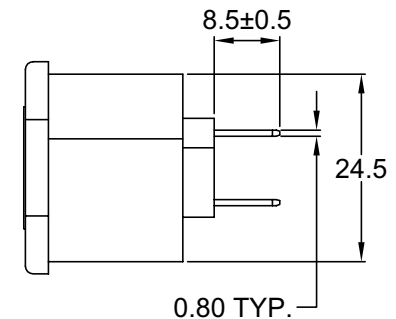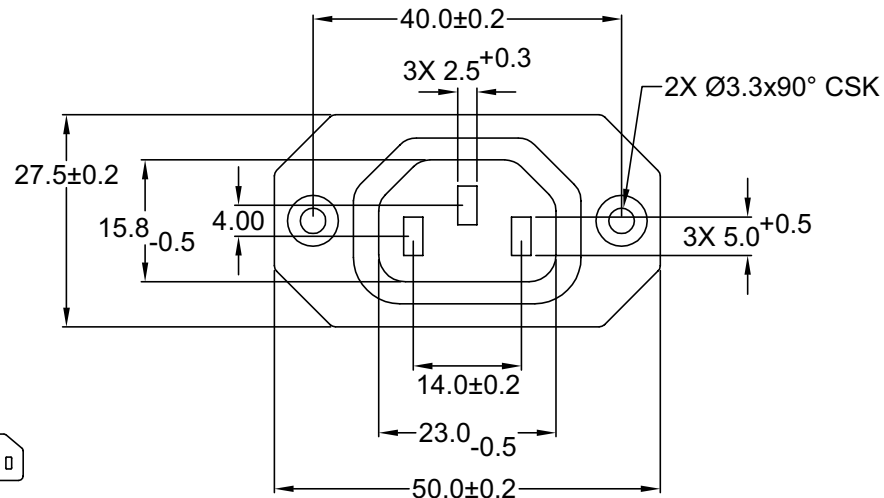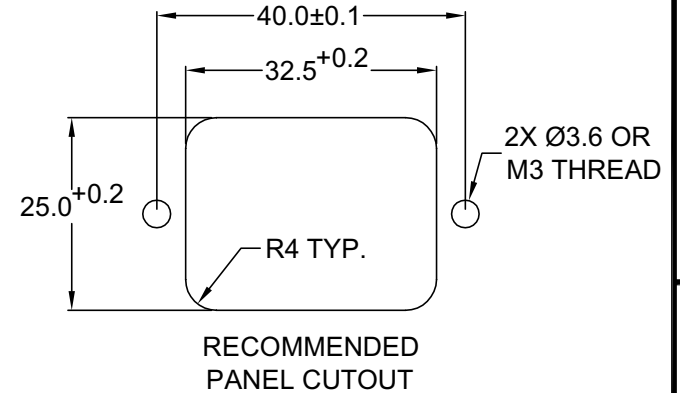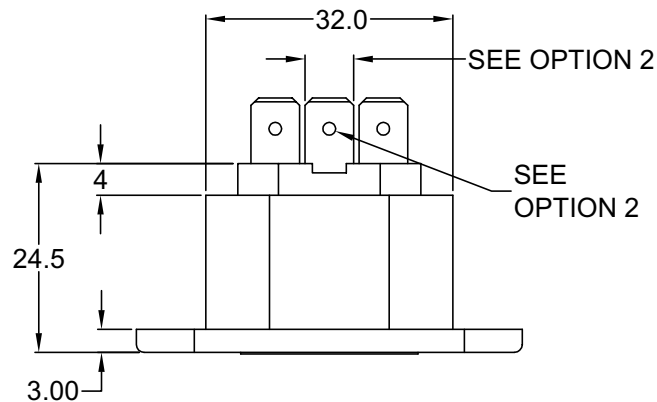

REVISIONS

CHANGE

DATE

REV

CHNG CHECK APPR

TOLERANCE
UNLESS OTHERWISE SPECIFIED

X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY GQ DATE: 10/05/01
CHECK BY TD DATE: 10/09/01
APPR BY PB DATE: 10/09/01

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 10A/15A IEC 60320 APPL. OUTLET; QC
TERMINALS; SIDE FLANGE, PANEL MOUNT

PART #: 43R03-1XXX

SHEET
1 of 1

SIZE: A
SCALE: NTS
ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV:

6

5

4

3

2

1

6

5

4

3

2

1

MATERIAL AND FINISH

Insulator: Polycarbonate, UL-94V-0 rated
Contacts: Brass

ELECTRICAL SPECIFICATIONS:

Current rating: 10 A/15 A
Voltage rating: 250 VAC
Insulation resistance: 100 Mohm min. at 500 VDC
Dielectric withstanding voltage: 2000 VAC for one minute

ORDERING CODE:

43R03-2 $\frac{1}{1} \frac{2}{2} \frac{3}{3}$

1) COLOR

1 = BLACK
2 = GRAY

2) TERMINAL OPTIONS

1 = .187(4.8) WITH Ø1.4
2 = .250(6.3) WITH Ø1.65

3) ELECTRICAL CIRCUIT CONFIGURATION

1 = 10A 250V 70°C







15A 250V 70°C
2+GROUND



2 = 10A 250V 120°C

15A 250V 120°C
2+GROUND

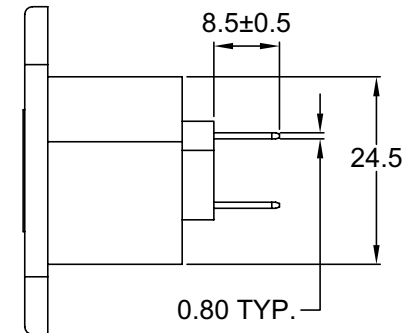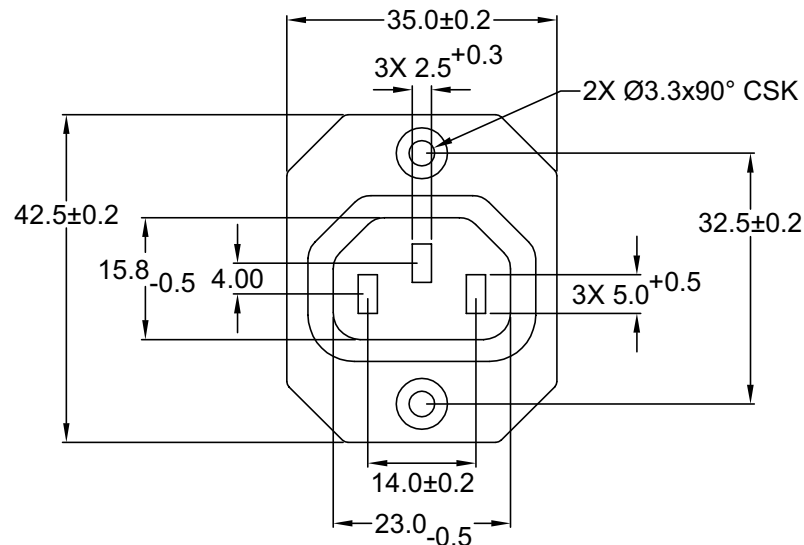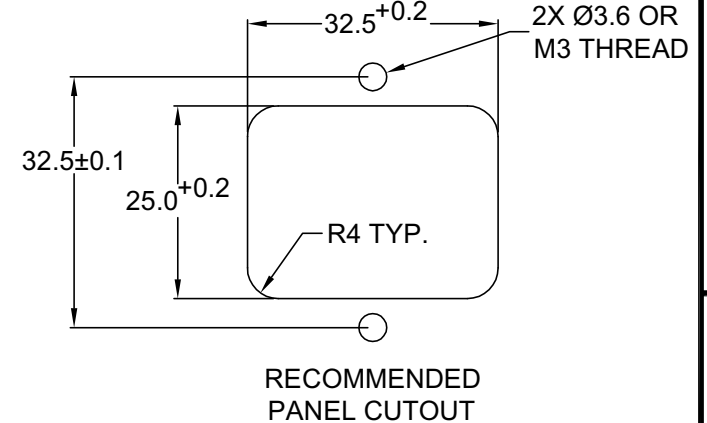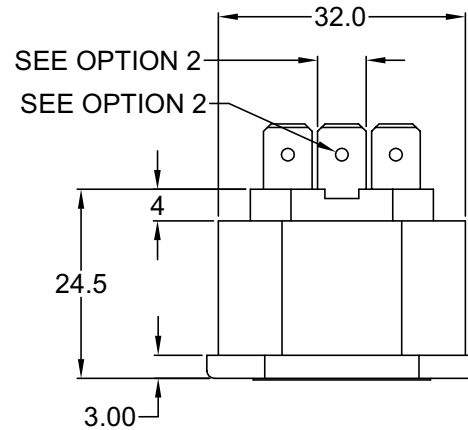

REVISIONS

REV DATE CHANGE CHNG CHECK APPR

TOLERANCE UNLESS OTHERWISE SPECIFIED

X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY GQ DATE: 10/05/01
CHECK BY TD DATE: 10/10/01
APPR BY PB DATE: 10/10/01

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 10A/15A IEC 60320 APPL. OUTLET; QC
TERMINALS; CROSS FLANGE, PANEL MOUNT

PART #: 43R03-2XXX

SHEET
1 of 1

SIZE: A
SCALE: NTS
ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV:

6

5

4

3

2

1

6

5

4

3

2

1

MATERIAL AND FINISH

Insulator: Polycarbonate, UL-94V-0 rated
Contacts: Brass

ELECTRICAL SPECIFICATIONS:

Current rating: 10 A/15 A
Voltage rating: 250 VAC
Insulation resistance: 100 Mohm min. at 500 VDC
Dielectric withstanding voltage: 2000 VAC for one minute

ORDERING CODE:

43R03-3

1	2	3	4
---	---	---	---

1) COLOR

1 = BLACK
2 = GRAY

2) TERMINAL OPTIONS

1 = .187(4.8) WITH Ø1.4
2 = .250(6.3) WITH Ø1.65

3) ELECTRICAL CIRCUIT CONFIGURATION

1 = 10A 250V 70°C





15A 250V 70°C
2+GROUND

2 = 10A 250V 120°C

15A 250V 120°C
2+GROUND



3) PANEL THICKNESS

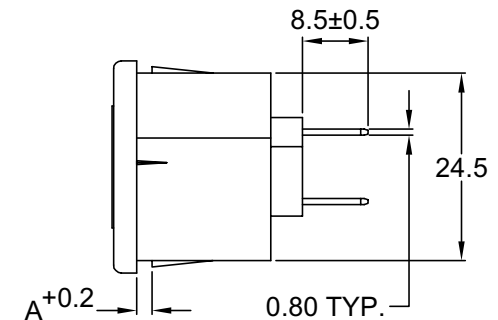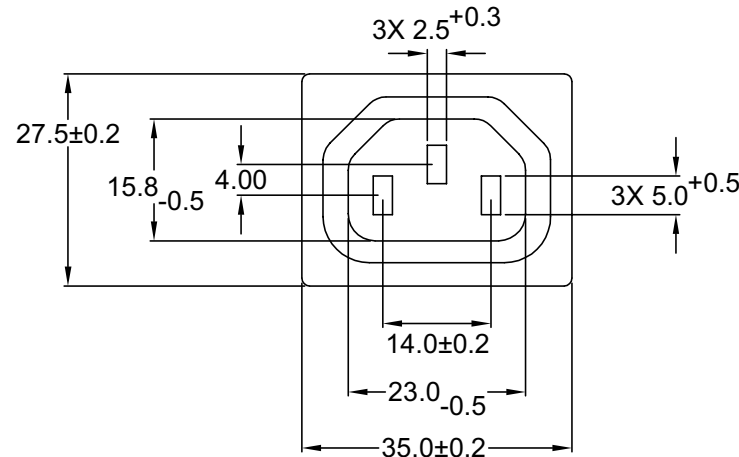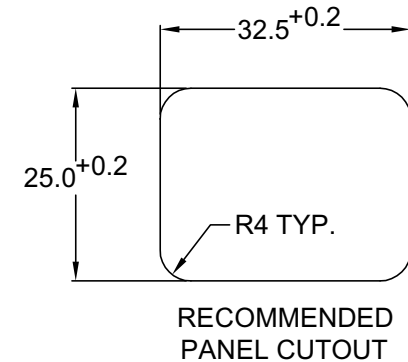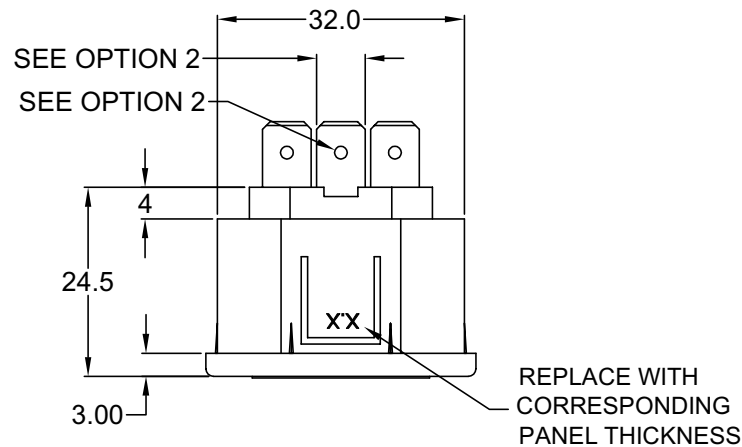

P/N	A	MAX. PANEL THICKNESS
43R03-3XXX-150	1.5	1.5
43R03-3XXX-200	2.0	2.0
43R03-3XXX-250	2.5	2.5

ADDITIONAL PANEL THICKNESS
AVAILABLE ON REQUEST

TOLERANCE
UNLESS OTHERWISE SPECIFIED

X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY	GQ	DATE:	10/05/01
CHECK BY	TD	DATE:	10/09/01
APPR BY	PB	DATE:	10/09/01

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 10A/15A IEC 60320 APPL. OUTLET; QC
TERMINALS; SNAP-IN, PANEL MOUNT

PART #: **43R03-3XXX-XXX**

SHEET
1 of 1

SIZE: A
SCALE: NTS
ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV:

REV	DATE	CHANGE	CHK	APPR

6

5

4

3

2

1