


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	2025.10.08	
/	N/A		/	/	/

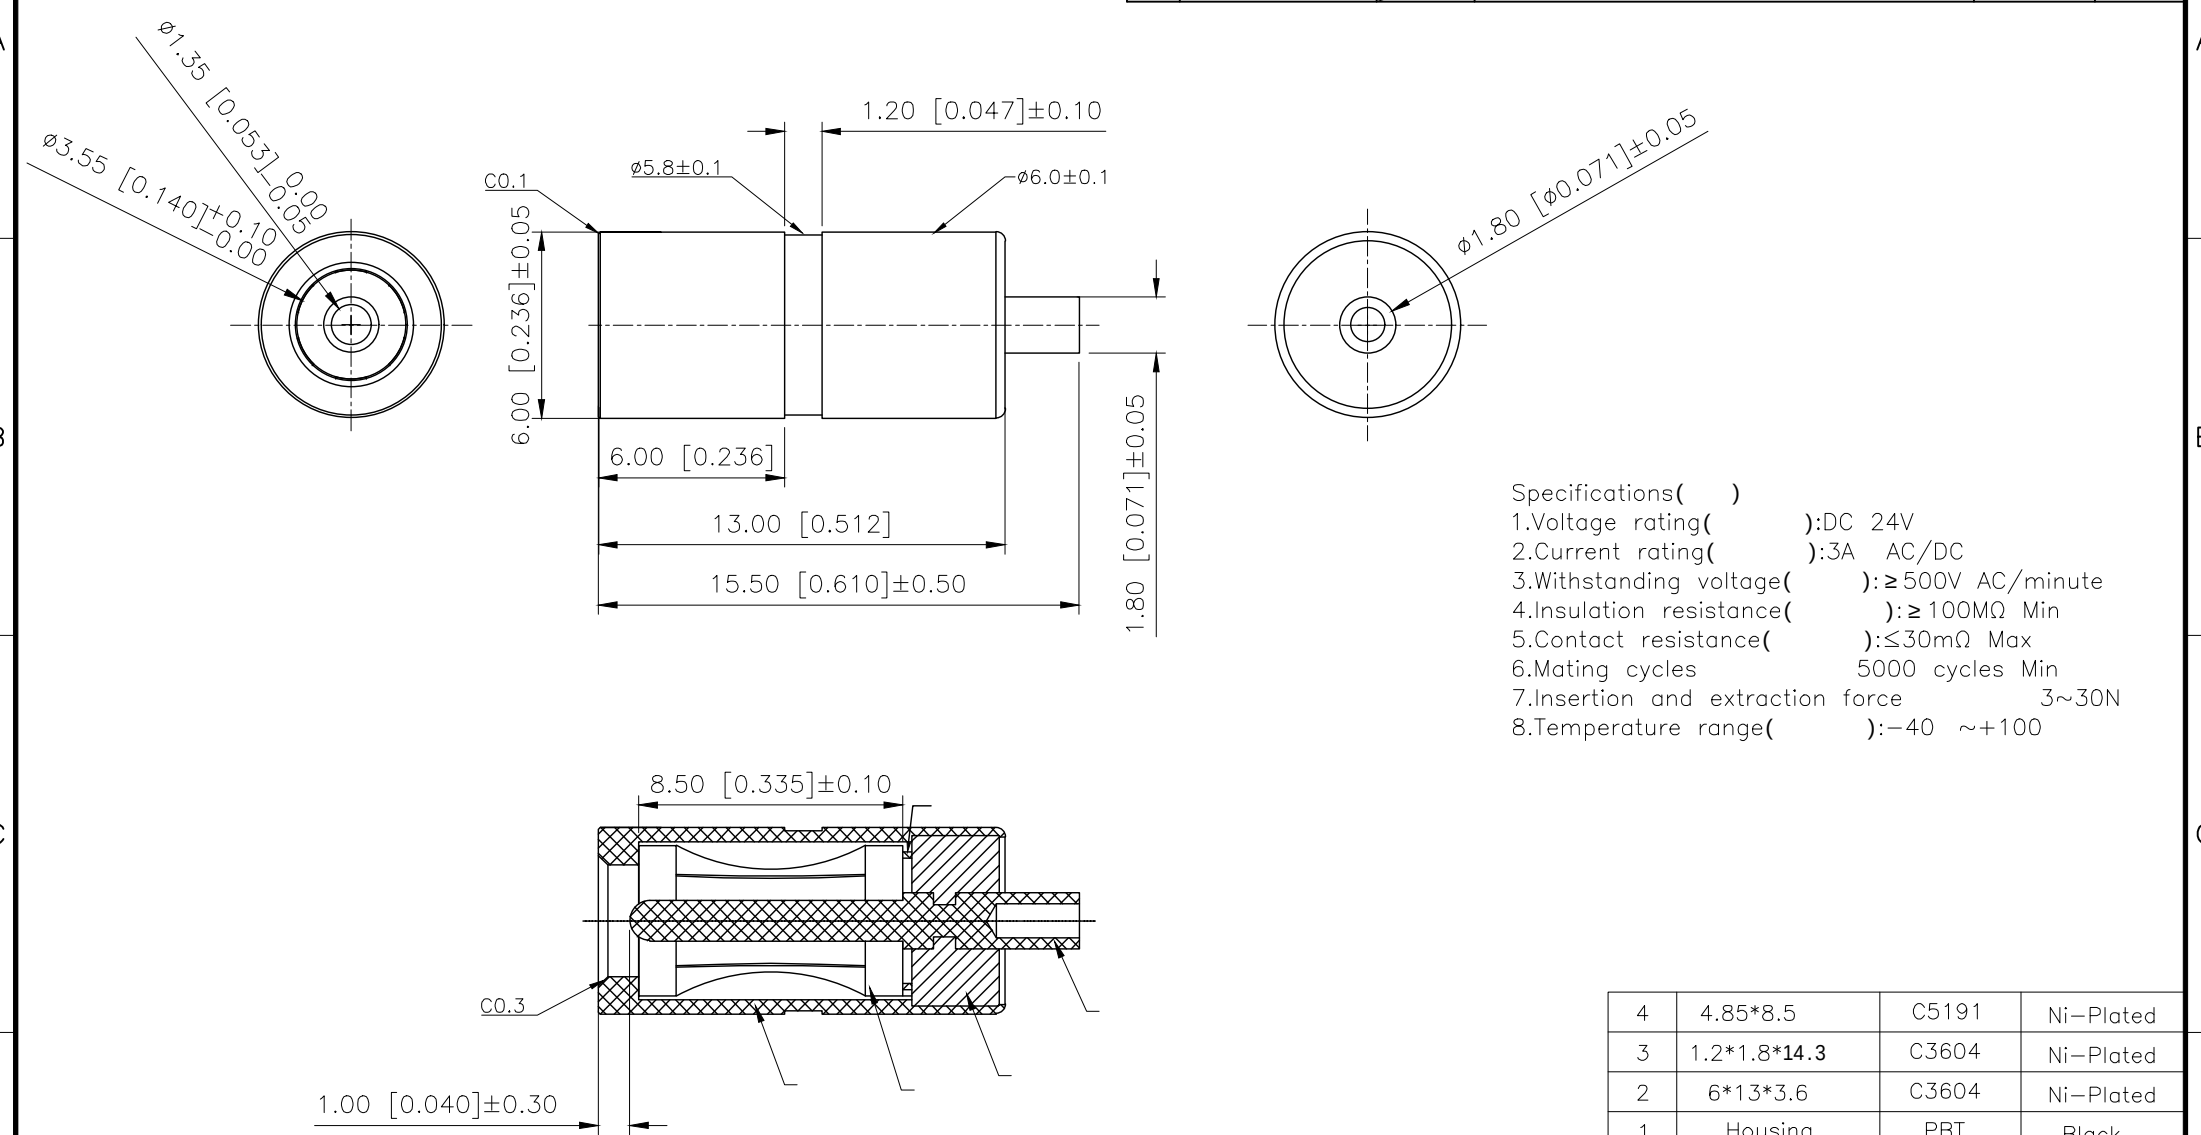

- Specifications()
- 1.Voltage rating():DC 24V
 - 2.Current rating():3A AC/DC
 - 3.Withstanding voltage():≥500V AC/minute
 - 4.Insulation resistance():≥100MΩ Min
 - 5.Contact resistance():≤30mΩ Max
 - 6.Mating cycles 5000 cycles Min
 - 7.Insertion and extraction force 3~30N
 - 8.Temperature range():-40 ~+100

4	4.85*8.5	C5191	Ni-Plated
3	1.2*1.8*14.3	C3604	Ni-Plated
2	6*13*3.6	C3604	Ni-Plated
1	Housing	PBT	Black
NO	PRODUCT NAME	MATERIAL	REMARK

AuGLAR	±5°		DESIGN		VIEW: 	MODEL TYPE: DC POWER JACK		
X.	±0.40		CHECKED		UNIT: mm/in	PART NO.: DC-351-5A-1.35		
X.x	±0.30		APPROVED		SIZE: A4	DWG NO.:		
X.xx	±0.20							
X.xxx	±0.15							
UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED				SCALE N/A	PAGE 1/1	REVISION A0