


由Autodesk 教育版产品制作

由Autodesk 教育版产品制作

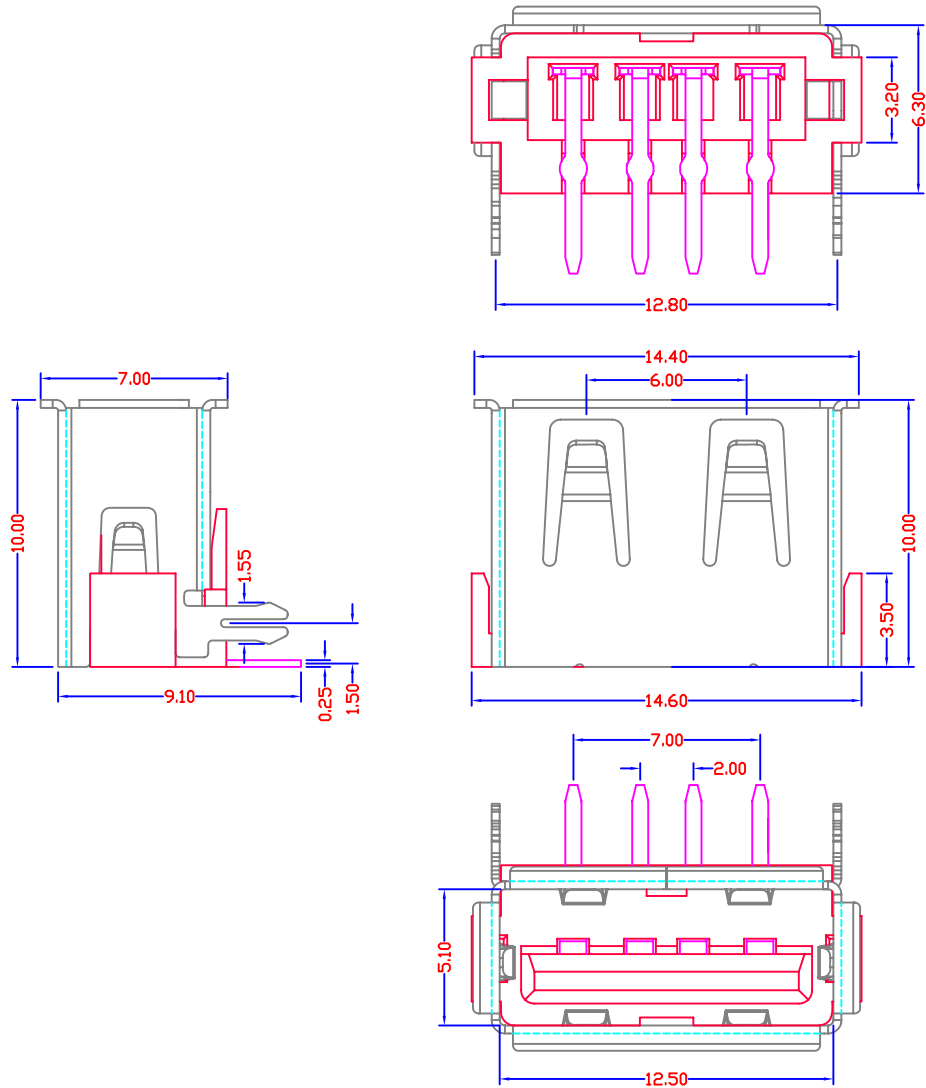


Specification:

1.Electrical Characteristics:
Dielectric Withstanding Voltage: AC 500V/1MINUTE.
Insulation Resistance: 1000 MΩ/Min.
Contact Resistance: 30 mΩ\ Max.

2.Mechanical Characteristics:
INSERTION FORCE: 30N(3.06Kgf) MAX
EXTRACTION FORCE: 10~30N(1.02~3.06Kgf)
Durability:1500cycles.EXTRACTION FORCE:10~30N(1.02~3.06Kgf)

3. Material:
Terminal: Phosphor Bronze, C5191/C2680R-EH T=0.25
Plating: Gold 0.76 um Min plating over 1.27 um Min Nickel underplate, 2.54 um Min Sn selective plating on solder tail;
Shell: Bronze, C2680R-H =0.30mm
Plating: Nickel underplate 2.54 um Min;
Housing: LCP Black

4.Environmental:
Operating Temperature: 0°C to +85°C.

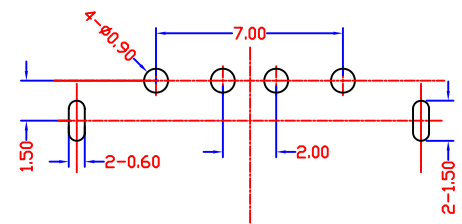

RECOMMENDED P.C.B LAYOUT

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	908-262A1021D10100
X.	±0.15	X.	±5.°	比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NAME	AF10.0A款后两脚无边铜壳PBT黑胶6.3DI
.XX	±0.10	.XX	±2.°	日期 DATE	2012.04.1	核准 APPD	黄国荣	角法 VIEW	版本 VER
.XX	±0.05	.XX	±1.°						
.XXX	±0.03	.XXX	±0.5°						