
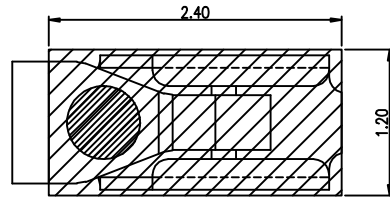
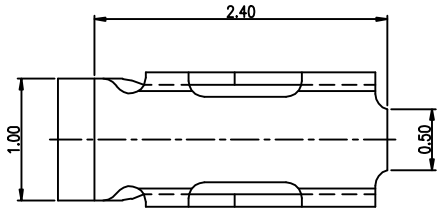

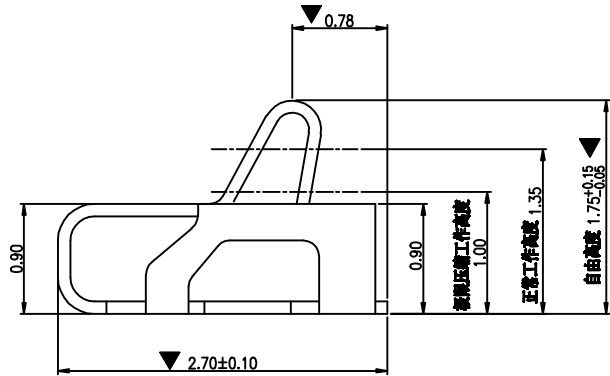


Kinghelm®

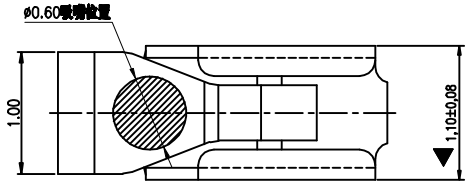

P.C.B LAYOUT
TOLERANCE:±0.05

Rev.	ECN	Number	Description	Date	Drawn	Checkd	Approved

技术要求:

- 1.材质:不锈钢SUS301,T=0.10±0.005;
- 2.端子锡脚焊接面和接触面不可有毛边,其他部位毛边最大0.03mm;
- 3.扭曲:45°/1000mm,拱形 5mm/1000mm;
- 4.标示有“▼”符号的为重点控制和检验尺寸;
- 5.未标注之R MAX R0.13;
- 6.电镀须满足24小时盐雾测试;
- 7.寿命测试>2万次,产品弹力要求在60gf~80gf之间
- 8.镍底50 80u"min,产品外表面镀锡80~100U"MIN

深圳市金航标电子有限公司
www.kinghelm.com.cn
型号: KH-2711175-TP
0755-28190160

GENERAL TOLERANCE	
XX. ±0.50	
X. ±0.35	X.° ±2.0°
.X ±0.25	.X.° ±1.0°
.XX ±0.15	.XX.° ±0.5°

SCALE:	1:1
UNIT:	mm
SIZE:	A4

DRAWN	DATE
CHECK	DATE
APPROVE	DATE

DWG. NO.
PARTS NO.(INTENDED USE)

TITLE
客户图
RF Antenna Spring,SMT, L2.7*W1.2*H1.75mm

REV.
A
SHEET
1/1