

Pitch:2.00x2.00mm(0.079 " x0.079 ")

Female Header Dual Rows Straight Base 7.20H Type

ELETE
—Professional Connecting Solutions—

HFLDS72


Specifications

Current Rating:2.0 Ampere
Insulation Resistance:1000MΩ Min
Dielectric Withstanding:500V AC
Contact Resistance:20mΩ Max
Operating Temperature:-40℃ to +105℃

Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester,UL 94V-0
LCP/NL6T


All material RoHS&Reach Compliant
Halogen-free is available

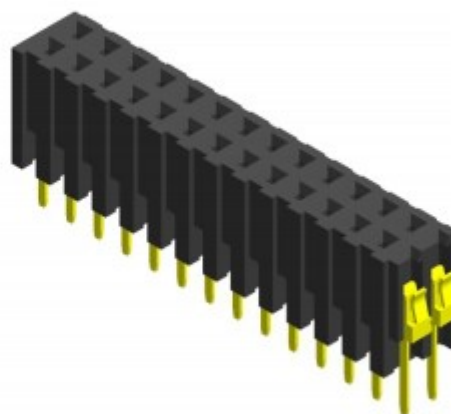

Mating with



HMLDSXX



HMLDSHXX



HMLDMHXX





HMLDR43




HMLDMXX

Recommended
P.C.Board
Hole Layout





HMLDS43



HMLDPXX



HMLDRXX

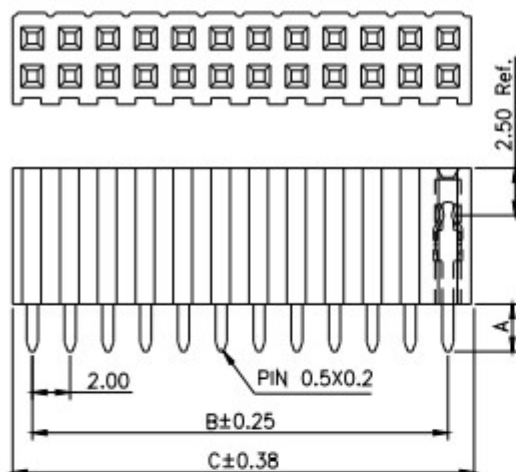

PS:Suggested Mating Pin Length:4.0~7.0mm

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	B	C		B	C		B	C		B	C
02	2.00	4.50	12	22.00	24.50	22	42.00	44.50	32	62.00	64.50
03	4.00	6.50	13	24.00	26.50	23	44.00	46.50	33	64.00	66.50
04	6.00	8.50	14	26.00	28.50	24	46.00	48.50	34	66.00	68.50
05	8.00	10.50	15	28.00	30.50	25	48.00	50.50	35	68.00	70.50
06	10.00	12.50	16	30.00	32.50	26	50.00	52.50	36	70.00	72.50
07	12.00	14.50	17	32.00	34.50	27	52.00	54.50	37	72.00	74.50
08	14.00	16.50	18	34.00	36.50	28	54.00	56.50	38	74.00	76.50
09	16.00	18.50	19	36.00	38.50	29	56.00	58.50	39	76.00	78.50
10	18.00	20.50	20	38.00	40.50	30	58.00	60.50	40	78.00	80.50
11	20.00	22.50	21	40.00	42.50	31	60.00	62.50			