
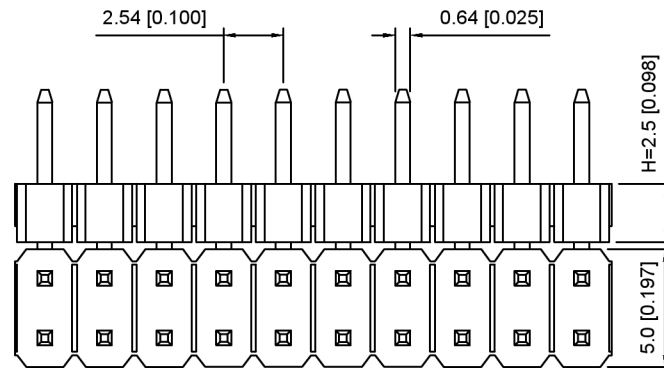
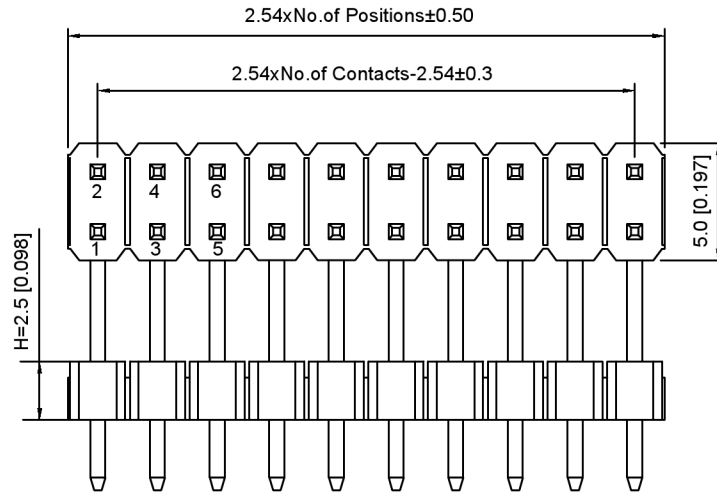


P.C.B LAYOUT

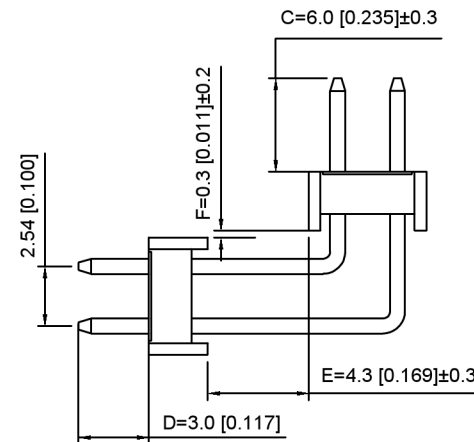

Specifications:

规格:
Voltage rating:250V AC/DC
额定电压: 250V AC/DC
Current rating:3A AC/DC
额定电流: 3A AC/DC
Withstanding voltage:1000V AC/minute
耐受电压: 1000V AC/分钟
Temperature range:-40℃~+105℃
温度范围: -40℃~+105℃
Insulation resistance:≥1000MΩ
绝缘电阻: ≥1000MΩ
Contact resistance:≤20mΩ
接触电阻: ≤20mΩ
Material:PA6T UL94V-0
材质: PA6T UL94V-0
Plating Category:1U"Gold
镀层: 1U"Gold
Wave soldering temperature:255±5℃, 10S
波峰焊温度: 255±5℃, 10S

X6522 W R - 2xXX H - C60 D30 - E43 F03
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- 1.Series No.
- 2.Category:W-Water
- 3.Welding Board Angle:R-Straight 90°
- 4.Row No -Pin No:2xXX-2x02P-2x40P
- 5.Plastic height: H=2.5mm
- 6.Pin length: C=6.0mm
- 7.Pin length:D=3.0mm
- 8.Pin length:E=4.3mm
- 9.Pin lengthF=0.3mm

X6522WR-2xXXH-C60D30-E43F03	PA6T	Brass	1U"Gold	X6521F
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKB Female

广东星坤科技股份有限公司	
ΔX	日期
ΔX	
ΔX	
MARK	DESCRIPTION
文件工程章	

					ANGLAR	±5°
					L≤ 4	±0.2
					4<L≤ 16	±0.3
					16<L≤ 63	±0.4
					L> 63	±0.5
					UNSPECIFIED TOLERANCES	
					REVISIONS	
					DATE	REVISED
					APPROVED	
					www.helloxkb.com	www.helloxkb.cn
					www.xk-dg.cn	

DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	2.54mm BTB Connector
CHKD		UNIT: mm/in	PART NO.: X6522WR-2xXXH-C60D30-E43F06
APPD		SIZE: A4	DWG NO.: X-X6522WR-2xXXH-C60D30-E43F06
XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT
			SHEET
			REVISION
			1/1
			A0