| | Interface module for direct wiring (2 conductors) 16 channels with integrated status indication and disconnection, 20-pole connector acc. to DIN 41651 | Interface module for direct wiring (3 conductors) 16 channels with integrated status indication, 20-pole connector acc. to DIN 41651 |
|---|---|---|
| |  | |
| | 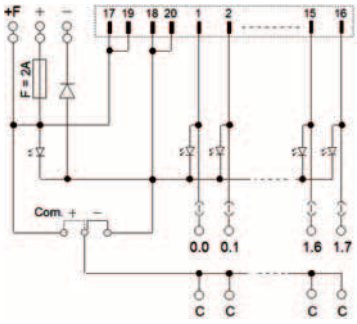 | 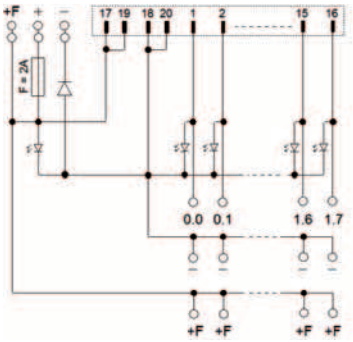 |

| Description | Item No. | Pack. Unit | Item No. | Pack. Unit |
|---|---|---|---|---|
| **Interface module, for DIN 35 rail** | **704-2044** | 1 | **704-2054** | 1 |
| **Technical Data** | | | | |
| Operating voltage | 24 V DC (± 10 %) | | 24 V DC (± 10 %) | |
| Max. continuous current | 1 A per channel | | 1 A per channel | |
| Max. total current | 2 A | | 2 A | |
| Fuse | 2 A | | 2 A | |
| Status indication | LED green : Channel; | | LED green : Channel; | |
| | LED yellow : Power supply | | LED yellow : Power supply | |
| Power consumption LED | 5 mA | | 5 mA | |
| Nominal voltage to EN 60664-1 | 50 V / 0.8 kV / 2 | | 50 V / 0.8 kV / 2 | |
| Ambient operating temperature | -20 °C ... +50 °C | | -20 °C ... +50 °C | |
| Storage temperature | -40 °C ... +70 °C | | -40 °C ... +70 °C | |
| Dimensions incl. mounting carrier | | | | |
| (mm) W x H x L | 99 x 85 x 50 | | 85 x 85 x 63 | |
| | Height from upper-edge of DIN 35 rail | | Height from upper-edge of DIN 35 rail | |
| Wire connection | Inpu: 20-pole connector acc. to DIN 41651 | | Inpu: 20-pole connector acc. to DIN 41651 | |
| | Output: CAGE CLAMP® | | Output: CAGE CLAMP® | |
| Cross sections | 0.08 mm² ... 2.5 mm² / AWG 28 ... 12 | | 0.08 mm² ... 2.5 mm² / AWG 28 ... 12 | |
| Strip length | 5 ... 6 mm / 0.22 in | | 5 ... 6 mm / 0.22 in | |


Downloaded from Arrow.com.