

Actuator

17-040350

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/17-040350>

Your product:



17-040350 Actuator

FRONT

Reflector:	Metal, polished chromium-plated, domed
Front dimension:	Ø 9,5 mm
Front form:	round

MOUNTING

Design:	raised
Mounting cut-out:	Ø 8 mm

OPERATING-/INDICATION PART

Illumination colour:	Red
-----------------------------	-----

ELECTRICAL CHARACTERISTICS

Operation current:	20 mA $\pm$ 15 %
Operating voltage:	24 V DC
Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector
Lumi. Intensity:	80 mcd

MECHANICAL CHARATERISTIC

Tightening torque:	Fixing nut max. 0.2 Nm
Terminal:	Plug-in terminal, 2.8 x 0.8 mm
Weight:	0.005 kg

AMBIENT CONDITION


Operating temperature:	– 20 °C ... + 60 °C
Storage temperature:	– 25 °C ... + 80 °C
IP Protection:	IP40 front side, IP65 front side, according to IEC 60529

CERTIFICATE


Approbations:	UL
Conformities:	2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)

OTHER


Kind of illumination:	Single-LED
Hints:	Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.
Short Description:	Actuator, Ø 8 mm, Ø 9,5 mm, round, Plug-in terminal, 2.8 x 0.8 mm, Red
Mounting cut-outs:	

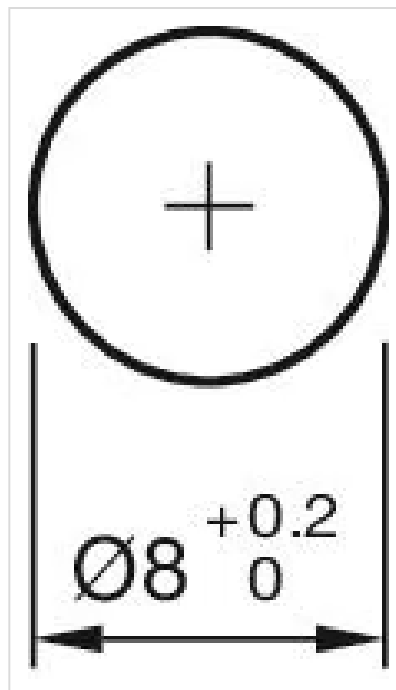

Wiring diagrams:

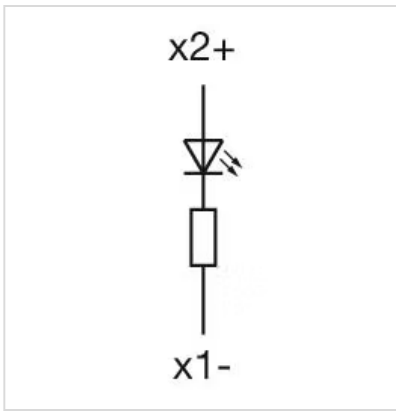

Dimension drawings:

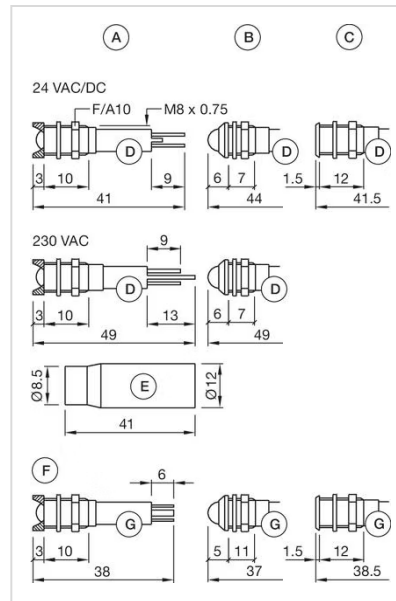

- A = interior
- B = exterior
- C = superflat
- D = Plug-in terminal 2.8 mm x 0.8 mm
- E = Multi-colour
- F = Protection tube
- G = Plug-in terminal 2.0 mm x 0.5 mm