

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		图面升级整理图面	2025.06.16	阿树
A2	N/A	②X3	产品尺寸及材质变更	2025.10.17	阿树

A

B

C







D

A

B

C

D

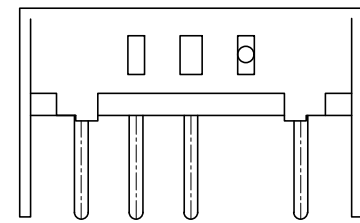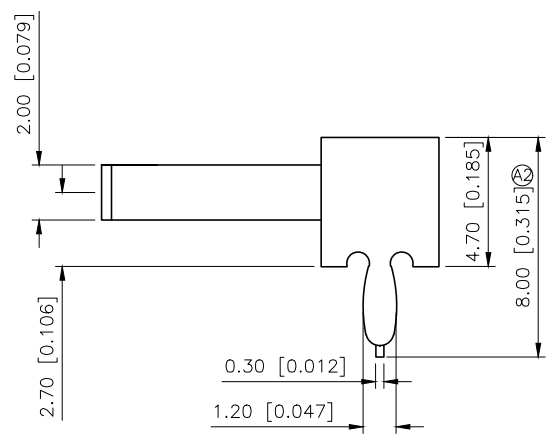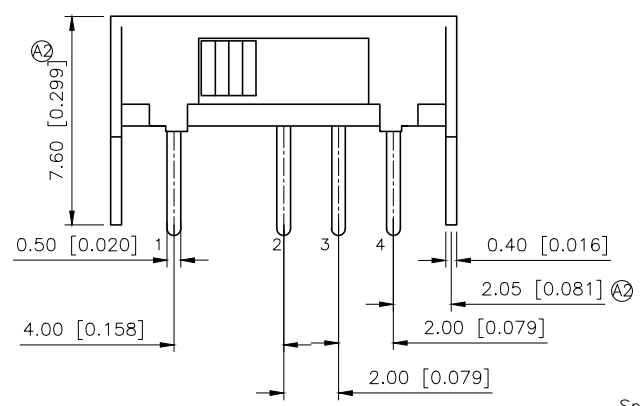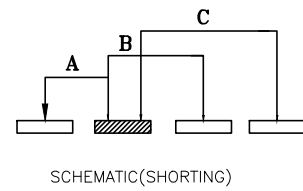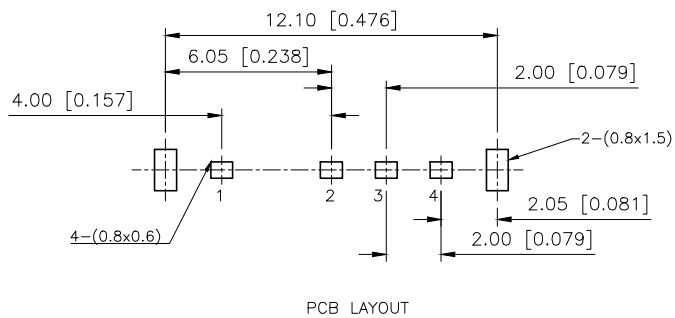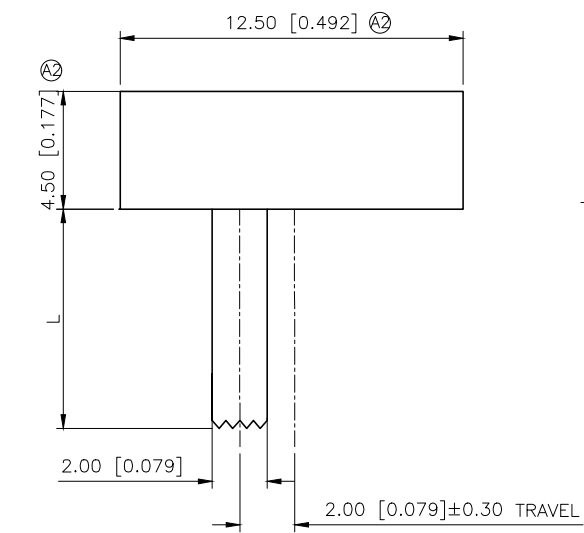


SK13D07L8B

L(mm)	Colour
2~12	B:Black
	R:Red

- Specifications (规格):
- Voltage rating (额定电压): DC 50V
 - Current rating (额定电流): 0.3A AC/DC
 - Withstanding voltage (耐压值): $\geq 500V$ AC/minute
 - Insulation resistance (绝缘电阻): $\geq 100M\Omega$ Min
 - Contact resistance (接触电阻): $\leq 30m\Omega$ Max
 - Mating cycles (使用寿命): 10000 cycles Min
 - Operating force (操作力): T1-T2: 250 ± 100 T2-T3: 300 ± 100
 - Temperature range (使用温度): $-25^{\circ}C \sim +85^{\circ}C$

6	H piece	1	Phosphor bronze	Natural
5	Contact piece	1	Phosphor bronze	ag Plated
4	Terminal	4	Brass	ag Plated
3	Base	1	KB Cold Rolled Sheet	Yellow
2	Shell	1	Sus	Electric
1	Plastic	1	POM	Black
ITEM	PAPT NAME	QTY	MATERIAL	FINISHING

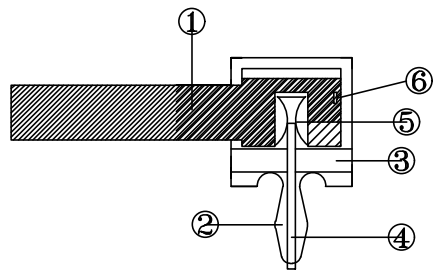

AuGLAR	$\pm 5^{\circ}$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	SLIDE SWITCH
CHECKED		UNIT:	mm/in	PART NO.:	SK13D07L8B
APPROVED		SIZE:	A4	DWG NO.:	X-SK13D07L8B