
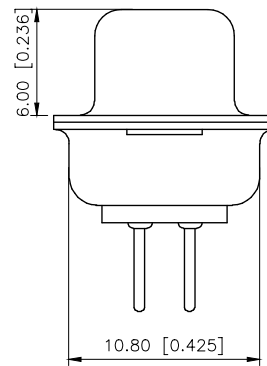
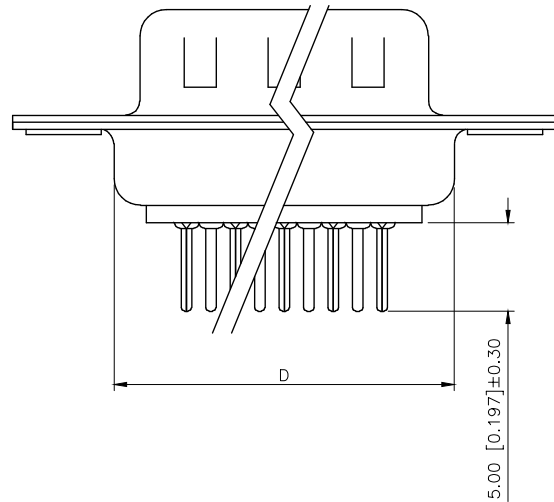
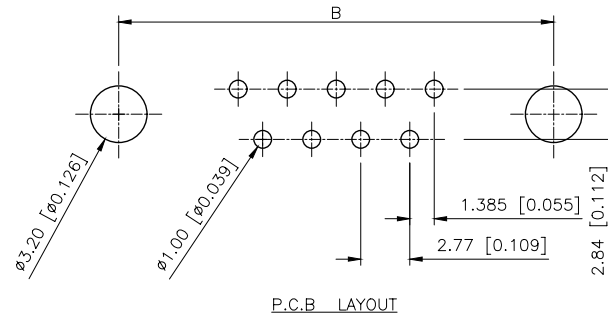


| REVISIONS |         |          |                 |            |        |
|-----------|---------|----------|-----------------|------------|--------|
| REV.      | ECN NO. | LOCATION | DESCRIPTION     | DATE       | DESIGN |
| A0        | N/A     |          | INITIAL RELEASE | /          | /      |
| A1        | N/A     |          | 图面升级整理图面        | 2025.05.22 | 阿树     |

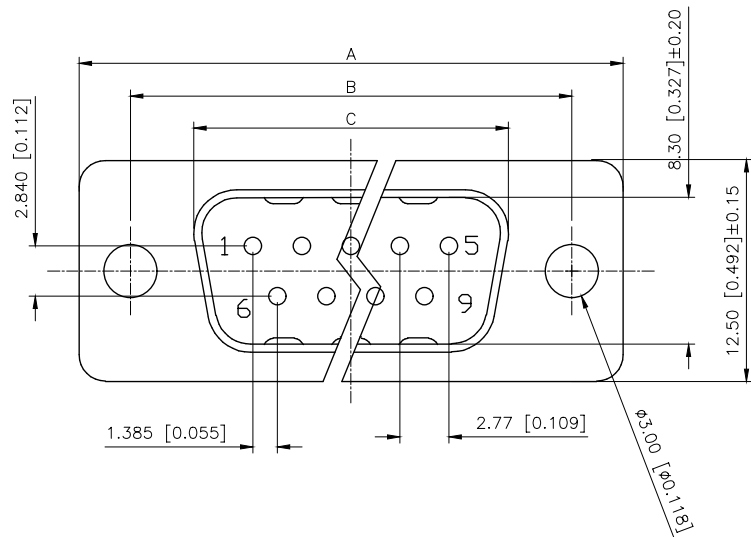

#### Specifications:

##### 规格:

- 1.Voltage rating:250VAC/DC  
额定电压: 250V AC/DC
- 2.Current rating:3A(T) / 5A(C) AC/DC  
额定电流: 3A(T) / 5A(C) AC/DC
- 3.Withstanding voltage:500V AC/minute  
耐受电压: ≥500V AC/分钟
- 4.Temperature range: -55℃~+105℃  
温度范围: -55℃~+105℃
- 5.Insulation resistance:1000MΩMIN  
绝缘电阻: ≥1000MΩ
- 6.Contact resistance:30mΩMax  
接触电阻: ≥30mΩ

##### Material:

##### 材料:

- 7.Rubber core:PBT UL94V-0  
胶芯: PBT UL94V-0
  - 8.The iron shell:SPCC Nivkel Plating/Tin Plating/Gold Plating  
铁壳: SPCC,镀镍/镀锡/镀金
- B、成品不能有弯针, R角不一致等不良。

#### PART NO.:

X02 25 W I Z W 5  
① ② ③ ④ ⑤ ⑥ ⑦

##### ①Series NO.

②Row No.Pin No.XX-09;15;25;37

③Welding Board Angle :W-Male

④T: Tradutional C: Car-pin

⑤Planting Categoty: 1:1U' 2:2U' 3:3U' 4:5U' 5:15U' 6:30U

⑥Color:B-BLACK W-White BL-Blue

⑦1:TYPE-1; 2:TYPE-2; 5:TYPE-5; 7:TYPE-7

| NUMBER OF POSITIONS | DIMENSION |        |        |        |
|---------------------|-----------|--------|--------|--------|
|                     | A±0.25    | B±0.13 | C±0.38 | D±0.25 |
| 9                   | 30.80     | 24.99  | 18.00  | 19.28  |
| 15                  | 39.20     | 33.32  | 26.50  | 27.51  |
| 25                  | 53.05     | 47.04  | 40.00  | 41.28  |
| 37                  | 69.40     | 63.50  | 56.60  | 57.71  |

| 铆合方式      | TYPE-1:铆合 | TYPE-2:前铆实心螺母 | TYPE-7:后铆鱼叉           | TYPE-5:铆鱼叉锁螺丝 |
|-----------|-----------|---------------|-----------------------|---------------|
| 图示        |           |               |                       |               |
| DESIGN    | 阿树        | VIEW:         | MODEL TYPE: D-SUB     |               |
| CHECKED   |           | UNIT: mm/in   | PART NO.: X0225WT7W5  |               |
| APPROVED  |           | SIZE: A4      | DWG NO.: X-X0225WT7W5 |               |
| SCALE N/A |           |               | PAGE 1/1              | REVISION A1   |

|                        |       |
|------------------------|-------|
| AuGLAR                 | ±5°   |
| X.                     | ±0.40 |
| X.x                    | ±0.30 |
| X.xx                   | ±0.20 |
| X.xxx                  | ±0.15 |
| UNSPECIFIED TOLERANCES |       |



XKB INDUSTRIAL PRECISION CO.,LIMITED