
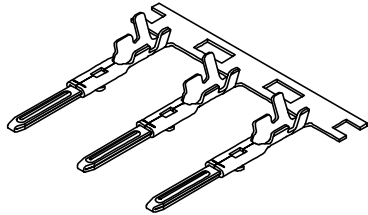

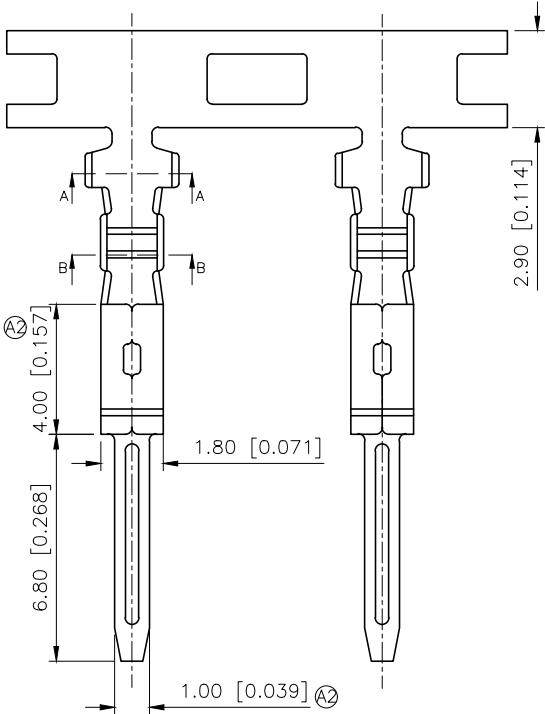



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		图面升级整理图面	2025.03.01	阿树
A2	N/A	②X8	产品尺寸及电器性能变更	2025.09.22	阿树

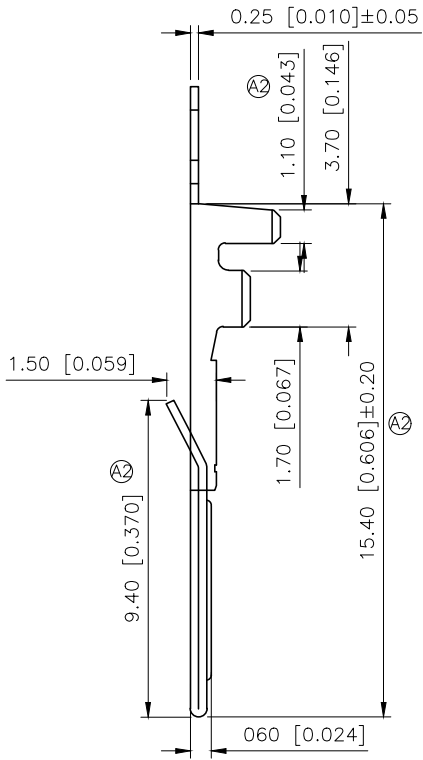

3D图示(参考)

规格 Specifications:
额定电压 Votage rating:250V AC/DC
额定电流 Current rating:3A AC/DC
耐电压 Withstanding voltage:1000V AC/minute
温度区间 Temperature range:-40℃~+105℃
绝缘电阻 Insulation resistance:≥1000MΩ
接触电阻 Contact resistance:≤20mΩ

PART NO.:

X2521 I M-P SN-G
① ② ③ ④ ⑤ ⑥

- ①Series Number.
②Category: T-terminal
③Welding Board Angle: M-Male
④Material: P-Phosphor bronze
⑤Plating Category:SN-Bright Tin Plating
⑥G:mating-G

X2521TM-PSN-G	Phosphor Bronze	AWG#22-28	X2521HF
PART NO	Material	Wire Range	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 2.50mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X2521TM-PSN-G
APPROVED		SIZE: A4	DWG NO.: