


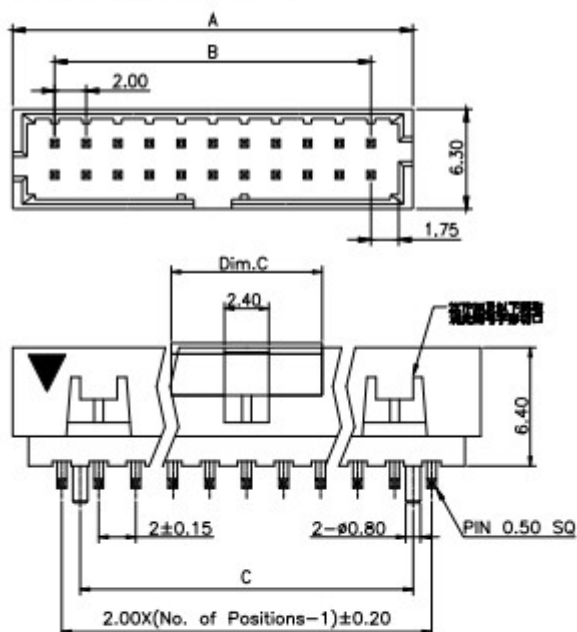




ELETE
—Professional Connecting Solution—
BXLDM03 Series

Current Rating:2.0 Ampere
Insulation Resistance:1000MΩ Min
Dielectric Withstanding:500V AC
Contact Resistance:20mΩ Max
Operating Temperature:-40℃ to +105℃

Contact Material: Brass
Insulation Material: Polyester,UL 94V-0
LCP/NL6T



No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B	C		A	B	C		A	B	C		A	B	C
04	10.65	6.00	4.00	10	22.65	18.00	16.00	16	34.65	30.00	28.00	22	46.65	42.00	40.00
05	12.65	8.00	6.00	11	24.65	20.00	18.00	17	36.65	32.00	30.00	23	48.65	44.00	42.00
06	14.65	10.00	8.00	12	26.65	22.00	20.00	18	38.65	34.00	32.00	24	50.65	46.00	44.00
07	16.65	12.00	10.00	13	28.65	24.00	22.00	19	40.65	36.00	34.00	25	52.65	48.00	46.00
08	18.65	14.00	12.00	14	30.65	26.00	24.00	20	42.65	38.00	36.00				
09	20.65	16.00	14.00	15	32.65	28.00	26.00	21	44.65	40.00	38.00				