


1

2

3


4

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.07.01	阿树

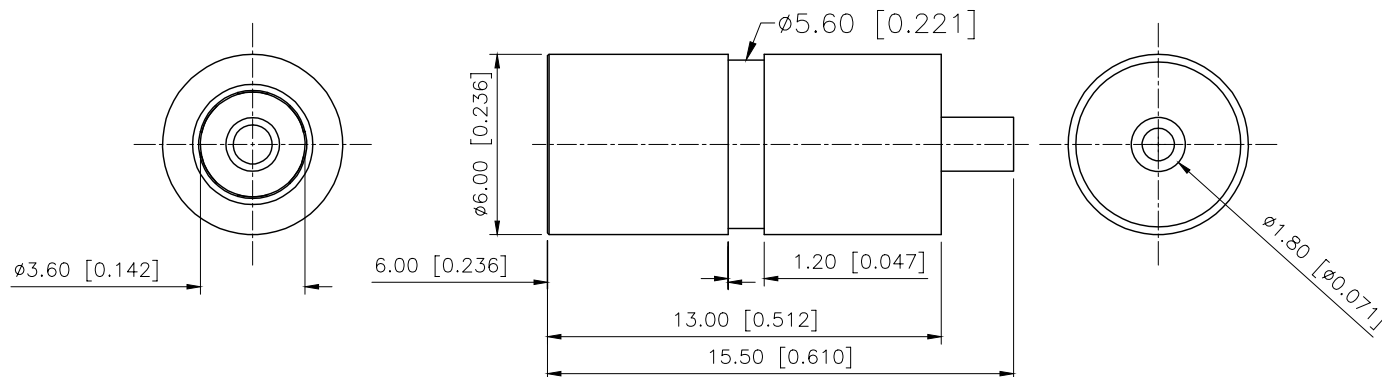

Technolo Request:

- 1.Outlook:
NO burr,no hurt.
- 2.Electronic performance:
a:Insulation resistance:
Above DC500V/100MΩ;
b:Endure voltage:
AC500V at 1 minute;
c:Contact resistance:
Under 30MΩ;
- 3.Insertion fore & withdrawal force;0.3-3kgf.
- 4.Salt spray test :24H.

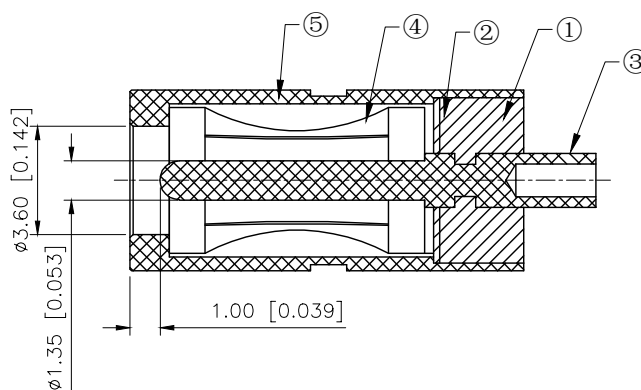

Waterproof tube	C3604	Ni
Spring	Phosphor Bronze	Ni
Terminal	C3604	Ni
Silicone pad		
Plastic	PA9T	Black
PAPT NAMF	MATERIAL	PLATING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	DC POWER JACK
CHECKED		UNIT:	mm/in	PART NO.:	DC-F1460
APPROVED		SIZE:	A4	DWG NO.:	DC-F1460
		SCALE	N/A	PAGE	1/1
				REVISION	A1

1

2

3

4