

AZ850

RELAY ORDERING DATA


SINGLE SIDE STABLE				
COIL SPECIFICATIONS				ORDER NUMBER
Nominal Coil VDC	Must Operate VDC	Max Continuous VDC	Coil Resistance ± 10%	
3	0.3	7.5	64.3	AZ850-3
5	0.5	12.5	178	AZ850-5
6	0.6	15.0	257	AZ850-6
9	0.9	22.5	579	AZ850-9
12	1.2	30.0	1,028	AZ850-12
24	2.4	48.0	2,880	AZ850-24
48	4.8	80.0	7,680	AZ850-48*

BISTABLE (LATCHING) SINGLE COIL				
COIL SPECIFICATIONS				ORDER NUMBER
Nominal Coil VDC	Must Operate VDC	Max Continuous VDC	Coil Resistance ± 10%	
3	2.3	8.7	90	AZ850P1-3
5	3.8	14.5	250	AZ850P1-5
6	4.5	17.4	360	AZ850P1-6
9	6.8	26.1	810	AZ850P1-9
12	9.0	34.8	1440	AZ850P1-12
24	18.0	57.6	3840	AZ850P1-24

BISTABLE (LATCHING) TWO COIL					
COIL SPECIFICATIONS					ORDER NUMBER
Nominal Coil VDC	Must Operate VDC	Max Continuous VDC	Coil Resistance		
			Coil I	Coil II	
3	2.3	6.0	45	45	AZ850P2-3
5	3.8	10.0	125	125	AZ850P2-5
6	4.5	12.0	180	180	AZ850P2-6
9	6.8	18.0	405	405	AZ850P2-9
12	9.0	24	720	720	AZ850P2-12
24	18.0	36	1920	1920	AZ850P2-24

*Not UL Approved

MECHANICAL DATA

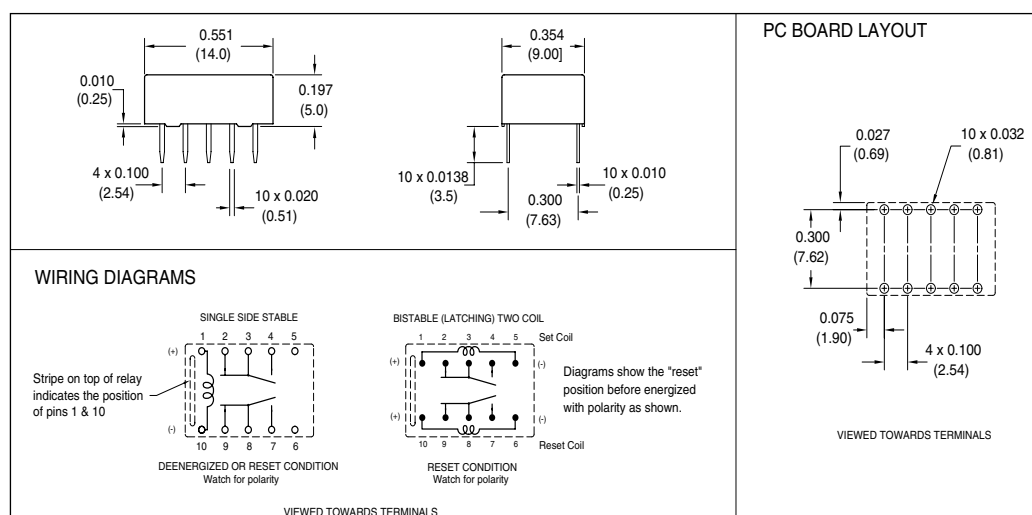

Dimensions in inches with metric equivalents in parentheses. Tolerance: ± 0.010 "

AMERICAN ZETTLER, INC.

www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM