
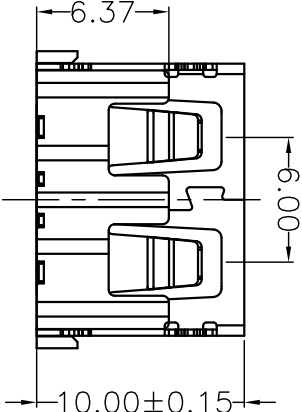
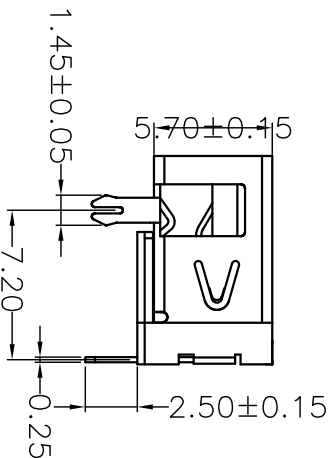
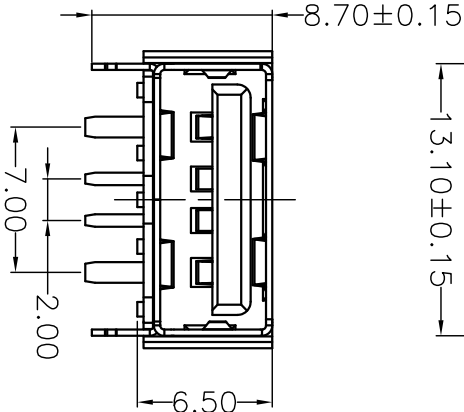
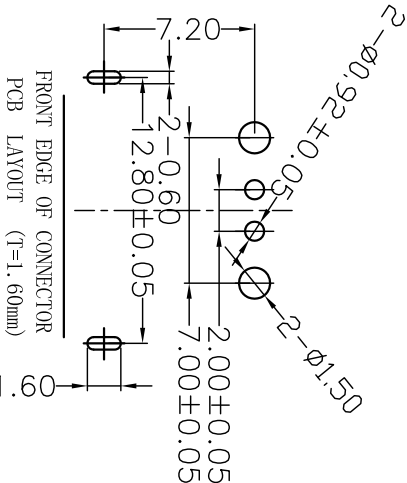


RoHS

Parts Drawing

REVISIONS			
SYM	ECN No.	MODIFICATION	DATE
			ISSUED




Note:

1. Material:
- 1.1, Housing: High temperature thermoplastic with/black g.f.f, UL94v-0
 - 1.2, Contact: copper alloy, t=0.25mm
 - 1.3, Shell: copper/Ferroalloy alloy, t=0.30mm
2. Specification:
- 2.1, Current rating: 5A Max.
 - 2.2, Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - 2.3, Contact resistance: 30 mΩ Max.
 - 2.4, Insulation resistance: 100 MΩ Min.
 - 2.5, Total mating force: 3.57 Kgf Max.
 - 2.6, Total unmating force: 1.0 Kgf Min.
3. Finish:
- 3.1, Contact: Plated Gold in Mating Area: Tin On Solder Tails
4. Environmental:
- 4.1, Temperature range: -55°C~85°C

Shell: Nickel Plating

PART ON:

918-15XXXXXXDXXX

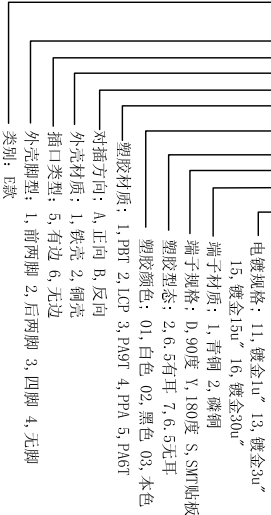

深圳市精拓金电子有限公司

DRAWN	PART NO. SEE PART ON			
CHECKED	TITLE			
APPROVED		AF10.0D款大电流前两脚无边		
		铜壳PA9T橙色172C/DIP15U"-H6.5		
		TOLERANCE		
		.XXX±.10, .XX±.25, .X±.38, ANG±5°		
		SCALE		
		1:1		
		SHEET		
		1 OF 1		
		SIZE		
		A4		
		REV.		
		X1		