
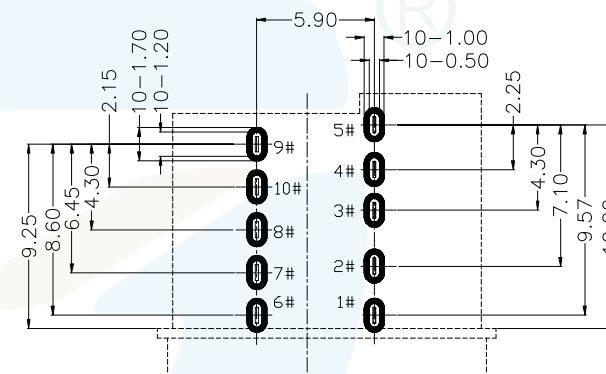
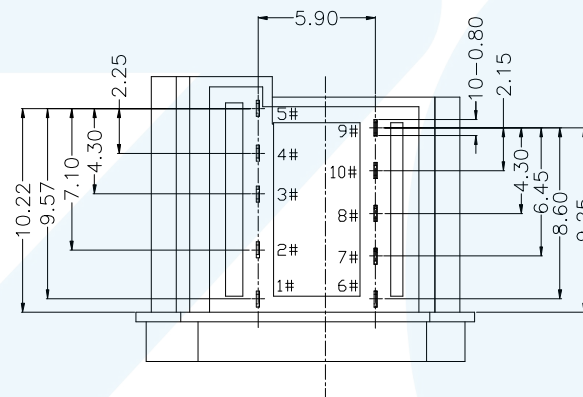
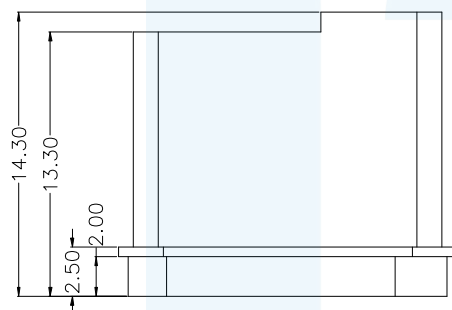

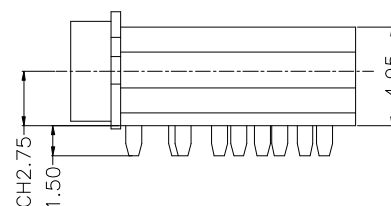
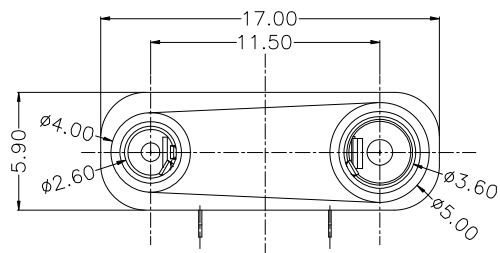


RoHS
Compliant

ZONE	EC N.O.	DESCRIPTION	DRAWING	DATE
A		INITIAL	林生财	2020.02.18


Notes:

- 1.Current Rating: 12V&1A max.
- 2.Contact Resistance: 100mOhms Max.(initial)
- 3.Insulation Resistance: 100M Ohms Min./500V DC
- 4.Dielectric Withstanding Voltage: 500V AC/1Minute
- 5.2.5mm Mating Force: 35N Max, Withdrawal Force: 3N Min.
- 3.5mm Mating Force: 35N Max, Withdrawal Force: 3N Min.
- 6.Durability: 5,000 Cycles
- 7.Operating Temperature: -25°C to +85°C




RECOMMEND PCB LAYOUT
TOLERANCE: ±0.05

2.5mm 4Pole Circuit Diagram



3.5mm 4Pole Circuit Diagram



12	Cover	Thermoplastics	Black UL 94-V0
11	Housing		
10	2.5mm Switch	Stainless Steel	G/F'On Contact Area Sn on Solder Tails Ni Plated Overall.
9	2.5mm Left		
8	2.5mm Right		
7	2.5mm GND		
6	2.5mm Mic		
5	3.5mm Switch		
4	3.5mm Left		
3	3.5mm Right		
2	3.5mm GND		
1	3.5mm Mic		
Item	Name	Material	Description

LZG

LZG INDUSTRIAL CO. LTD

DRAWING:	林生财	DATE:	2020.02.18	SCALE	1:1
CHECK:	李宏鑫	DATE:	2020.02.18	MATERIAL	*
APPROVAL:	杨进宝	DATE:	2020.02.18	DWG. NO.	
DRAWING NO.	ZB35025-10DBAP-A			SHEET	1/1

PART NAME	WATERPROOF 035+25 PHONE JACK	TOLERANCE UNLESS	0.0±0.3	0.°±2°	UNIT: mm	
PART NO.	ZB35025-10DBAP-A	OTHERWISE SPECIFIED:	0.00±0.2	0.0°±1°		

0.000±0.1

0.00°±0.5°