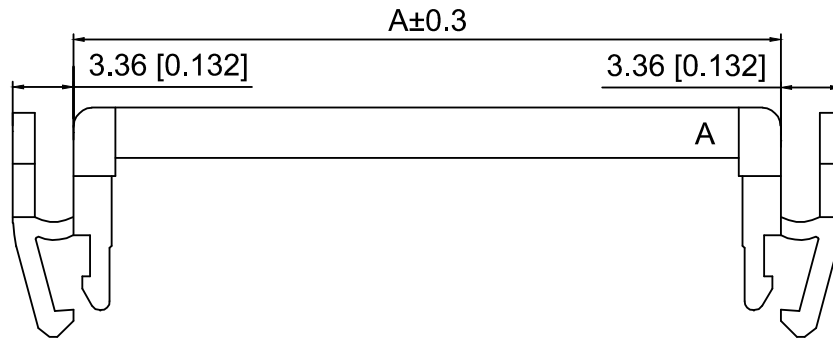


#### Specifications:

规格:

Voltage rating:250V AC/DC

额定电压: 250V AC/DC

Current rating:1A AC/DC

额定电流: 1A AC/DC

Withstanding voltage:500V AC/minute

耐受电压: 500V AC/分钟

Temperature range:-40℃-+105℃

温度范围: -40℃-+105℃

Insulation resistance: 1000MΩ min

绝缘电阻: 1000MΩ Min

Contact resistance:20mΩ Max

接触电阻: 20mΩ Max

**X2001 HA3 -2x04- PT V01**

① ② ③ ④ ⑤

1.Series No

2.Category:HA3-Three piece double contact with bow button

3.Row No.Pin No:2xXX-2x03P-2x30P

4.Material:PT-PBT Glass Fiber UL94V-0

5.Plating:V01-Gold Flash

| Poles | Dimensions |       | Poles | Dimensions |       |
|-------|------------|-------|-------|------------|-------|
|       | A          | B     |       | A          | B     |
| 2x03  | 11.20      | 4.00  | 2x13  | 31.20      | 24.00 |
| 2x04  | 13.20      | 6.00  | 2x14  | 33.20      | 26.00 |
| 2x05  | 15.20      | 8.00  | 2x15  | 35.20      | 28.00 |
| 2x06  | 17.20      | 10.00 | 2x17  | 39.20      | 32.00 |
| 2x07  | 19.20      | 12.00 | 2x18  | 41.20      | 34.00 |
| 2x08  | 21.20      | 14.00 | 2x20  | 45.20      | 38.00 |
| 2x09  | 23.20      | 16.00 | 2x22  | 49.20      | 42.00 |
| 2x10  | 25.20      | 18.00 | 2x25  | 55.20      | 48.00 |
| 2x11  | 27.20      | 20.00 | 2x30  | 65.20      | 58.00 |
| 2x12  | 29.20      | 22.00 | /     |            |       |

|                     |                 |               |                    |
|---------------------|-----------------|---------------|--------------------|
| X2001HA3-2x04-PTV01 | PBT Glass Fiber | Brass         | X2001W             |
| PART NO             | Material        | Material(Pin) | Suitable XKB Wafer |

|                         |      |  |                                                                                             |                                    |              |                |
|-------------------------|------|--|---------------------------------------------------------------------------------------------|------------------------------------|--------------|----------------|
| }                       | DSND |  | SCALE: N/A                                                                                  | MODEL TYPE:<br>2.0mm IDC Connector |              |                |
|                         | DWN  |  | VIEW:  | PART NO.:<br>X2001HA3-2x04-PTV01   |              |                |
|                         | CHKD |  | UNIT: mm/in                                                                                 | DWG NO.:<br>X-X2001HA3-2x04-PTV01  |              |                |
|                         | APPD |  | SIZE: A4                                                                                    |                                    |              |                |
| L PRECISION CO.,LIMITED |      |  |                                                                                             | WEIGHT                             | SHEET<br>1/1 | REVISION<br>A0 |

**XKLB**

XKB INDUSTRIAL PRECISION CO.,LIMITED

|                                               |  |  |  |  |                        |      |
|-----------------------------------------------|--|--|--|--|------------------------|------|
|                                               |  |  |  |  | ANGULAR                | ±5°  |
| ΔX                                            |  |  |  |  | L≤ 4                   | ±0.2 |
| ΔX                                            |  |  |  |  | 4<L≤ 16                | ±0.3 |
| ΔX                                            |  |  |  |  | 16<L≤ 63               | ±0.4 |
| MARK                                          |  |  |  |  | L> 63                  | ±0.5 |
| REVISIONS                                     |  |  |  |  | UNSPECIFIED TOLERANCES |      |
| www.helloxkb.com www.helloxkb.cn www.xk-dg.cn |  |  |  |  |                        |      |