

Jumper - BRIDGE-PT 2 - 2904490

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

3-phase loop bridge for 2 CONTACTRON modules, with push-in connection and 22.5 mm housing width, connecting cable: 3 m, with ferrules included.




Your advantages

- Bridging of 2 to 10 devices with maximum module spacing of 22.5 mm
- Considerable reduction in wiring
- Up to 575 V AC/3 x 25 A

RoHS

Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 842655
GTIN	4046356842655

Technical data

Dimensions

Length of the connecting cable	3 m
--------------------------------	-----

General

Operating voltage range	42 V AC ... 575 V AC
Operating current	≤ 25 A
Number of bridgeable modules	2
Connecting cable length	3 m
Color	gray
Conductor cross section	2.5 mm ²


Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Jumper - BRIDGE-PT 2 - 2904490

Drawings

Application drawing

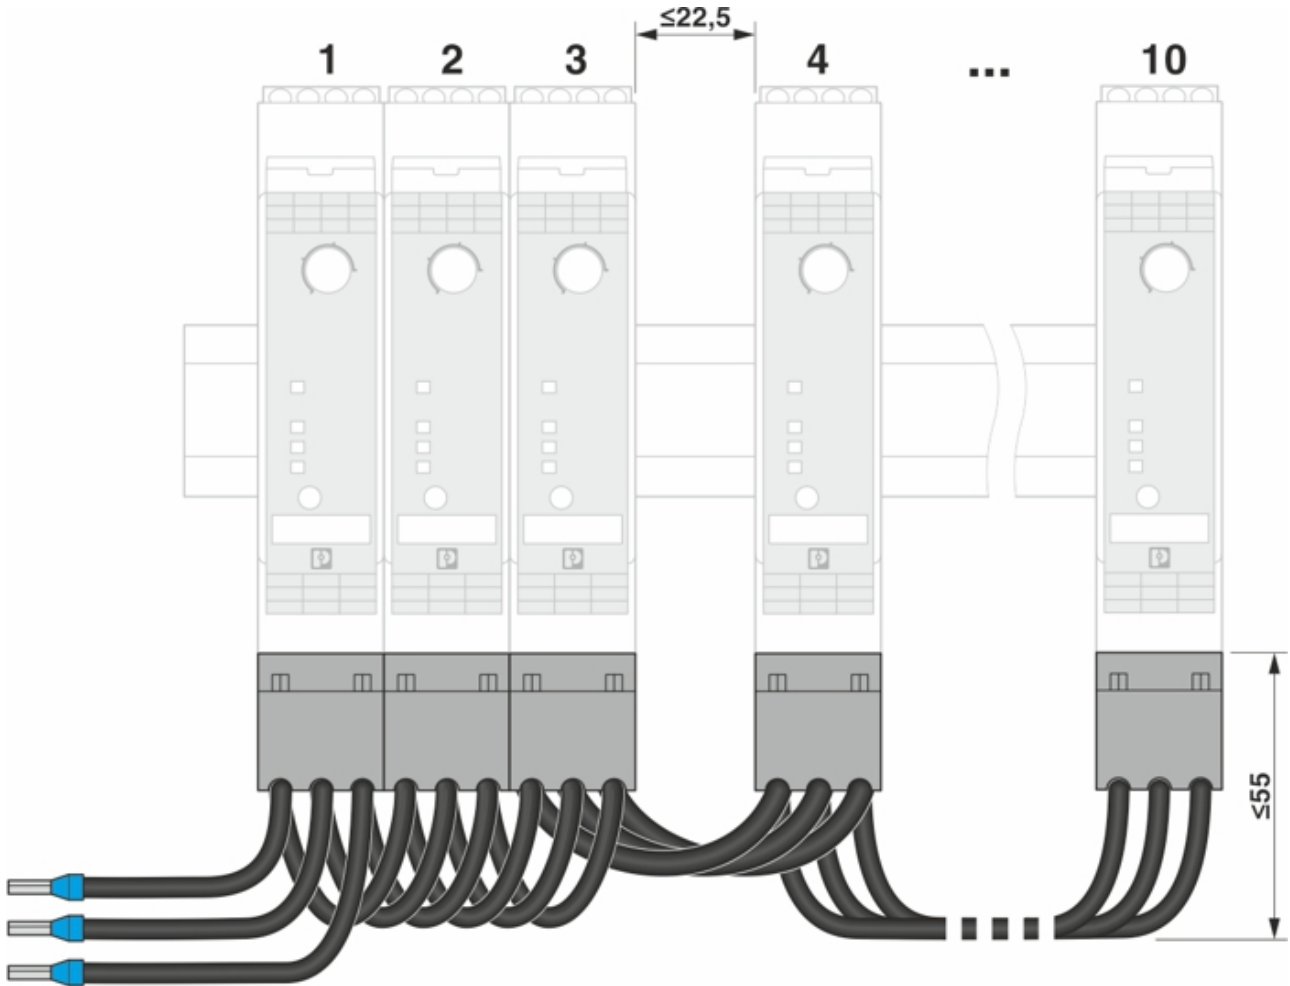

Approvals

Approvals

Jumper - BRIDGE-PT 2 - 2904490

Approvals

Approvals

UL Listed / cUL Listed / UL Listed / cUL Listed / EAC

Ex Approvals

Approval details

UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 228652
cUL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 228652
UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 172140
cUL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 172140
EAC			RU C- DE.A*30.B.01742

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>