

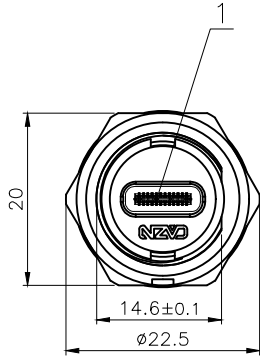




接线定义		
P1	功能定义	P2
A4、A9 B4、B9	VCC	1
B5	CC2	2
A11 B11	RX+	3
A7、B7	D-	4
A10 B10	RX-	5
A6、B6	D+	6
A3、B3	TX-	7
A5	CC1	8
A2、B2	TX+	9
A1、A12 B1、B12	GND	10



A
P1

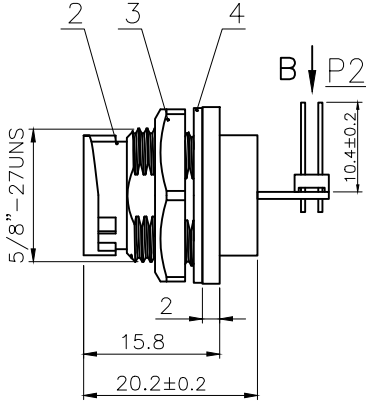


面板开孔尺寸



VIEW A

4	E10 座子防水垫片Ø20.3×Ø15.4-1	硅胶	黑色	pc	1
3	E10 塑胶六角螺母5/8-27UNS	PA66	黑色	pc	1
2	E10 卡扣式板后Type C母头插座外壳 (正成LOGO)	PA66	黑色	pc	1
1	Type C 母头+PCB板+排针90度	/	/	pc	1
No.	Specification	Material	Treat	Unit	Q'ty

技术参数:		材料:	
插拔次数:	≥500	接触体材料:	磷青铜/黄铜
额定电流:	1A	外壳、绝缘部件:	高性能工程塑料
工作温度:	-40℃~80℃	防水圈:	硅胶
防水等级:	IP67/IP68		
接触电阻:	<40mΩ		
绝缘电阻:	>100MΩ		
耐电压:	≧AC 100V / 1 分钟		
阻燃等级:	UL94-V0		

GENERAL TOLERANCE (UNLESS SPECIFIED) ≤10 ±0.1 <10~≤20 ±0.2 <20~≤50 ±0.5 Angle ±1°  THIRD ANGLE	DWN 胡俊明 2024. 10. 10			
	CHK			
	APVD		TITLE E10B-FT3-PPF-90	
UNIT MM	REV A	PART NO		
SIZE A4	SHEET 1 OF 1	DRAWING NO C130205-00059		