


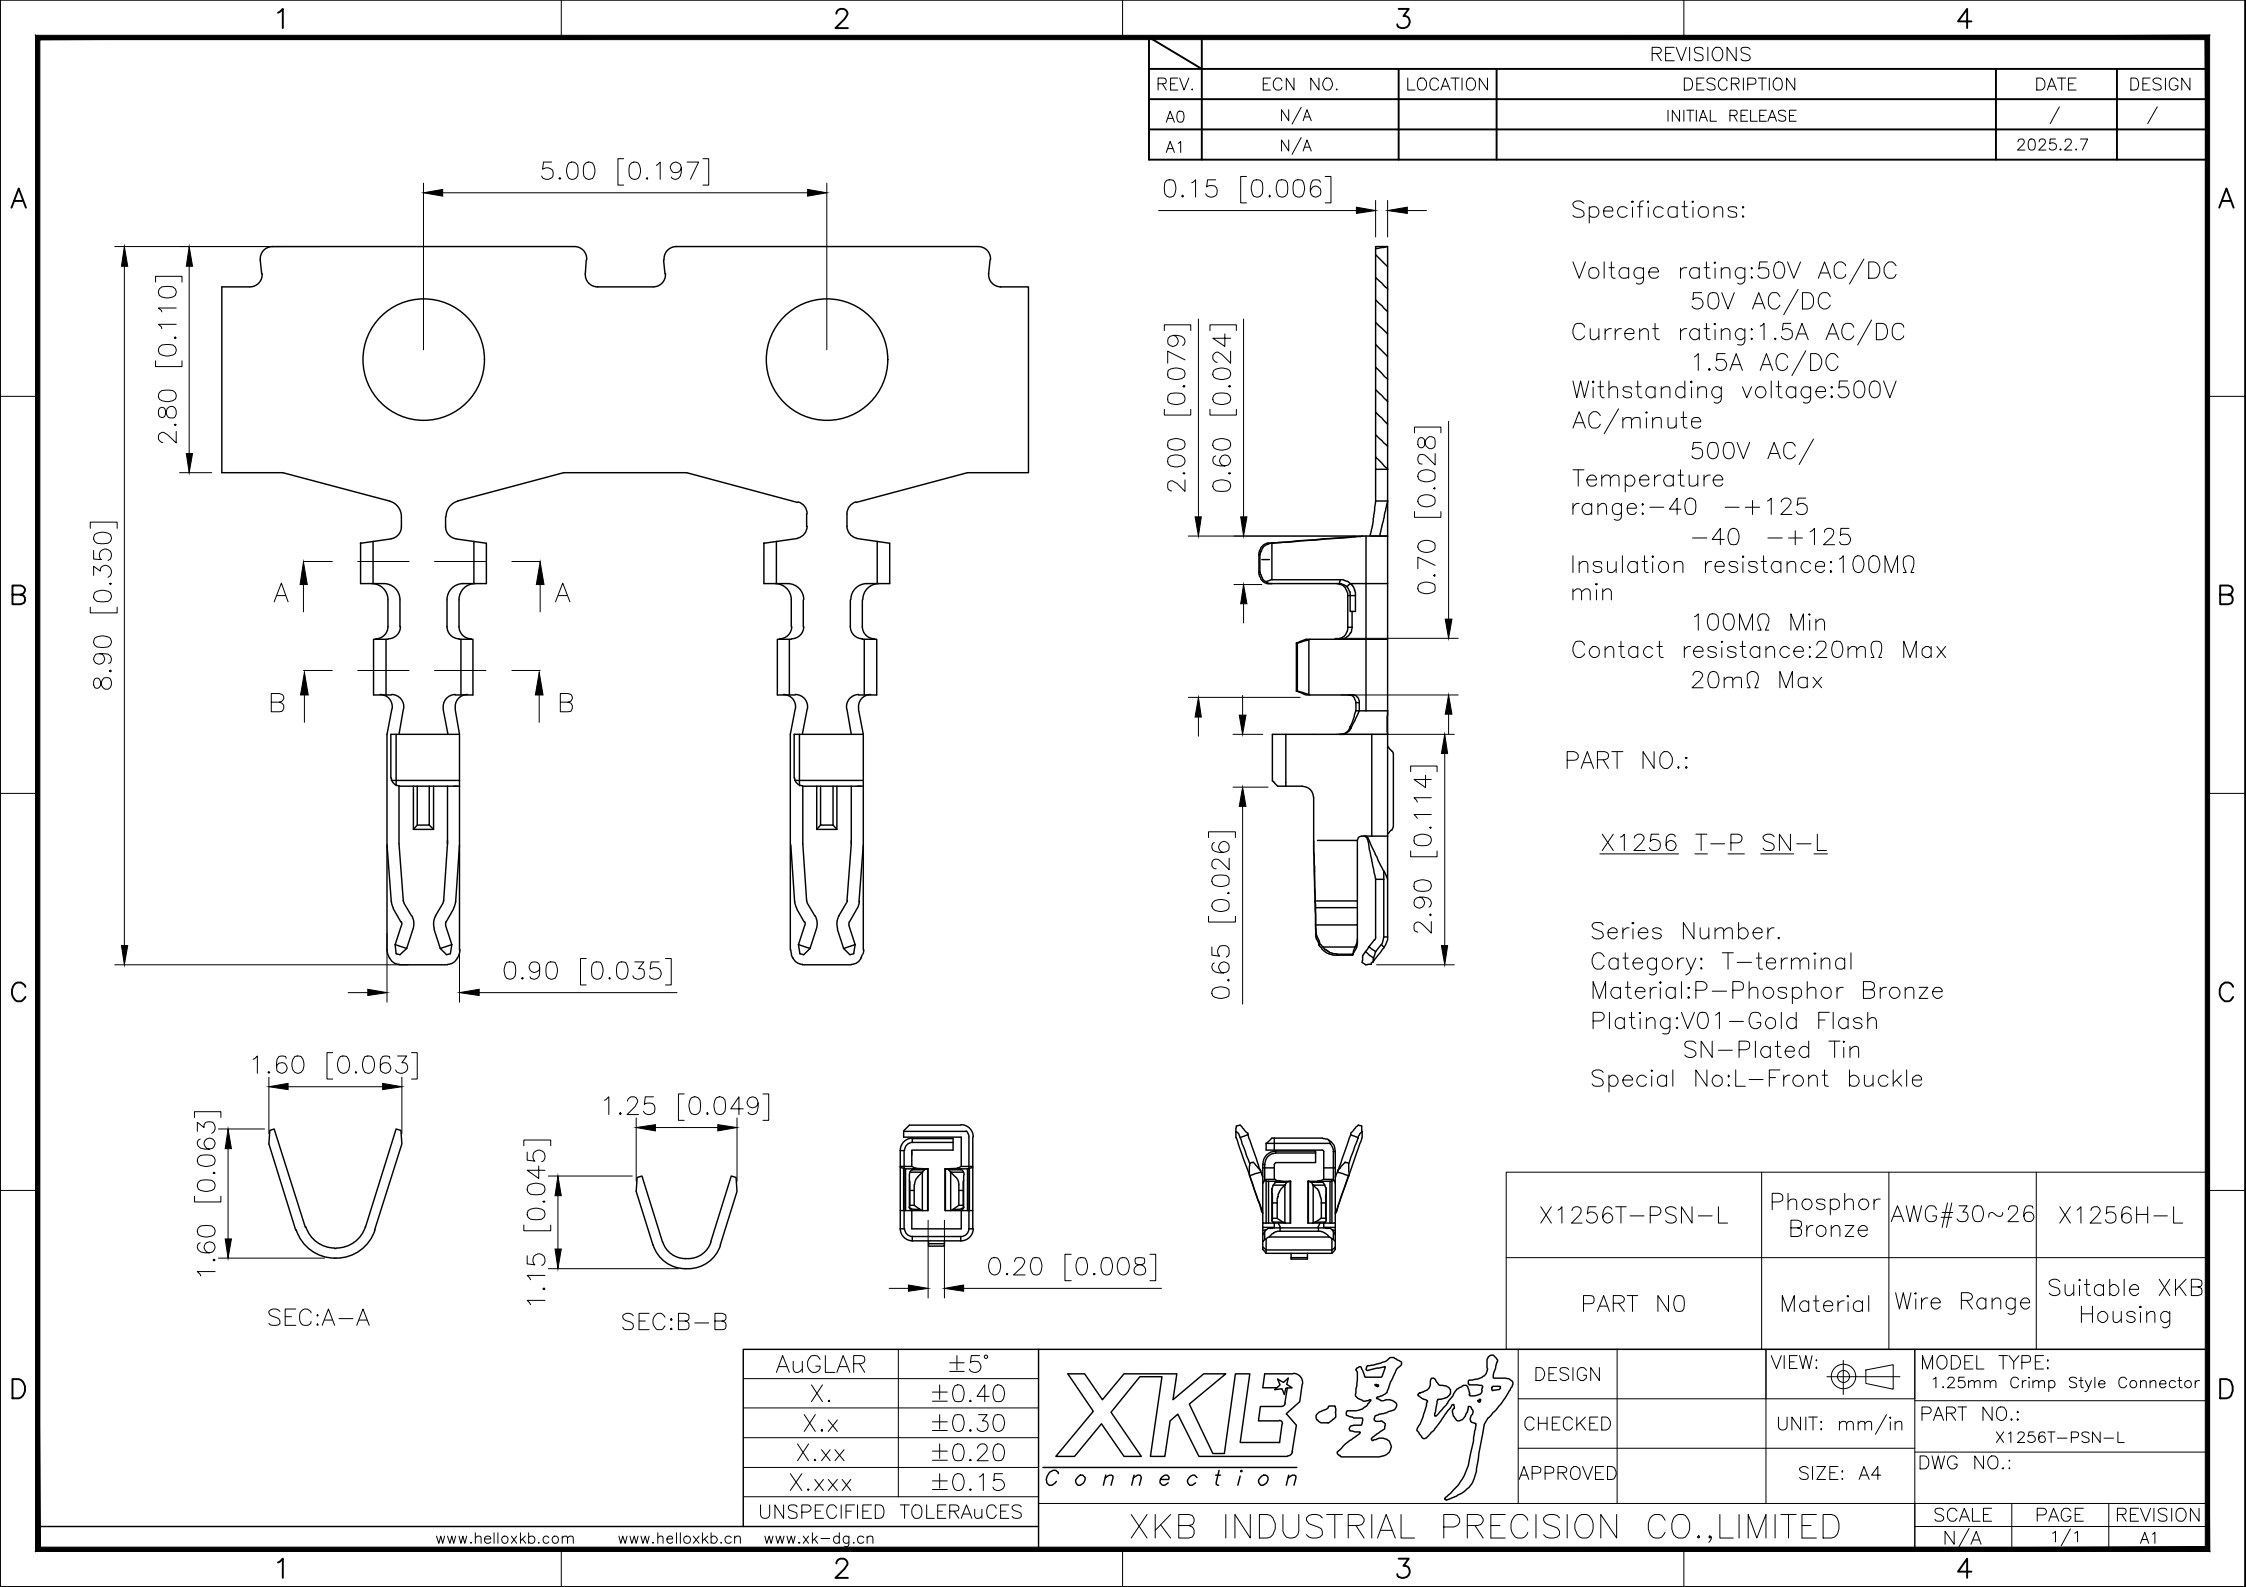

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A			2025.2.7	

Specifications:

Voltage rating:50V AC/DC
50V AC/DC
Current rating:1.5A AC/DC
1.5A AC/DC
Withstanding voltage:500V
AC/minute
500V AC/
Temperature
range:-40 -+125
-40 -+125
Insulation resistance:100MΩ
min
100MΩ Min
Contact resistance:20mΩ Max
20mΩ Max

PART NO.:

X1256 I-P SN-L

Series Number.
Category: T-terminal
Material:P-Phosphor Bronze
Plating:V01-Gold Flash
SN-Plated Tin
Special No:L-Front buckle

X1256T-PSN-L	Phosphor Bronze	AWG#30~26	X1256H-L
PART NO	Material	Wire Range	Suitable XKB Housing
DESIGN		VIEW:	MODEL TYPE: 1.25mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X1256T-PSN-L
APPROVED		SIZE: A4	DWG NO.:
XKB INDUSTRIAL PRECISION CO.,LIMITED			SCALE N/A
			PAGE 1/1
			REVISION A1

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	

