



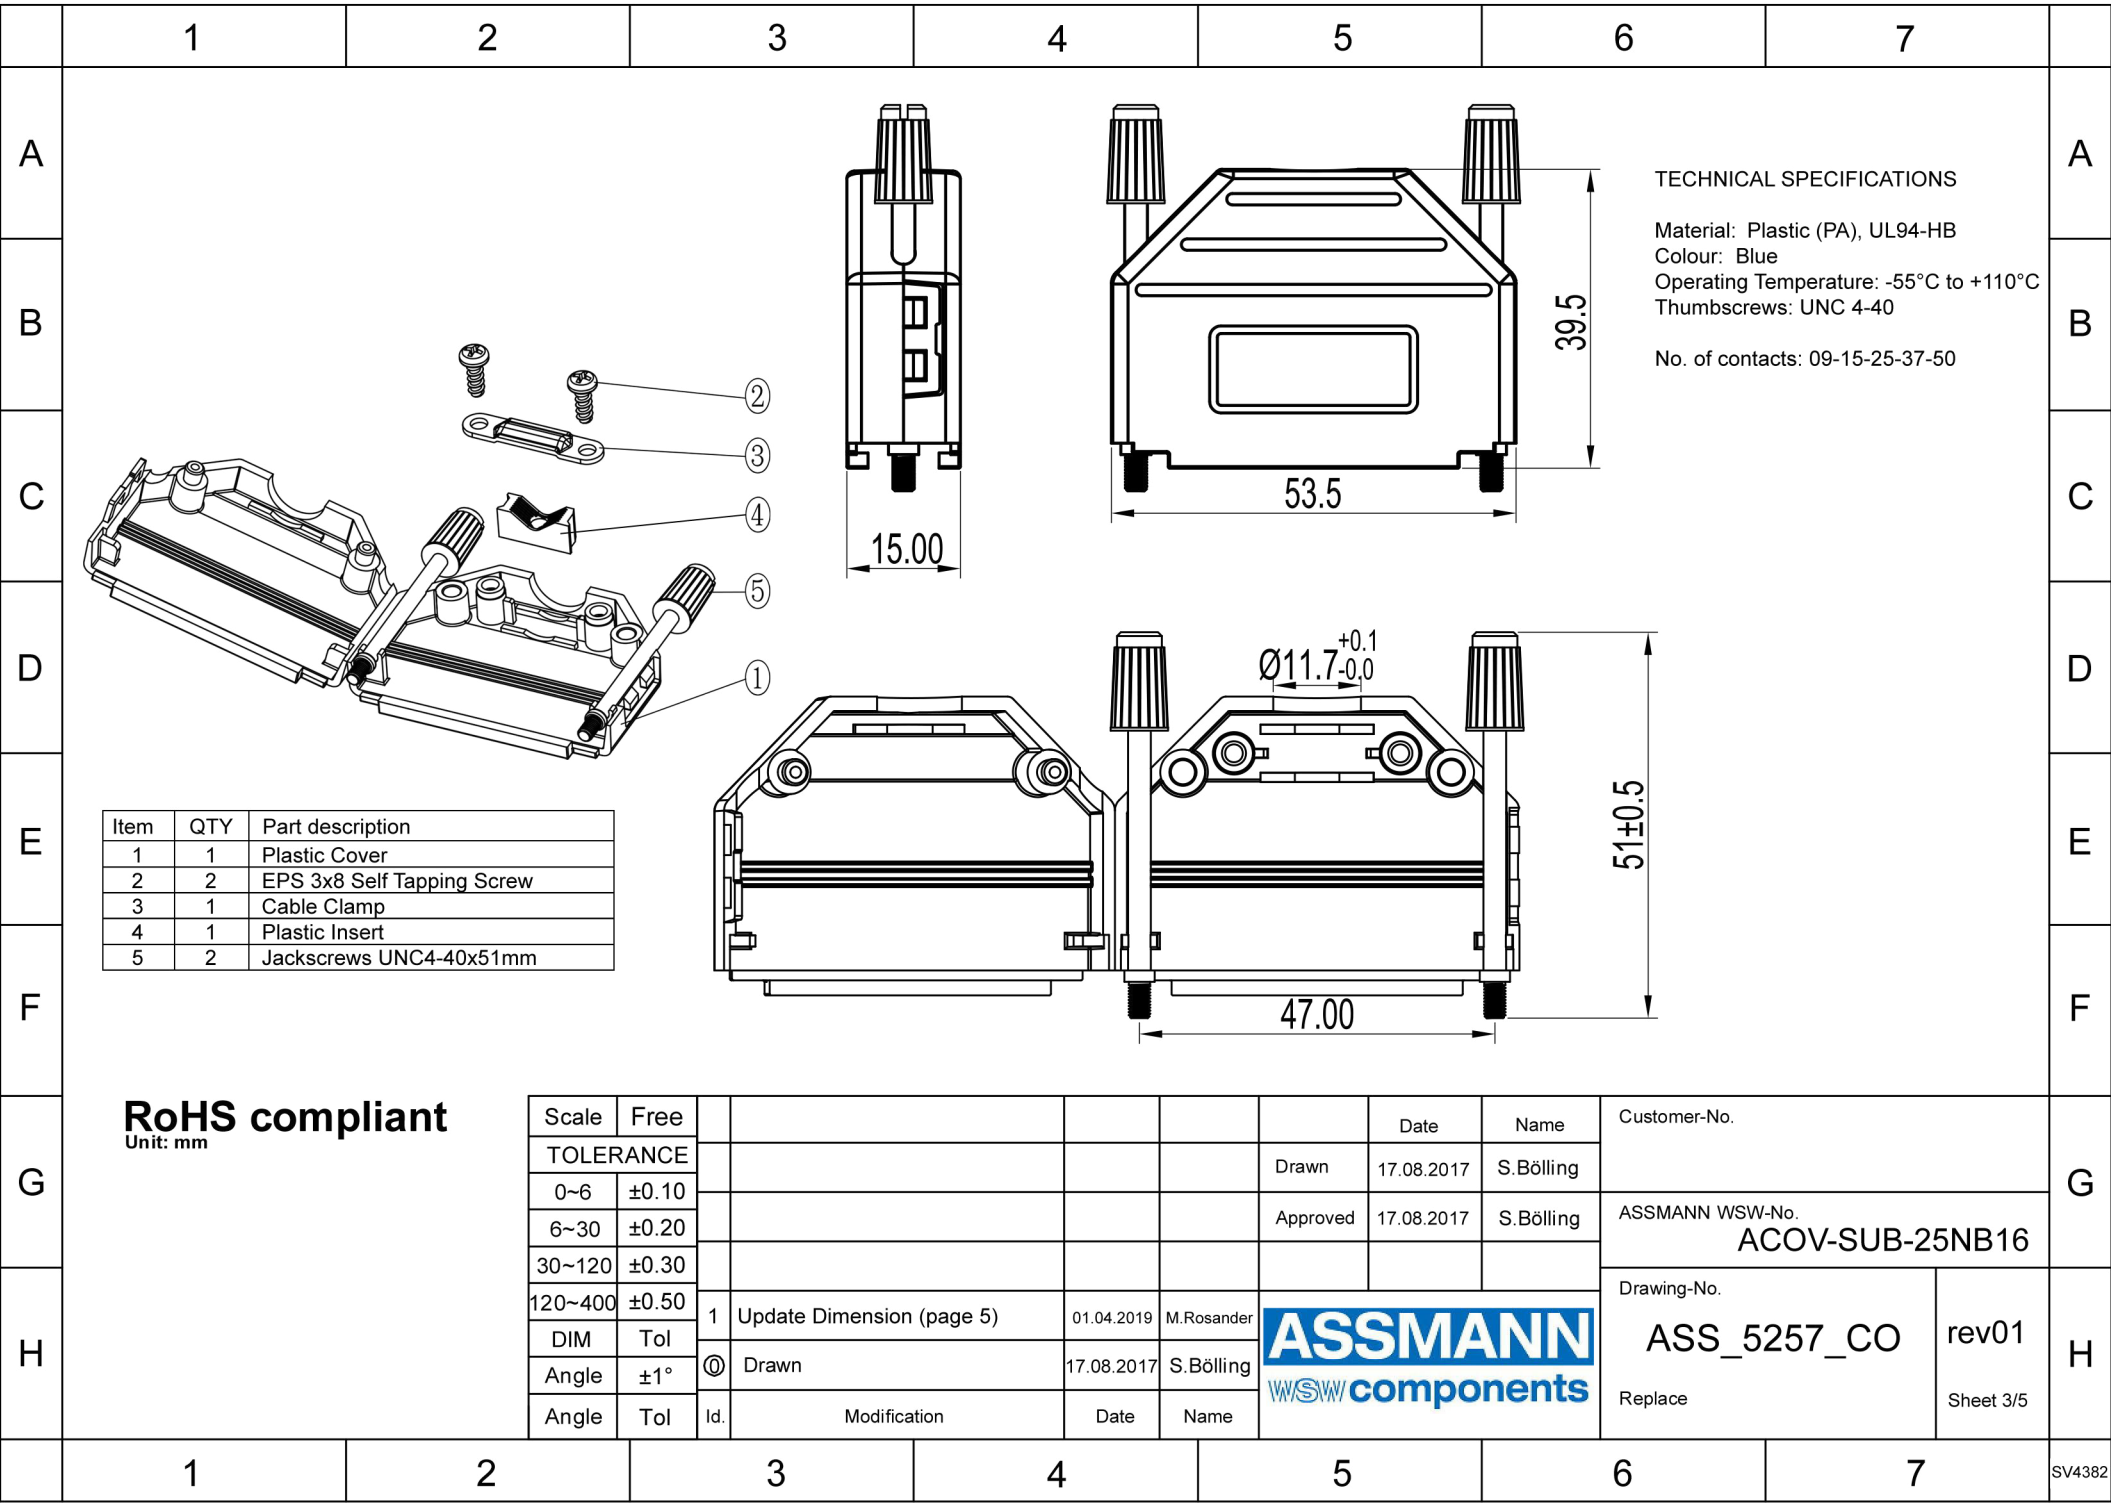

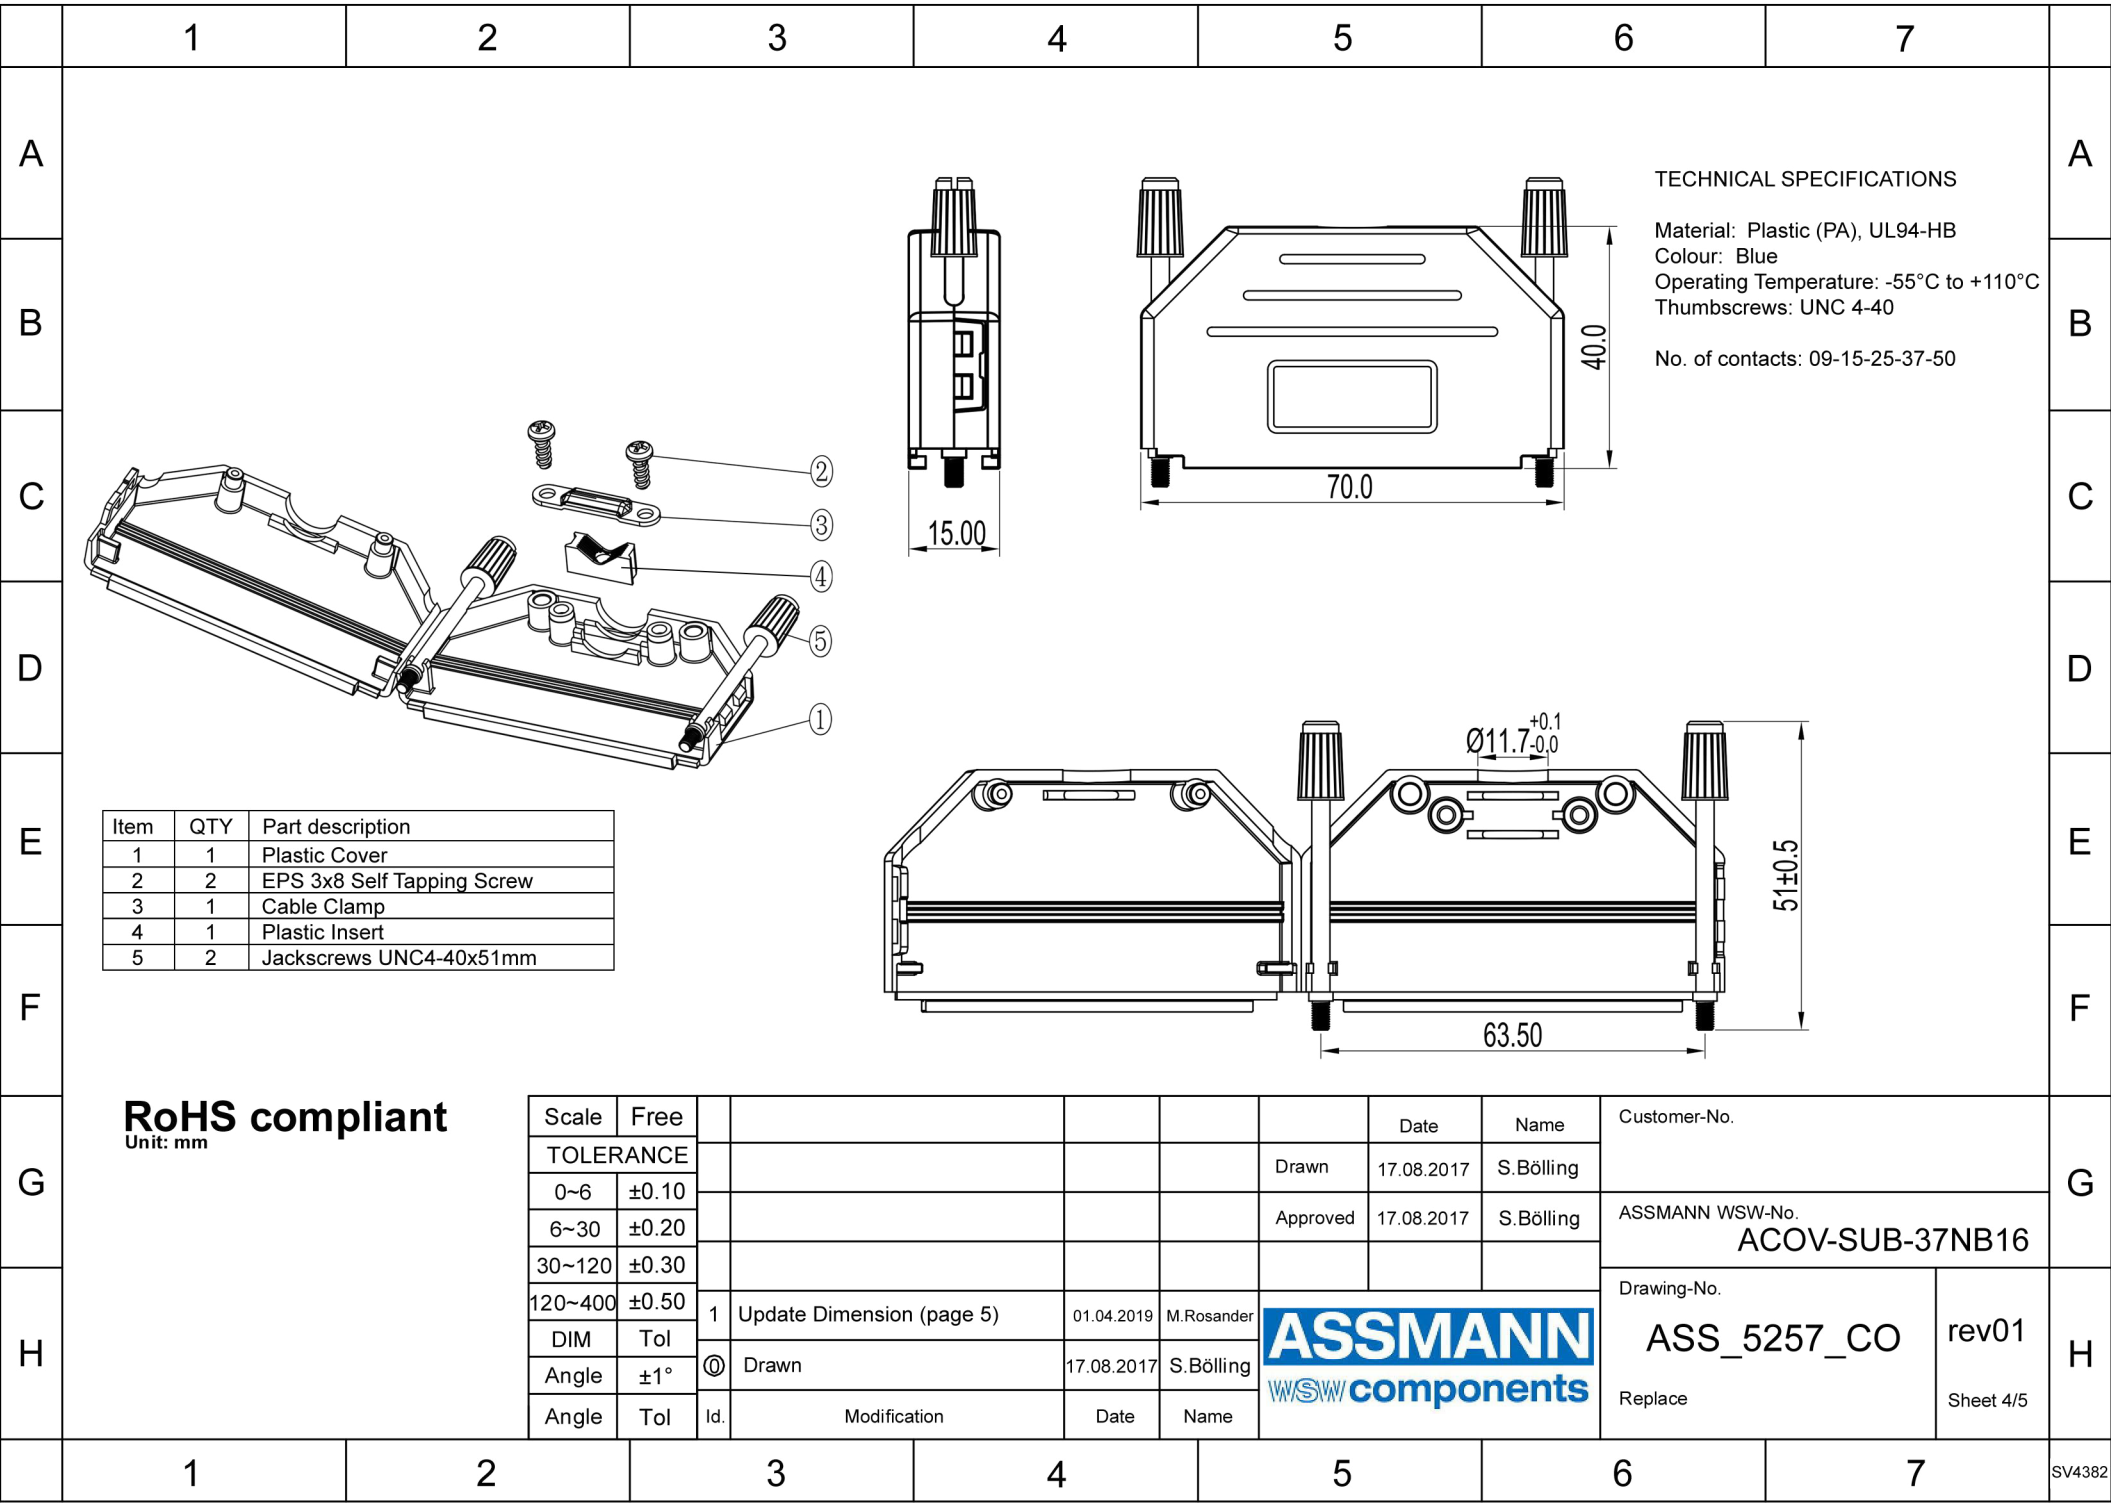

1

2

3

4

5

6

7

A

B

C

D

E

F

G

H

1

2

3

4

5

1

2

3

4

5

Item	QTY	Part description
1	1	Plastic Cover
2	2	EPS 3x8 Self Tapping Screw
3	1	Cable Clamp
4	1	Plastic Insert
5	2	Jackscrews UNC4-40x51mm

1

2

3

4

5

1

2

3

4

5

15.00

67.5

40.0

61.00

51±0.5

Ø14.0^{+0.1}_{-0.0}

TECHNICAL SPECIFICATIONS

Material: Plastic (PA), UL94-HB

Colour: Blue

Operating Temperature: -55°C to +110°C

Thumbscrews: UNC 4-40

No. of contacts: 09-15-25-37-50

RoHS compliant

Unit: mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE						Drawn	17.08.2017	S.Bölling
0~6	±0.10					Approved	17.08.2017	S.Bölling
6~30	±0.20							
30~120	±0.30							
120~400	±0.50	1	Update Dimension (page 5)	01.04.2019	M.Rosander	ASSMANN WSW components ASS_5257_CO rev01 Replace Sheet 5/5		
DIM	Tol	Ⓢ	Drawn	17.08.2017	S.Bölling			
Angle	±1°							
Angle	Tol	Id.	Modification	Date	Name			

1

2

3

4

5

6

7

SV4382