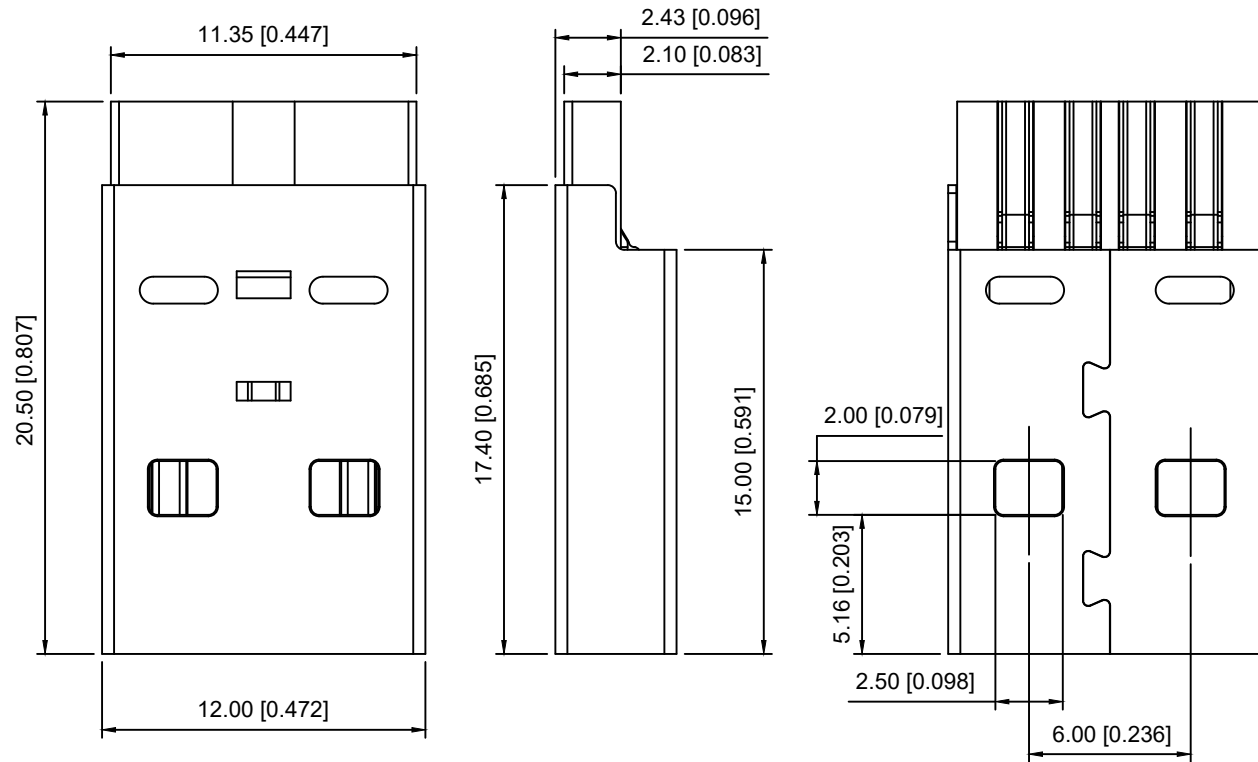


U216-041N-1WS82-1

1: Au 1U"
6: Au 30U"

1: SPCC 5: BRASS

B: Black W: White

1: PBT
2: PA6T
3: PA9T
4: LCP

NOTE 备注:

1. MATERIAL 材质:

1.1. HOUSING 胶壳: PBT BLACK

1.2. TERMINAL 端子: H62 T=0.18mm

PLATING 电镀: GF Au AND Tin 100u"MIN

1.3. SHELL 外壳: SPCC T=0.30mm

PLATING 电镀: Ni 100u" MIN

2. ELECTRICAL (电气特性):

2.1. THE VOLTAGE & CURRENT RATE (额定电压和电流):

30V AC, 2.0-3.0A MAX;

2.2. WITHSTANDING VOLTAGE (耐压强度):

250V AC / 1 minute 漏电流 0.5mA Max;

2.3. CONTACT RESISTANCE (导通阻抗):

30mΩ ohms Max AT 100mA;

2.4. INSULATION RESISTANCE (绝缘阻抗):

100M ohms Min AT 20°C;

3. MECHANICAL (物理特性):

3.1. MATING FORCE (插入力): 3.50kgf MAX;


3.2. UNMATING FORCE (拔出力): 1.00kgf Min;

3.3. LIFE TEST (寿命测试): 5000cyc les min;

200cyc les/hour;

4. SALT SPRAY TEST TIME: 48H

5. 符合 RoHS, REACH

						DSND		SCALE: N/A	MODEL TYPE: USB 2.0				
					ANGLAR	±5°		DWN		VIEW: 	PART NO.: U216-041N-1WS82-1		
ΔX					L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.: U216-041N-1WS82-1		
ΔX					4<L ≤ 16	±0.3		APPD		SIZE: A4			
ΔX					16<L ≤ 63	±0.4							
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63	±0.5							
					UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED				WEIGHT	SHEET	REVISION
												1/1	A0
					www.helloxkb.com www.helloxkb.cn www.xk-dg.cn								