
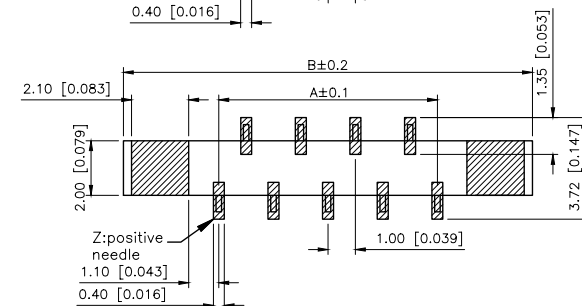
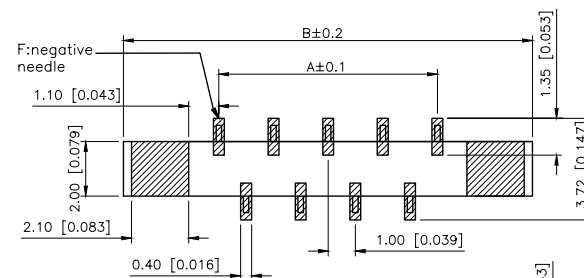

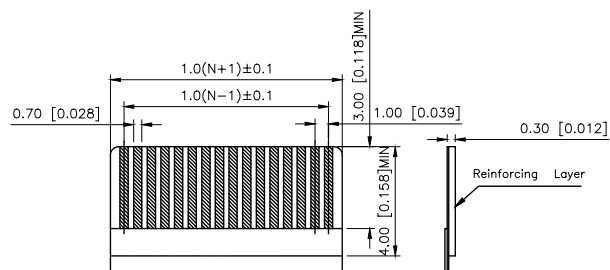
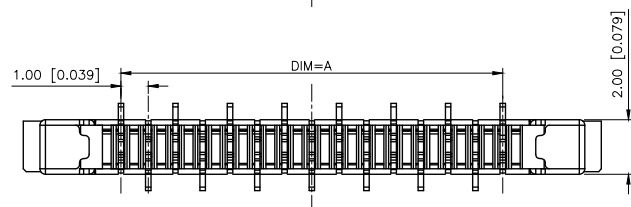
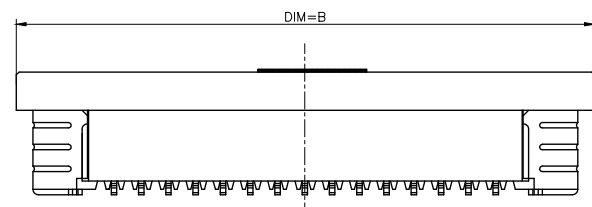
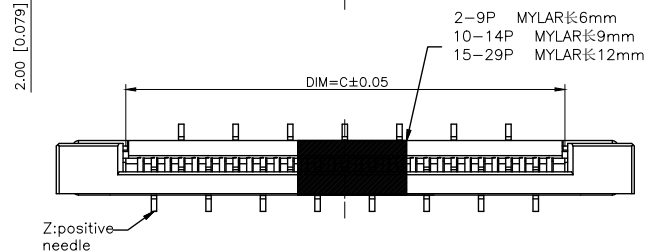


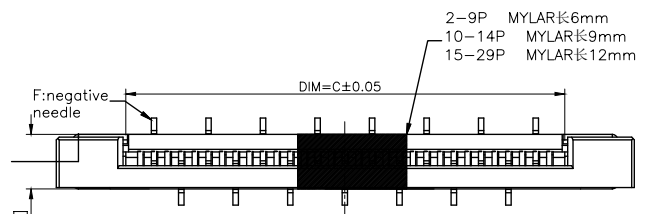

1.FPC NOT MATING CONDITION BANNED CLOSURE
2.PART NO. LEGEND

PART NO.:

X10C20 08 I Z
① ② ③ ④

①Series Name:X10C20=1.00mm Pitch(H:2.00mm)

②Number of terminals:XX=02-29PIN

③Plating : G:Gold Flash Over Nickel

T: Tin Over Nickel

④Z:positive needle F:negative needle

3.PERFORMANCE:

3.1: CURRENT RATING:0.5A/PIN

3.2: VOLTAGE RATING:50V(AC/DC)

3.3: CONTACT RESISTANCE: INITIAL VALUE 30mOHM Max.

3.4:INSULATION RESISTANCE:500MOHM Min.

3.5:DIELERIC WITHSTANDING VOLTAGE:250V AC FOR 1MINUTE.

3.6:DURABILT: 20 TIMES Min

3.7:OPERATING TEMPERATURE:-40℃~+85℃

OPERATING HUMIDITY RANGE:20% TO 85%

	REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.05.17	阿树

No. of Contacts	DIMENSIONS		
	DIM A	DIM B	DIM C
02	1.00	8.20	3.10
03	2.00	9.20	4.10
04	3.00	10.20	5.10
05	4.00	11.20	6.10
06	5.00	12.20	7.10
07	6.00	13.20	8.10
08	7.00	14.20	9.10
09	8.00	15.20	10.10
10	9.00	16.20	11.10
11	10.00	17.20	12.10
12	11.00	18.20	13.10
13	12.00	19.20	14.10
14	13.00	20.20	15.10
15	14.00	21.20	16.10
16	15.00	22.20	17.10
17	16.00	23.20	18.10
18	17.00	24.20	19.10
19	18.00	25.20	20.10
20	19.00	26.20	21.10
21	20.00	27.20	22.10
22	21.00	28.20	23.10
23	22.00	29.20	24.10
24	23.00	30.20	25.10
25	24.00	31.20	26.10
26	25.00	32.20	27.10
27	26.00	33.20	28.10
28	27.00	34.20	29.10
29	28.00	35.20	30.10

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树
RECOMMENDED	FFC
CHECKED	
APPROVED	

MODEL TYPE:	FPC CONNECTOR
-------------	---------------

PART NO.:	X10C2008TZ
-----------	------------

DWG NO.:	X10C2008TZ
----------	------------

SCALE	PAGE	REVISION
N/A	1/1	A1

www.helloxkb.com	www.helloxkb.cn	www.xk-dq.cn
------------------	-----------------	--------------

XKB INDUSTRIAL PRECISION CO.,LIMITED