

Pitch:2.00x2.00mm(0.079 " X0.079 ")
Female Header Dual Rows With Post S.M.T Type

ELETE
—Professional Connecting Solution—
HFLDM20 Series




Specifications

Current Rating:2.0 Ampere
Insulation Resistance:1000MΩ Min
Dielectric Withstanding:500V AC
Contact Resistance:20mΩ Max
Operating Temperature:-40℃ to +105℃


Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester,UL 94V-0
LCP/NL6T

All material RoHS&Reach Compliant
Halogen-free is available

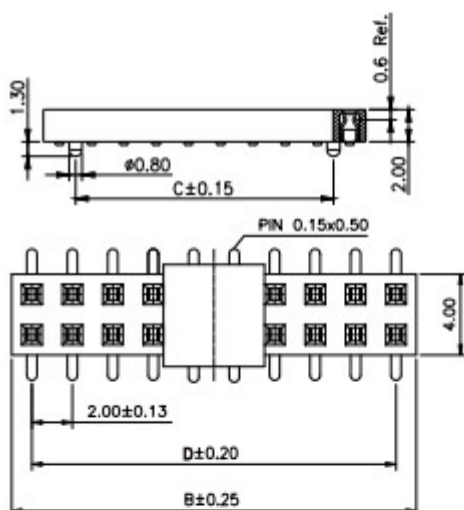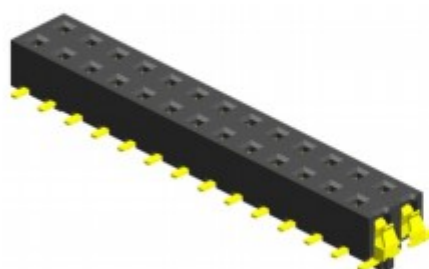

Recommended P.C.Board Layout



HMLDPXX

Mating with




HMLDSXX



BXLDSH01




HMLDSHXX



BXLDMH01



HMLDMHXX



BXLDS02



HMLDR43



BXLDM01



HMLDMXX



HMLDS43



HMLDRXX

PS:Suggested Mating Pin Length:1.6~2.0mm

No.1 of Pins/Row	Dimension Information			No.1 of Pins/Row	Dimension Information			No.1 of Pins/Row	Dimension Information			No.1 of Pins/Row	Dimension Information		
	C	D	B		C	D	B		C	D	B		C	D	B
03	2.00	4.00	6.00	13	22.00	24.00	26.00	23	42.00	44.00	46.00	33	62.00	64.00	66.00
04	4.00	6.00	8.00	14	24.00	26.00	28.00	24	44.00	46.00	48.00	34	64.00	66.00	68.00
05	6.00	8.00	10.00	15	26.00	28.00	30.00	25	46.00	48.00	50.00	35	66.00	68.00	70.00
06	8.00	10.00	12.00	16	28.00	30.00	32.00	26	48.00	50.00	52.00	36	68.00	70.00	72.00
07	10.00	12.00	14.00	17	30.00	32.00	34.00	27	50.00	52.00	54.00	37	70.00	72.00	74.00
08	12.00	14.00	16.00	18	32.00	34.00	36.00	28	52.00	54.00	56.00	38	72.00	74.00	76.00
09	14.00	16.00	18.00	19	34.00	36.00	38.00	29	54.00	56.00	58.00	39	74.00	76.00	78.00
10	16.00	18.00	20.00	20	36.00	38.00	40.00	30	56.00	58.00	60.00	40	76.00	78.00	80.00
11	18.00	20.00	22.00	21	38.00	40.00	42.00	31	58.00	60.00	62.00				
12	20.00	22.00	24.00	22	40.00	42.00	44.00	32	60.00	62.00	64.00				