
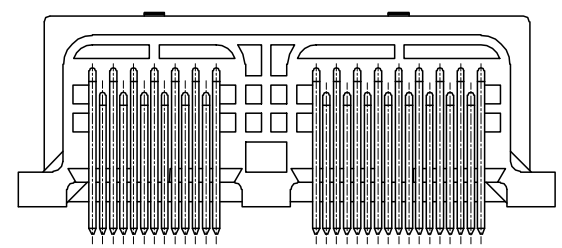
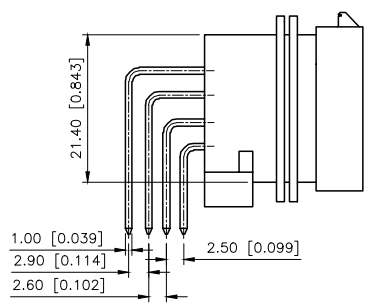
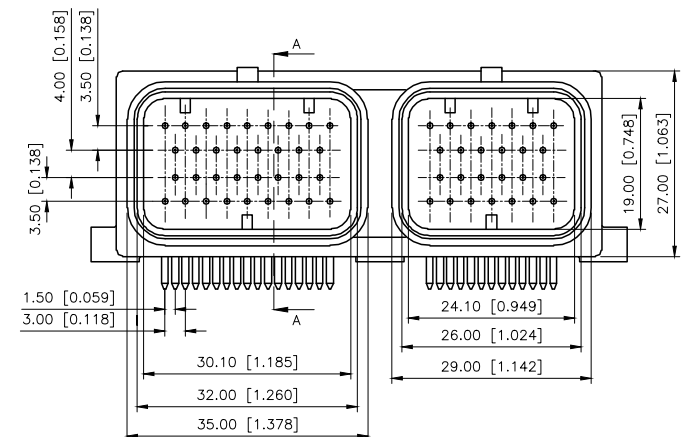
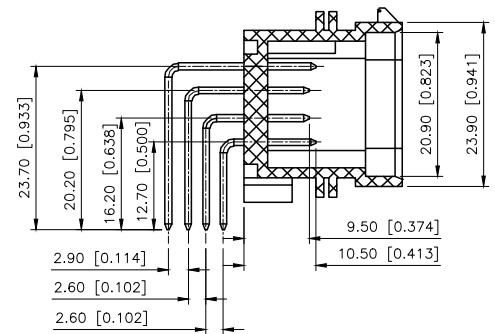
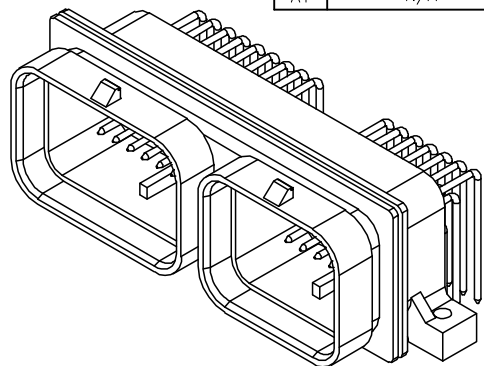


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.1.2	阿树


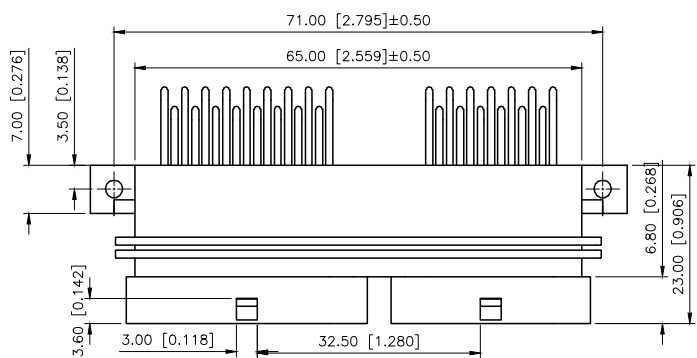


Current rating:10A AC/DC
额定电流: 10A AC/DC
Temperature range:-40℃--+125℃
温度范围: -40℃--+125℃

PART NO.:

K 643728 W R-60-PT SN
① ② ③ ④ ⑤ ⑥ ⑦

- ①K:XKBTEK-Car Connector
- ②XKB Series No
- ③Category:W-Wafer
- ④Welding Board Range:R-Stright 90°
- ⑤Row No.Pin No:60 Pin
- ⑥Material:PT-PBT
- ⑦Palting:SN-Plated Tin

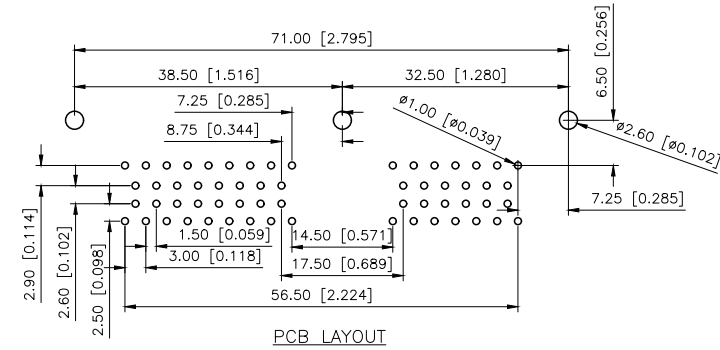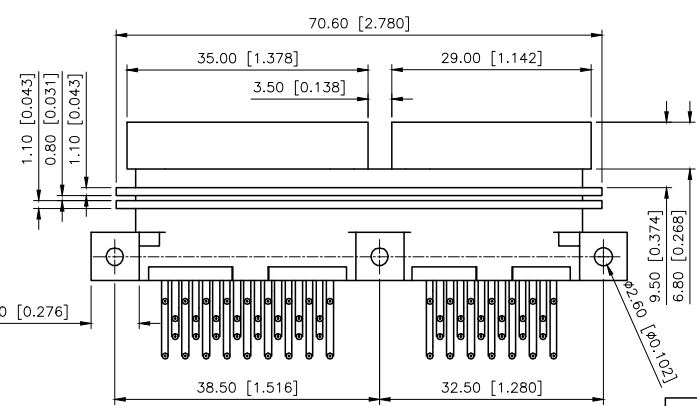

K643728WR-XX-PTS	PTS	Brass	K643728H
PART NO	Material	Material(Pin)	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 3.0mm Automobile connector
CHECKED		UNIT: mm/in	PART NO.: K643728WR-60-PTS
APPROVED		SIZE: A4	DWG NO.: