
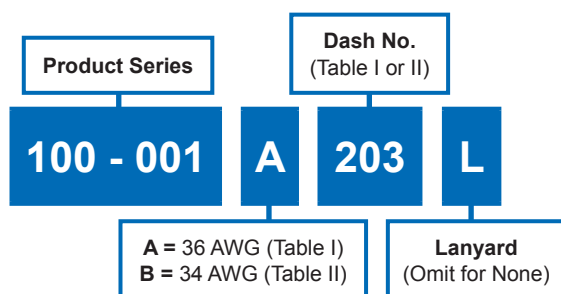



## 100-001 Tubular Metal Braid QQ-B-575B/A-A-59569 ASTM B298 Tin Coated Copper

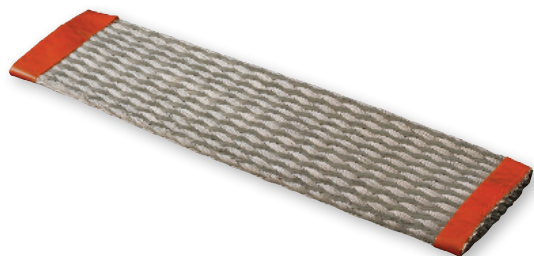

| Table I: 36 AWG |               |
|-----------------|---------------|
| Part No.        | I.D. (inches) |
| 100-001 A 031   | .031 (0.8)    |
| 100-001 A 062   | .062 (1.6)    |
| 100-001 A 078   | .078 (2.0)    |
| 100-001 A 109   | .109 (2.8)    |
| 100-001 A 125   | .125 (3.2)    |
| 100-001 A 156   | .156 (4.0)    |
| 100-001 A 171   | .171 (4.3)    |
| 100-001 A 188   | .188 (4.8)    |
| 100-001 A 203   | .203 (5.2)    |
| 100-001 A 250   | .250 (6.4)    |
| 100-001 A 375   | .375 (9.5)    |
| 100-001 A 500   | .500 (12.7)   |
| 100-001 A 625   | .625 (15.9)   |
| 100-001 A 781   | .781 (19.8)   |
| 100-001 A 937   | .937 (23.8)   |
| 100-001 A 1000  | 1.000 (25.4)  |
| 100-001 A 1125  | 1.125 (28.6)  |
| 100-001 A 1250  | 1.250 (31.8)  |
| 100-001 A 1375  | 1.375 (34.9)  |
| 100-001 A 1500  | 1.500 (38.1)  |
| 100-001 A 1562  | 1.562 (39.7)  |
| 100-001 A 2000  | 2 (50.8)      |
| 100-001 A 2300  | 2.300 (58.4)  |
| 100-001 A 2500  | 2.500 (63.5)  |
| 100-001 A 3375  | 3.375 (85.7)  |

| Table II: 34 AWG |               |
|------------------|---------------|
| Part No.         | I.D. (inches) |
| 100-001 B 062    | .062 (1.6)    |
| 100-001 B 109    | .109 (2.8)    |
| 100-001 B 125    | .125 (3.2)    |
| 100-001 B 171    | .171 (4.3)    |
| 100-001 B 203    | .206 (5.2)    |
| 100-001 B 375    | .375 (9.5)    |
| 100-001 B 437    | .437 (11.1)   |
| 100-001 B 500    | .500 (12.7)   |
| 100-001 B 781    | .781 (19.8)   |
| 100-001 B 1000   | 1.000 (25.4)  |
| 100-001 B 1250   | 1.250 (31.8)  |

## 100-002 Tubular Metal Braid QQ-B-575B/A-A-59569 ASTM B298 Silver Coated Copper

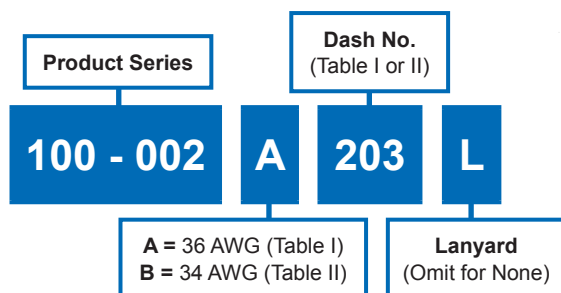

| Table I: 36 AWG |               |
|-----------------|---------------|
| Part No.        | I.D. (inches) |
| 100-002 A 031   | .031 (0.8)    |
| 100-002 A 062   | .062 (1.6)    |
| 100-002 A 078   | .078 (2.0)    |
| 100-002 A 109   | .109 (2.8)    |
| 100-002 A 125   | .125 (3.2)    |
| 100-002 A 156   | .156 (4.0)    |
| 100-002 A 171   | .171 (4.3)    |
| 100-002 A 188   | .188 (4.8)    |
| 100-002 A 203   | .203 (5.2)    |
| 100-002 A 250   | .250 (6.4)    |
| 100-002 A 375   | .375 (9.5)    |
| 100-002 A 500   | .500 (12.7)   |
| 100-002 A 625   | .625 (15.9)   |
| 100-002 A 781   | .781 (19.8)   |
| 100-002 A 937   | .937 (23.8)   |
| 100-002 A 1000  | 1.000 (25.4)  |
| 100-002 A 1250  | 1.125 (28.6)  |
| 100-002 A 1375  | 1.250 (31.8)  |
| 100-002 A 1500  | 1.375 (34.9)  |
| 100-002 A 2000  | 2 (50.8)      |
| 100-002 A 2500  | 2.500 (63.5)  |

| Table II: 34 AWG |               |
|------------------|---------------|
| Part No.         | I.D. (inches) |
| 100-002 B 062    | .062 (1.6)    |
| 100-002 B 109    | .109 (2.8)    |
| 100-002 B 125    | .125 (3.2)    |
| 100-002 B 171    | .171 (4.3)    |
| 100-002 B 203    | .206 (5.2)    |
| 100-002 B 375    | .375 (9.5)    |
| 100-002 B 437    | .437 (11.1)   |
| 100-002 B 500    | .500 (12.7)   |
| 100-002 B 781    | .781 (19.8)   |
| 100-002 B 1000   | 1.000 (25.4)  |
| 100-002 B 1250   | 1.250 (31.8)  |

Minimum order length is 100 ft. (30.5 M). Metric dimensions (mm) are in parentheses.