

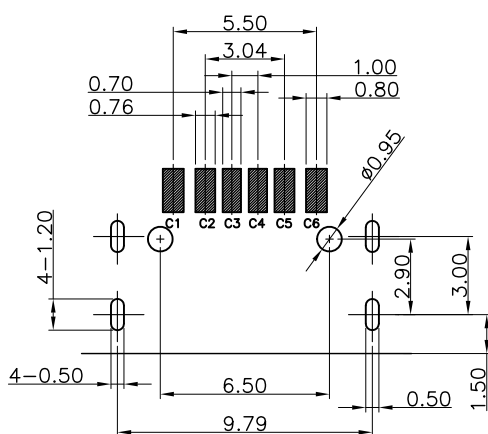

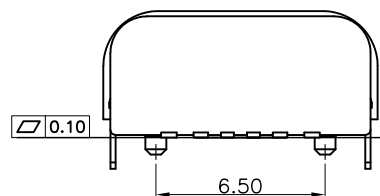

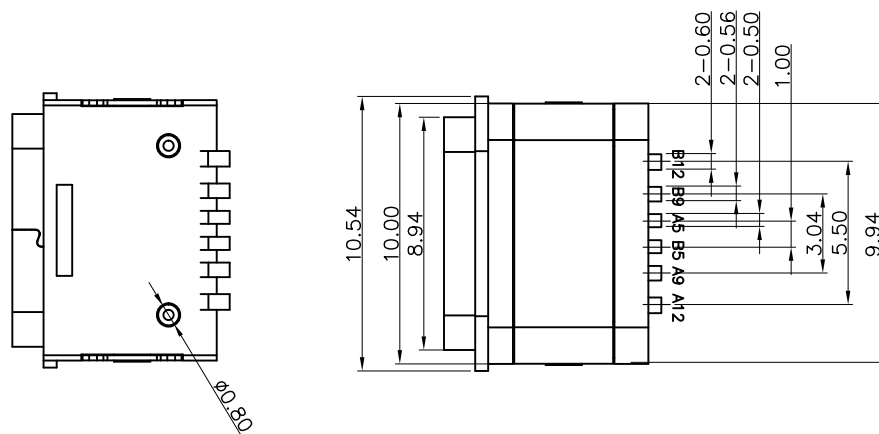


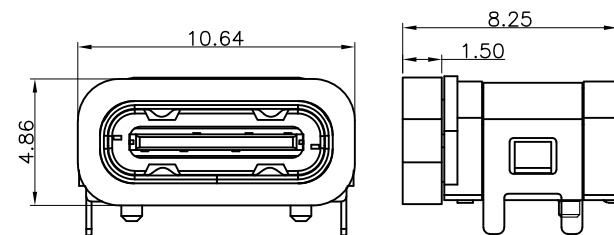

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

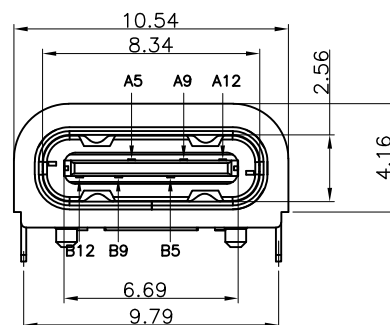

加防水圈示意图

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7.

PIN ASSIGNMENT:

PIN NO	A1&B12	A4&B9	A5	A5	A9&B4	A12&B1
SIGNAL NAME	GND	VBUS	CC1	CC2	VBUS	GND
PCB PAD NO.	C1	C2	C3	C4	C5	C6
6	防水圈		硅胶		BLACK	
5	SHELL		STAINLESS STEEL		NI Plated	
4	SHIELDING PLATE		STAINLESS STEEL		NI Plated	
3	CONTACT		COPPER ALLOY		TIN/Au/NI Plated	
2	SHELL HOUSING		HIGH TEMPERATURE PLASTIC		BLACK	
1	HOUSING		HIGH TEMPERATURE PLASTIC		BLACK	
NO.	DESCRIPTION	MATERIAL		REMARKS		QTY



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X' $\pm 2^{\circ}$ X.X' $\pm 0.5^{\circ}$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: USB TYPE C 防水母座6P DIP+SMT L=7.85带柱	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYCW346-USB C06-785B	MOLD NO.
UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2206211018	SHEET NO. 1 OF 1